### City of Belle Isle Job Site Card ROOFING PERMIT 2018-04-022



Pormit Number 2019 04 022

PERMIT MUST BE POSTED ON SITE - A permit expires in 6 months if approved inspections are not recorded /scheduled within that time frame. You are responsible for scheduling and keeping track of all your inspections -

Permit Number 2010-04-022	ISSUE Date. 04-09-20 18
Site Address: 5824 Labelle St. 32809	Parcel Number: 24-23-29-5306-03-060
Subdivision:	Class: Residential
Description of Work: Roof 34 Squares asphalt shir	ngles
Issued To: Gold Key Roofing	Business Phone: 407 851-0680
Name: Hewitt, Jeffrey Payment Date & Method: 4 / 9 / 2018	Contractor License CCC1329157
Payment Date & Method: Y / 9 / 2018	
Visa □ Master Card □ Amex □ Discover	□ Check / Money Order # <u>0767</u>
Schedule Inspections via Email at: <u>BIDs</u> SCHEDULE INSPECTIONS	
SCHEDULE INSPECTIONS	J D 1 MENI CO I OFF I INIE

Inspection Results Will Be Sent Out the Following Business Day

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

ROOF	INSPECTOR	DATE	COMMENTS
700 In-progress			
710 Final			

Inspection requests are to be emailed to BIDscheduling@UniversalEngineering.com; a confirmation email will be sent back to you upon scheduling. Next-Day Inspection requests must be made by 4pm. Please include the following in your request: Permit #, project address, type of inspection, date of the requested inspection, a contact name & a contact phone number. AM or PM may be requested but cannot be guaranteed.

> Universal Engineering Sciences - 3532 Maggie Blvd., Orlando, FL 3281 Tel 407-581-8161 \* Fax 407-581-0313 \* <u>www.universalengineering.com</u>



City of Belle Isle
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, 32811 Tel 407-581-8161 \* Fax 407-581-0313 \* www.universalengineering.com

### application for roofing permit

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE TOP SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

DATE OF APPLICATION:	ROOF PERMIT NUMBER 2018, 04-012
PLEASE PRINT. The undersigned hereby applies for a permit to make insta	
Project Address 5824 LABELLE ST	, Belle Isle, FL 2280932812
Property Owner MEUSSA M HOLDCRAF	Phone Phone
Property Owner's Mailing Address 5824 UARSEUTE	ST city ORUANUO
State 7 Zin Code 32809 Parcel of Mumber: Zi	1-23-29-5306-03-060
	nation, please visit http://www.ocpafl.org/Searches/ParcelSearch.aspx  Other  Other
Class of Building: Old New Type of Building: Residential Type of Work: New Roof ReRoof	Commercial Course Course
REQUIREDI Florida Product Approval Screen Printout from www.floridabu	Iding.org showing the Code Version
REQUIREDI Florida Product Approval Installation Instructions from www.fl	orldabuilding.org (not the manufacturer instructions)
REQUIRED! Copies of your General Liability & Worker's Comp Insurance C	ertificate & State and Local Licenses
Please indicate the nature of work by completing the information below:	1 11172 112
Roof Square Footage: Number of Stories: _	Job Valuation: \$14,672.43
Type: Asphalt Shingles Metal Modified Bitumen	Other:
I hereby certify that the above is true and correct to the best of my knowledge and mal agree to conform to all Florida Building Code Regulations and City Ordinances regula	ke Application for Permit as outlined above, and if same is granted attended and in accommance with plans submitted. The issuance
of this permit does not grant permission to violate any applicable Town and/or State of Republic Services is by legal contract the sole authorized provider of garbage, recycling	Florida codes and/or ordinances. By signing below, I recognize
collection and disposal services with the city limits of the City. Contractors, homeowne 407-293-8000 to setup accounts for Commercial, Construction Roll Off, or other services.	rs and commercial businesses may contact Republic Services at
Hall or from Republic Services. The City enjoydes the contract through its code enforce	ernent office. Failure to comply will result in a stop work order.
LICENSE HOLDER SIGNATURE	LICENSE # CC 132915 1
11071 C AVIANOT AF	MPANY NAME GOLDKEY
Street Address  City OLA State Zip Code	32800 Phone Number 407-851-0080
	NG. COM
	Zoning Fee \$
	Permit Fee \$
Building Official: Date 4.6	Review Fee \$
Was a second discount of the second of the s	6-20/8 % Florida Surcharge \$
Date Date	Total Permit Fee \$ 12.9.00
NOTE: The Building Permit Number is required if the Roof Installation is associat has been issued.	ed with any construction or alteration where a Building Permit  Building Permit Number
14x5 70	D. A. L.

P	ermit Number:	
F	olio/Parcel ID # 24-23-29-5306-03-860 DOCH 201801	98929 0:16:46 AM Page 1 of 1
	opared by. Gold Ney	99
_	rlando, FL 32806 Orange Count MB - Ret To:	GOLD KEY ROOFING
	eturn to: Gold Key	n (1000 1 1000 1 10 LOCAL (COLUMN 111)
48	374 S. Orange Ave.	
0	rlando, FL 32806	(a., Nethala in the APE) (b'., "a., "Phila de mant 111
		TOTAL COLD (FIG.) CONTRACTOR OF STATE
	NOTICE OF COMMENCEMENT	
St	ate of Florida, County of Orange	
Th	e undersigned hereby gives notice that improvement will be made to certain rea	property, and in accordance
wi	th Chapter 713, Florida Statutes, the following information is provided in this Not	ice of Commencement.
1.8	Description of property (legal description of the property, and street address LYNNWOOD SHO(ES Z) 62 LOT 6 BLK C	f available)
	LYNNWOOD SHOKES 4162 LOT 6 BUCC-	5824 LABELLE ST
2.	General description of improvement	0RUANO0 3280
•	ReRoof	
3.	Owner information or Lessee information if the Lessee contracted for the Name MEUSSA M HOUDCRAFT	improvement
	Name MCUSH MITIOUCKINI	2000
		2809
	Name and address of fee simple titleholder (if different from Owner listed al	
	Name N/A	ove)
	Address N/A	<del></del>
4.	Contractor	
	to a larger of the force that the	Number 407-851-0680
	Address 4874 S. Orange Ave. Orlando, FL 32806	Tumber 101 001 000
5.	Surety (if applicable, a copy of the payment bond is attached)	
	APPART CONTRACTOR AND ADDRESS OF THE APPART	Number N/A
		Bond \$ N/A
6.	Lender	· · · · · · · · · · · · · · · · · · ·
`	Name_N/A Telephone	Number N/A
)	Address N/A	
7.	Persons within the State of Florida designated by Owner upon whom noti	ces or other documents may
	be served as provided by §713.13(1)(a)7, Florida Statutes.	
	Name N/A Telephone	Number N/A
0	Address N/A	
Ō.	In addition to himself or herself, Owner designates the following to receive	e a copy of the Lienor's
	Notice as provided in §713.13(1)(b), Florida Statutes.  Name N/A  Telephone	N. N. N.
	Address N/A	Number N/A
Q	Expiration date of notice of commencement (the expiration date will be 1 ye	or from the data of recording
0.	unless a different date is specified) N/A	ar from the date of recording
	Time and a different date is specified)	
WARNIN	G TO OWNER: ANY PAYMENTS MADE BY THE OWNER AFTER THE EXPIRATION OF THE NO	OTICE OF COMMENCEMENT
ARE CO	NSIDERED IMPROPER PAYMENTS UNDER CHAPTER 713, PART I, SECTION 713.13, FLORID.	A STATUTES, AND CAN
RECORT	IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMM DED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION, IF YOU INTEND TO C	ENCEMENT MUST BE
WITH YO	OUR LENDER OR AN ATTORNEY BEFORE COMMENCING WORK OR RECORDING YOUR NOT	TOE OF COMMENCEMENT.
m	alian a M Nord and	
111	EUDDU 11. 9 1000 0194 )	Owner
Signature	of Owner or Lessee, or Owner's or Lessee's Authorized Officer/Director/Partner/Manager	Signatory's Title/Office
The fee	7/2 2/18	MENICON WILLIAM NO PACET
THE TOP	egoing instrument was acknowledged before me this 20day of 218 by	MICUSOFF INVIOLUCEM I
as	nerself for herself	name of person
	Type of authority, e.g., officer, trustee, attorney in fact  Name of party on behalf of who	om instrument was executed
(	7 11	O O
	Jemaa 1 Shot JESSICA 1	GRAC
-	Signature of Notary Public – State of Florida Print type or stamp.com	minimand name of National Date
3	Print, type, or stamp com	missioned name of Notary Public
Per	sonally KnownQB_ Produced ID X	100 May 100 May 100 May 100
	Section Control of the Control of th	F ViiC 4 NICOLE GRAF
,,	/// No. 100	- Public State of Florida
		min sien # CG 0885   0
	100	B.
Eoro	et a constant of the constant	CHARLES CONTRACTOR AND

Form content revised: 01/23/14



City of Belle Isle
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811
Tel 407-581-8161 \* Fax 407-581-0313 \* www.universalengineering.com

### Product Approval Form

			ct stamped	
duct Type	Manufa	turer	Model/Series	FL Product
unct Type				Approval #
	W	ATT WAR	els	
g				
3				
front				
Block				
	ROOL	NG (HIO		
alt Shingles	CERIA	INTER	HOPHINU	P1544
truct Metal				
ng Tiles				
Ply Roof				
<b>LEZLAY</b>	CEZTAI	NTEEL	KOOF	FLZ184
MENT			KUNNER	
		OTHER		
6 F I	ront Block  It Shingles truct Metal ag Tiles Ply Roof	ront Block  It Shingles  truct Metal ag Tiles Ply Roof  CLANCECIA	ront Block RECOGNIGATION It Shingles CECIANTES Truct Metal ag Tiles Ply Roof  CECLANCES TAINTEE VENT	ROOFING PROOFINGS It Shingles CECTANTED ASPHACT It griles Ply Roof

# **Business & Professional Regulation**



BCIS Home Log In User Registration Hot Topics Submit Surcharge Stats & Facts Publications

FBC Staff BCIS Site Map





Product Approval Menu > Product or Application Search > Application List > Application Detail

FL5444-R12 Application Type Revision Code Version 2017

Application Status Approved

Comments

Archived 

Product Manufacturer CertainTeed Corporation-Roofing

Address/Phone/Email 20 Moores Road

Malvern, PA 19355 (610) 893-5400

mark.d.harner@saint-gobain.com

Authorized Signature Mark Harner

mark.d.harner@saint-gobain.com

Mark D. Harner Technical Representative Address/Phone/Email 18 Moores Road

Malvern, PA 19355 (610) 651-5847

Mark.D.Harner@saint-gobain.com

Quality Assurance Representative

Address/Phone/Email

Category Roofing

Subcategory Asphalt Shingles

Compliance Method Evaluation Report from a Florida Registered Architect or a Licensed

Florida Professional Engineer

☐ Evaluation Report - Hardcopy Received

Florida Engineer or Architect Name who developed

the Evaluation Report

Florida License

Quality Assurance Entity

Quality Assurance Contract Expiration Date

Validated By

Robert Nieminen

PE-59166 UL LLC

03/09/2020

John W. Knezevich, PE

☑ Validation Checklist - Hardcopy Received

Certificate of Independence FL5444 R12 COI 2017 01 COI Nieminen.pdf

Referenced Standard and Year (of Standard)

Standard **Year ASTM D3161** 2016

Equivalence of Product Standards Certified By

Sections from the Code

Product Approval Method

Method 1 Option D

 Date Submitted
 09/07/2017

 Date Validated
 09/12/2017

 Date Pending FBC Approval
 09/15/2017

 Date Approved
 12/12/2017

 Date Revised
 01/24/2018

#### **Summary of Products**

FL # Model, Number or Name		Description	
5444.1 CertainTeed Asphalt Roof Shingles		3-tab, 4-tab, strip (no-cut-outs), laminated and architectural asphalt roof shingles	
Limits of Use Approved for use in Approved for use ou Impact Resistant: N, Design Pressure: N/ Other: Refer to ER Se	<b>tside HVHZ:</b> Yes /A	Installation Instructions  FL5444 R12 II 2017 09 FINAL ER CERTAINTEED ASPHALT  SHINGLES FL5444-R12.pdf  Verified By: Robert Nieminen, PE PE-59166  Created by Independent Third Party: Yes  Evaluation Reports  FL5444 R12 AE 2017 09 FINAL ER CERTAINTEED ASPHALT  SHINGLES FL5444-R12.pdf  Created by Independent Third Party: Yes	





Contact Us:: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. Copyright 2007-2013 State of Florida, :: Privacy Statement :: Accessibility Statement :: Refund Statement

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. \*Pursuant to Section 455.275 (1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click here.

**Product Approval Accepts:** 



Credit Card Safe

securityMETRICS



#### **EXTERIOR RESEARCH & DESIGN, LLC.**

Certificate of Authorization #9503 353 CHRISTIAN STREET, UNIT #13 OXFORD, CT 06478 (203) 262-9245

#### **EVALUATION REPORT**

**CertainTeed Corporation** 

20 Moores Road Malvern, PA 19355 (610) 651-5847 Evaluation Report 3532.09.05-R13

FL5444-R12

Date of Issuance: 09/22/2005 Revision 13: 09/05/2017

#### SCOPE:

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the **6**<sup>th</sup> **Edition (2017) Florida Building Code** sections noted herein.

**DESCRIPTION: CertainTeed Asphalt Roof Shingles.** 

**LABELING:** Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein and **FBC 1507.2.7.1 / R905.2.6.1** 

**CONTINUED COMPLIANCE:** This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. if the product changes or the referenced Quality Assurance documentation changes. Trinity | ERD requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

**ADVERTISEMENT:** The Evaluation Report number preceded by the words "Trinity|ERD Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

**INSPECTION:** Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 12.

Prepared by:

Robert J.M. Nieminen, P.E.

Florida Registration No. 59166, Florida DCA ANE1983



The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 09/05/2017. This does not serve as an electronically signed document.

#### **CERTIFICATION OF INDEPENDENCE:**

- Trinity|ERD does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
- 2. Trinity | ERD is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
- 3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
- 4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
- 5. This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.



#### **ROOFING SYSTEMS EVALUATION:**

#### 1. SCOPE:

**Product Category:** Roofing

Sub-Category: Asphalt Shingles

**Compliance Statement: CertainTeed Asphalt Roof Shingles**, as produced by **CertainTeed Corporation**, have demonstrated compliance with the following sections of the 6<sup>th</sup> **Edition (2017) Florida Building Code** and 6<sup>th</sup> **Edition (2017) Florida Building Code**, **Residential Volume** through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

#### 2. STANDARDS:

<u>Section</u>	<u>Property</u>	<u>Standard</u>	<u>Year</u>
1507.2.5, R905.2.4	Physical Properties	ASTM D3462	2010
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D3161	2016
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D7158	2011

#### 3. REFERENCES:

<b>Entity</b>	<u>Examination</u>	<u>Reference</u>	<u>Date</u>
UL (TST 1740)	ASTM D3161	94NK9632	05/15/1998
UL (TST 1740)	ASTM D3161	99NK26506	11/23/1999
UL (TST 1740)	ASTM D3161	03CA12702	05/27/2003
UL (TST 1740)	ASTM D3161	03CA12702	06/16/2003
UL (TST 1740)	ASTM D3161	03NK29847	10/03/2003
UL (TST 1740)	ASTM D3161	04CA11329	05/24/2004
UL (TST 1740)	ASTM D3161	04CA32986	12/03/2004
UL (TST 1740)	ASTM D3161	05NK07049	04/15/2005
UL (TST 1740)	ASTM D3161	05NK16778	05/12/2005
UL (TST 1740)	ASTM D3161	05CA16778	05/12/2005
UL (TST 1740)	ASTM D3161	05NK14836	05/22/2005
UL (TST 1740)	ASTM D3161	05NK22800	06/22/2005
UL (TST 1740)	ASTM D3462	R684	09/21/2005
UL (TST 1740)	ASTM D7158	05NK08037	06/28/2006
UL (TST 1740)	ASTM D3161 & D3462	09CA28873	07/23/2009
UL (TST 1740)	ASTM D3462	10CA41303	10/07/2010
UL (TST 1740)	ASTM D3161	10CA41303	10/08/2010
UL (TST 1740)	ASTM D7158	10CA41303	10/27/2010
UL (TST 1740)	ASTM D3161 & D3462	10CA44960	11/11/2010
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	13CA32897	11/21/2013
UL LLC (TST 9628)	ASTM D3161, D3462	TFWZ.R684	04/22/2014
UL LLC (TST 9628)	ASTM D7158	TGAH.R684	04/22/2014
UL LLC (TST 9628)	ASTM D3161 & D3462	4786334434	09/16/2014
UL LLC (TST 9628)	ASTM D3161 & D3462	4786570826	02/12/2015
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4786570717	12/16/2015
UL LLC (TST 9628)	ASTM D3161 & D3462	4787195678	02/09/2016
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787380356	10/26/2016
UL LLC (TST 9628)	ASTM D3462	4787380357	10/13/2016
UL LLC (TST 9628)	ASTM D7158	4787380357	11/08/2016
UL LLC (TST 9628)	ASTM D3161	4787380357	11/09/2016
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787586427	01/25/2017
UL LLC (QUA 9625)	Quality Control	Service Confirmation	Exp. 03/09/2020



#### 4. PRODUCT DESCRIPTION:

- 4.1 CT20™, XT™ 25, XT™ 30 and XT™ 30 IR are fiberglass reinforced, 3-tab asphalt roof shingles.
- 4.2 Arcadia™, Belmont®, Belmont® IR, Carriage House Shangle®, Grand Manor Shangle®, Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris and Landmark™ Solaris IR are fiberglass reinforced, laminated asphalt roof shingles.
- 4.3 **NorthGate™** is a fiberglass reinforced, laminated, SBS modified bitumen roof shingle.
- 4.4 Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™ and Presidential Solaris™ are fiberglass reinforced, architectural asphalt roof shingles.
- 4.5 Hatteras™, Highland Slate™ and Highland Slate™ IR are fiberglass reinforced, 4-tab asphalt roof shingles.
- 4.6 **Patriot™** is a fiberglass reinforced asphalt roof strip-shingle (with no cut-outs) providing a laminated appearance through an intermittent shadow line with contrasting blend drops for color definition.
- 4.7 Presidential Accessory, Accessory for Hatteras, Shangle Ridge™, Shadow Ridge™, Cedar Crest™, Cedar Crest™ IR, NorthGate Ridge and NorthGate Accessory are fiberglass reinforced accessory shingles for hip and ridge installation.
- 4.8 Any of the above listed shingles may be produced in AR (algae resistant) versions.

#### 5. LIMITATIONS:

- This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use within FBC HVHZ jurisdictions.
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory for fire ratings of this product.
- 5.4 Wind Classification:
- 5.4.1 All shingles noted herein are Classified in accordance with **FBC Tables 1507.2.7.1** and **R905.2.6.1** to **ASTM D3161, Class F** and/or **ASTM D7158, Class H**, indicating the shingles are acceptable for us in all wind zones up to  $V_{asd} = 150$  mph ( $V_{ult} = 194$  mph). Refer to Section 6 for installation requirements to meet this wind rating.
- 5.4.2 Presidential Accessory, Accessory for Hatteras, Shangle Ridge, Shadow Ridge, Cedar Crest, NorthGate Ridge and NorthGate Accessory hip & ridge shingles have been evaluated in accordance with ASTM D3161, Class F. All except NorthGate Ridge and NorthGate Accessory require use of BASF Sonolastic NP 1 adhesive or Henkel PL® Polyurethane Roof & Flashing Sealant, applied as specified in manufacturer's application instructions, for use in wind zones up to V<sub>asd</sub> = 150 mph (V<sub>ult</sub> = 194 mph).
- 5.4.3 Classification by **ASTM D7158** applies to **exposure category B or C** and a **building height of 60 feet or less**. Calculations by a qualified design professional are required for conditions outside these limitations. Contact the shingle manufacturer for data specific to each shingle.
- 5.4.3.1 Analysis in accordance with ASTM D7158 indicates the measured uplift resistance (R<sub>T</sub>) for the CertainTeed asphalt Roof shingles listed in Section 4.1 through 4.6 (except Presidential Solaris™) exceeds the calculated uplift force (F<sub>T</sub>) at a maximum design wind speed of V<sub>asd</sub> = 150 mph (V<sub>ult</sub> = 194 mph) for residential buildings located in Exposure D conditions with no topographical variations (flat terrain) having a mean roof height less than or equal to 60 feet. The shingles are permissible under Code for installation in these conditions using the installation procedures detailed in this Evaluation Report and CertainTeed minimum requirements, subject to minimum codified fastening requirements established within any local jurisdiction, which shall take precedence.
- 5.5 All products in the roof assembly shall have quality assurance audits in accordance with **F.A.C. Rule 61G20-3**.



#### 6. INSTALLATION:

6.4


- 6.1 Roof deck, slope, underlayment and fasteners shall comply with **FBC 1507.2 / R905.2** and the shingle manufacturer's minimum requirements.
- 6.1.1 Underlayment shall be acceptable to **CertainTeed Corporation** and shall hold current Florida Statewide Product Approval, or be Locally Approved per **Rule 61G20-3**, per **FBC Sections 1507.2.3**, **1507.2.4 or R905.2.3**.
- 6.2 Installation of asphalt shingles shall comply with the **CertainTeed Corporation** current published instructions, using minimum four (4) nails per shingle in accordance with **FBC 1507.2.7** or **Section R905.2.6** and the minimum requirements herein.
- 6.2.1 Fasteners shall be in accordance with manufacturer's published requirements, but not less than FBC 1507.2.6 or R905.2.5. Staples are not permitted.
- 6.2.2 Where the roof slope exceeds 21 units vertical in 12 units horizontal, use the "Steep Slope" directions.
- 6.3 CertainTeed asphalt shingles are acceptable for use in reroof (tear-off) or recover applications, subject to the limitations set forth in **FBC Section 1511 or R908** and CertainTeed published installation instructions.

#### CT20™, XT™ 25, XT™ 30, XT™ 30 IR:

#### LOW AND STANDARD SLOPE **ENGLISH** 12" (305 mm) (305 mm) (305 mm) Sealant (25 mm) 1" (25 mm) 5 5/8" (145 mm) 5 1/2" for Norwood METRIC 131/8" --131/8" 131/8" (25 mm)Sealant 1" (25 mm) 6 1/8 4 Figure 11-3: Use four nails for every full shingle.

### STEEP SLOPE

Use **four** nails and six spots of asphalt roofing cement\* for every full shingle (*Figure 11-4*). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.



Apply 1" (25 mm) spots of asphalt roofing cement under each lab corner.

Figure 11-4: Use four nails and six spots of asphalt coment on steep slopes.

\*CAUTION: Excessive use of roofing cement can cause shingles
to blister.

#### 6.4.1 Hip & Ridge for CT20™, XT™ 25, XT™ 30, XT™ 30 IR: Cut Shingles




Figure 11-24: Cut tabs, then trim back to make cap shingles (English dimensions shown).

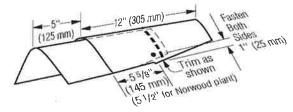


Figure 11-25: Installation of caps along the bips and ridges.

6.4.1.1 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.



#### 6.5 ARCADIA™:

#### LOW AND STANDARD SLOPE

Use SIX nails for every full shingle located as shown below.

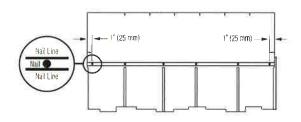


Figure 2: Use six mails for every full shingle.

#### STEEP SLOPE

Use SIX nails and FOUR spots of asphalt roofing cement for every full shingle as shown below. Apply asphalt roofing cement 1"(25 mm) from edge of shingle, Asphalt roofing cement meeting ASTM D 4586 Type II is suggested.






Figure 3: Use six nails and four spots of asphalt roofing cement on steep slopes.

#### 6.5.1 Hip & Ridge for Arcadia™: Cedar Crest™, Cedar Crest™ IR

Use two (2), minimum 1¾-inch long fasteners per shingle. For the starter shingle, place fastener 1-inch from each side edge and about 2-inch up from the starter shingle's exposed butt edge, ensuring minimum ¾-inch embedment into the deck, or full penetration through the deck. For each full Cedar Crest shingle, place fasteners 8-5/8-inch up from its exposed butt edge and 1-inch from each side edge.

For **ASTM D3161**, **Class F** performance use BASF "**Sonolastic® NP1**<sup>TM</sup>" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements, to **hand-seal Cedar Crest shingles**. Apply NP 1 or PL adhesive from the middle of the shingle's raised overlay on the top piece and extending approximately 4-inch along the sides of the headlap along a line ¾ to 1-inch from each side of the shingle's headlap. Immediately align and apply the overlying shingle, gently pressing tab sides into the adhesive, and install nails. To secure the other side, apply a 1-inch diameter spot of NP 1 or PL adhesive between the shingle layers.

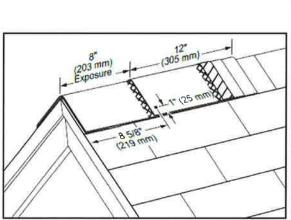

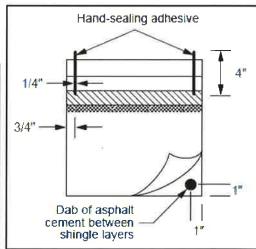




#### 6.6 BELMONT® OR BELMONT® IR:


Low and Standard Slope (2:12 to 21:12):

Use FIVE nails for every full Belmont shingle, located as shown below.

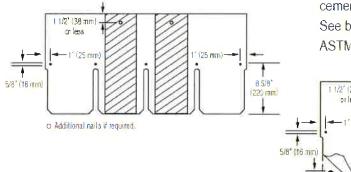

#### Steep Slope (greater than 21:12):

Use SEVEN nails and EIGHT spots of asphalt roofing cement\*\* for every full Belmont shingle, Apply asphalt roofing cement 1" (25mm) from edge of shingle. See below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

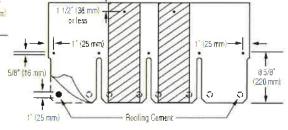

#### 6.6.1 Hip & Ridge for Belmont® or Belmont® IR:

6.6.1.1 Option 1: For Belmont®, refer to instructions herein for Cedar Crest™ or Cedar Crest™ IR hip and ridge shingles. For Belmont® IR, refer to instructions herein for Cedar Crest™ IR hip and ridge shingles.

#### 6.6.1.2 Option 2: For Belmont®: Shangle® Ridge

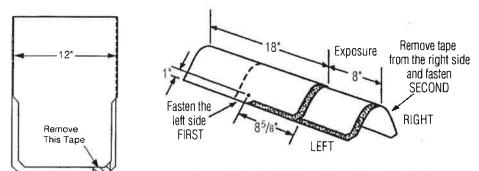


Figure 17-18: Shangle\* Ridge.

Figure 17-19: Installation of Shangle® Ridge shingles on hips and ridges.

6.6.1.3 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.



#### 6.7 CARRIAGE HOUSE SHANGLE® AND GRAND MANOR SHANGLE®:

### LOW AND STANDARD SLOPE

Use five nails for every full Shangle.

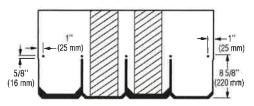


Figure 17-4: Use five nails for every full Grand Manor Sbangle. Carriage House Sbangle, or Centennial Slate.

#### STEEP SLOPE

Use seven nails and three spots of asphalt roofing cement for every full Grand Manor Shangle. Use five nails and three spots of asphalt roofing cement for every full Carriage House Shangle and Centennial Slate. Apply asphalt roofing cement 1° (25 mm) from edge of shingle (Figure 17-5). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.





Figure 17-5: When installing Grand Manor Shangles on steep slopes, use seven nails and three spots of asphalt roofing cement.

- 6.7.1 <u>Hip & Ridge for Carriage House Shangle® and Grand Manor Shangle</u>: Refer to instructions herein for Shangle® Ridge hip and ridge shingles
- 6.8 LANDMARK™, LANDMARK™ IR, LANDMARK™ PRO, LANDMARK™ PREMIUM, LANDMARK™ TL, LANDMARK™ SOLARIS, LANDMARK™ SOLARIS IR, NORTHGATE:

LOW AND STANDARD SLOPE

#### LANDMARK TL

#### **METRIC DIMENSIONS**

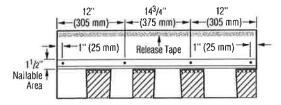


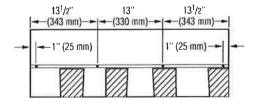


Figure 13-4: Use four nails for every full sbingle.

#### NorthGate:




Nailing areas for low and standard alopes (from 2:12 to 21:12)
Nail between upper & lower lines as shown above.

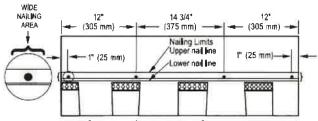

#### STEEP SLOPE

Use six nails and four spots of asphalt roofing cement for every full laminated shingle. See below. Asphalt roofing cement should meet ASTM D4586 Type II. Apply 1" spots of asphalt roofing cement unde each corner and at about 12" to 13" in from each edge.

#### METRIC DIMENSIONS

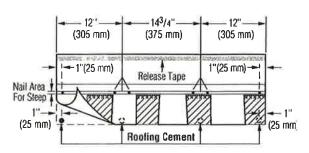

#### LANDMARK TL


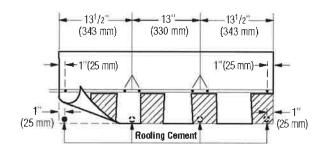


Figure 13-5: Use six nails and four spots of asphalt roofing cement on steep slopes.

#### NorthGate:

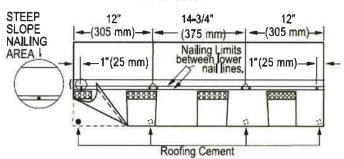



Nailing areas for steep slopes (greater than 21:12) and "Storm-Nailing"

Nail between lower 2 nail lines as shown above.

### 6.8.1 <u>Hip & Ridge for Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris, Landmark™ Solaris IR, NorthGate</u>:

#### 6.8.1.1 Option 1: Shadow Ridge™ or NothGate Accessory







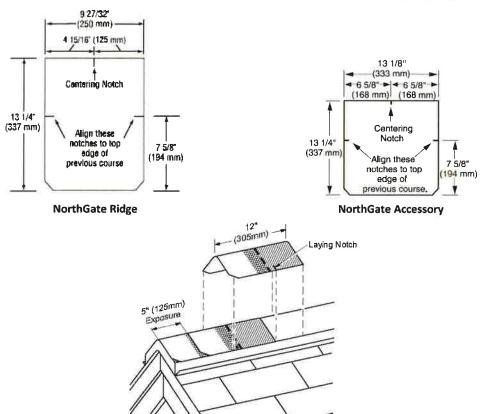


Figure 13-20: Use laying notches to center shingles on hips and ridges, and to locate the correct exposure.

- 6.8.1.2 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.
- 6.8.1.3 Option 2: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.



#### 6.9 PRESIDENTIAL SHAKE™, PRESIDENTIAL SHAKE™ IR, PRESIDENTIAL SHAKE TL™, PRESIDENTIAL SOLARIS™:

#### **LOW AND STANDARD SLOPE:**

For low and standard slopes, use five nails for each full Presidential shingle as shown below.

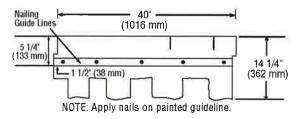


Figure 16-6: Fastening Presidential and Presidential TL Shake shingles on low and standard slopes.

#### STEEP SLOPE:

For steep slopes, use nine nails for each full Presidential shingle and apply 1" diameter spots of asphalt roofing cement under each shingle tab. After applying 5 nails in between the nailing guide lines, apply 4 nails 1" above tab cutouts making certain tabs of overlying shingle cover nails.




Figure 16-7: Fastening Presidential and Presidential T/L Sbake shingles on steep slopes.

### 6.9.1 <u>Hip & Ridge for Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™, Presidential Solaris™:</u>

#### 6.9.1.1 Option 1: Presidential Accessory

#### PRESIDENTIAL ACCESSORY

Presidential accessory shingles can be used for covering hips and ridges. Apply shingles up to the ridge (expose no more than 7" from the bottom edge of the "tooth." Fasten each accessory with two fasteners. The fasteners must be  $1^{3}/4$ " long or longer, so they penetrate either  $^{3}/\!4$ " into the deck or completely through the deck. Presidential accessory comes in two different sizes: Accessory produced in Birmingham, AL is 12" x 12"; Portland, OR produces  $9^{7}/\!8$ " x  $13^{1}/\!4$ " accessory.

- 6.9.1.2 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.
- 6.9.1.3 Option 2: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.

#### 6.10 HATTERAS™:

#### LOW, STANDARD AND STEEP SLOPE:




Figure 15-3: Fastening Hatteras Sbingles on Low and Standard Slopes

For low and standard slopes, use five nails for each full Hatterns shingle as shown above.




Figure 15-1: Fastening Hatteras Shingles on Steep Slopes

For steep slopes, use five nails and eight spots of asphalt roofing cement for each full Hatteras shingle as shown above. Apply I' (25mm) diameter spots of roofing cement (ASTM D 4586 Type II suggested) under each tab corner. Press shingle into place; do not expose cement.

CAUTION: Too much roofing cement can cause shingles to blister.



#### 6.10.1 Hip & Ridge for Hatteras™:

#### 6.10.1.1 Option 1: Accessory for Hatteras


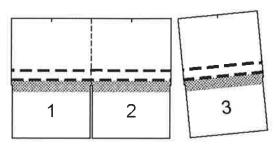


Figure 15-14: 18 three-piece units separate to make 54 Hatteras Accessory shingles.

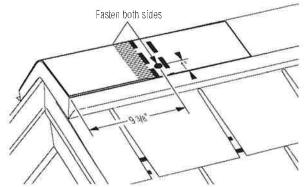

#### 6.10.1.2 Option 2: Cut Hatteras Shingles

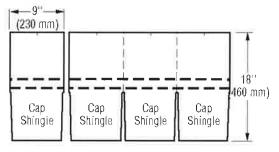


Figure 15-20: Cut Hatteras shingles to make cover cap.

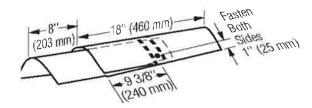


Figure 15-21: Installation of caps along hips and ridges.

6.10.1.3 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane**Roof & Flashing Sealant", in accordance with CertainTeed requirements.

#### 6.11 HIGHLAND SLATE™, HIGHLAND SLATE™ IR:

#### **LOW AND STANDARD SLOPE:**




Figure 11-3: Use FIVE nails for every Highland State shingle

#### STEEP SLOPE:

Use FIVE nails and EIGHT spots of asphalt roofing cement\* for each full Highland Slate shingle. For Miami-Dade, SIX nails are required. Apply 1\* diameter spots of asphalt roofing cement under each tab corner. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

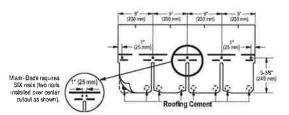


Figure 11-3A: Use FIVE nails and eight spots of asphalt roofing cement under each tab corner.

\*CAUTION: Excessive use of roofing cement can cause shingles to blister.


6.11.1 <u>Hip & Ridge for Highland Slate™, Highland Slate™ IR</u>: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR or Shangle Ridge™ hip and ridge shingles.



#### 6.12 PATRIOT™:

#### LOW AND STANDARD SLOPE


Use FOUR nails for every full shingle located as shown below.



#### STEEP SLOPE

Use FOUR nails and four spots of asphalt roofing cement for every full shingle as shown below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested. Apply 1\*(25 mm) spots of asphalt roofing cement as shown.

CAUTION: Excessive use of roofing cement can cause shingles to blister.



6.12.1 <u>Hip & Ridge for Patriot™</u>: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR, Shadow Ridge™, NorthGate or Shangle Ridge™ hip and ridge shingles.

#### 7. LABELING:

- 7.1 Each unit shall bear a permanent label with the manufacturer's name, logo, city, state and logo of the Accredited Quality Assurance Agency noted herein.
- 7.2 Asphalt shingle wrappers shall indicate compliance with one of the required classifications detailed in **FBC Table 1507.2.7.1 / R905.2.6.1**.

#### 8. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

#### 9. MANUFACTURING PLANTS:

Contact the named QA entity for information on which plants produce products covered by **Florida Rule 61G20-3** QA requirements.

#### 10. QUALITY ASSURANCE ENTITY:

UL LLC - QUA9625; (414) 248-6409; karen.buchmann@us.ul.com

- END OF EVALUATION REPORT -









Product Approval Menu > Product or Application Search > Application List > Application Detail

Submit Surcharge

DOFFICE OF THE

FL # FL21841-R2
Application Type Revision
Code Version 2017
Application Status Approved

User Registration

Comments Archived

Product Manufacturer CertainTeed Corporation-Roofing
Address/Phone/Email 20 Moores Road

ress/Phone/Email 20 Moores Road Malvern, PA 19355 (610) 893-5400

mark.d.harner@saint-gobain.com

Authorized Signature Mark Harner

mark.d.harner@saint-gobain.com

Technical Representative Mark D. Harner
Address/Phone/Email 18 Moores Road
Malvern, PA 193'

Maivern, PA 19355 (610) 651-5847

Mark.D.Harner@saint-gobain.com

Quality Assurance Representative

Address/Phone/Email

Category
Subcategory

Roofing Underlayments

Compliance Method

Evaluation Report from a Florida Registered Architect or a Licensed

Florida Professional Engineer

Evaluation Report - Hardcopy Received

Florida Engineer or Architect Name who developed

the Evaluation Report

Florida License

Quality Assurance Entity
Quality Assurance Contract Expiration Date

Validated By

Robert Nieminen

PE-59166 QAI Laboratories

01/01/2023

John W. Knezevich, PE

✓ Validation Checklist - Hardcopy Received

Certificate of Independence FL21841 R2 COI 2017 01 COI Nieminen.pdf

Referenced Standard and Year (of Standard)

 Standard
 Year

 ASTM D1970 (tear)
 2015

 ASTM D226 (physicals)
 2009

Equivalence of Product Standards Certified By

Sections from the Code

Method 1 Option D
09/06/2017
09/12/2017
09/15/2017
12/12/2017
03/19/2018

#### **Summary of Products**

FL # Model, Number or Name  21841.1 RoofRunner High Performance Synthetic Underlayment		Description  Synthetic underlayment for use with asphalt-shingle roof systems	



Contact Us:: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. Copyright 2007-2013 State of Florida. :: Privacy Statement :: Accessibility Statement :: Refund Statement

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail, If you have any questions, please contact 850.487.1395. \*Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click here.





#### **EXTERIOR RESEARCH & DESIGN, LLC.**

Certificate of Authorization #9503 353 CHRISTIAN STREET, UNIT #13 OXFORD, CT 06478 (203) 262-9245

#### **EVALUATION REPORT**

CertainTeed Corporation 20 Moores Road Malvern, PA 19355 (610) 651-5847 Evaluation Report 13500.02.17-R2

FL21841-R2

Date of Issuance: 02/10/2017

Revision 2: 09/05/2017

#### SCOPE:

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the **6**<sup>th</sup> **Edition (2017) Florida Building Code** sections noted herein.

#### **DESCRIPTION: RoofRunner™ High Performance Synthetic Roofing Underlayment**

LABELING: Labeling shall be in accordance with the requirements the Accredited Quality Assurance Agency noted herein.

**CONTINUED COMPLIANCE:** This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. if the product changes or the referenced Quality Assurance documentation changes. Trinity ERD requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

**ADVERTISEMENT:** The Evaluation Report number preceded by the words "Trinity|ERD Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

**INSPECTION:** Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 3.

Prepared by:

Robert J.M. Nieminen, P.E.

Florida Registration No. 59166, Florida DCA ANE1983

OF NO. SPICE OF NO. SPATE OF NO

The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 09/05/2017. This does not serve as an electronically signed document.

#### **CERTIFICATION OF INDEPENDENCE:**

- 1. Trinity|ERD does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
- 2. Trinity | ERD is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
- 3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
- 4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
- 5. This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.



#### **ROOFING COMPONENT EVALUATION:**

#### 1. SCOPE:

**Product Category:** 

Roofing

Sub-Category:

Underlayment

**Compliance Statement:** RoofRunner™ High Performance Synthetic Roofing Underlayment, as produced by CertainTeed Corporation, has demonstrated compliance with the following sections of the 6<sup>th</sup> Edition (2017) Florida Building Code through testing in accordance with applicable sections of the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

#### 2. STANDARDS:

Section	<u>Properties</u>	Standard	<u>Year</u>
1507.2.3 / 1507.1.1	Unrolling, Breaking Strength, Pliability	ASTM D226	2009
1507.1.1	Tear strength	ASTM D1970	2015

#### 3. REFERENCES:

<b>Entity</b>	<u>Examination</u>	Reference	<u>Date</u>
ERD (TST6049)	Tear strength	CTR-SC16080.17	07/31/2017
QAI (TST9808)	Physical Properties, AC188	RJ3502P-1	11/05/2014
QAI (QUA7628)	Traceability/Inspections	Service Confirmation	02/09/2017

#### 4. PRODUCT DESCRIPTION:

4.1 RoofRunner™ is a synthetic polymer-based scrim-reinforced underlayment designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles; meets ASTM D226 physical property requirements and ASTM D1970 tear strength per the Exception of FBC 1507.1.1. RoofRunner™ consists of a woven polyolefin base with a layer of nonwoven polyolefin sheet and a polymer coating on the back side. RoofRunner™ is available in rolls 48-inch x 250-ft; nominal unit weight of 2.25 lbs/square.

#### 5. LIMITATIONS:

- This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in FBC HVHZ jurisdictions.
- Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory or test report from accredited testing/listing agency for fire ratings of this product.
- 5.4 **RoofRunner™** may be used with any prepared roof cover where the product is specifically referenced within FBC approval documents. If not listed, a request may be made to the Authority Having Jurisdiction for approval based on this evaluation combined with supporting data for the prepared roof covering.
- 5.5 **RoofRunner™** shall not be installed on roof slopes below 2:12.

#### 5.6 Allowable roof covers:

TABLE 1: ROOF COVER OPTIONS							
Underlayment	Asphalt Shingles	Nail-On Tile	Foam-On Tile	Metal	Wood Shakes & Shingles	Slate	
RoofRunner™	Yes	No	No	No	No	No	

#### 5.7 Exposure Limitations:

CertainTeed recommends primary roofing be installed within 48 hours of underlayment installation for reroof applications or within 10-days of underlayment installation for new construction applications.



#### 6. INSTALLATION:

- 6.1 RoofRunner™ High Performance Synthetic Roofing Underlayment shall be installed in accordance with CertainTeed Corporation published installation instructions subject to the Limitations set forth in Section 5 herein and the specifics noted below.
- 6.2 Install in compliance with the requirements for ASTM D226 underlayment in **FBC 1507.1.1**, taking into account the wider sheet-width of **RoofRunner™** for double-layer applications.
- Re-fasten any loose decking panels, and check for protruding nail heads. Sweep the substrate thoroughly to remove any dust and debris prior to application.
- 6.4 Corrosion resistant fasteners shall be plastic cap nails with minimum 1-inch diameter head. **Do not use staples.** Ensure fasteners are installed at 90 degree angle to the deck with flush contact between the plastic cap or metal cap and the upper surface of the underlayment. Fasteners shall be of sufficient length to penetrate through the underside of plywood or OSB decks, or minimum ¾-inch embedment into dimensional lumber / tongue-and-grove wood decks.
- 6.5 Install a leak barrier of ASTM D1970, such as **CertainTeed WinterGuard (FL11288)**, or equal holding Florida Statewide Product Approval at vulnerable leak areas, including but not limited to eaves, valleys, rakes, skylights and dormers. At eaves and valleys, install the leak barrier prior to installation of **RoofRunner™**. Along the rake, install **RoofRunner™** leaving 6 to 8-inch of the deck exposed, and then install the leak barrier over the **RoofRunner™** and exposed decking. At other areas, install the leak barrier over the **RoofRunner™**.
- 6.6 Single Layer; Roof Slope > 4:12:

Starting at the eave, lay printed-side up and fasten at the circular targets printed on the top surface; 15-inch o.c. vertically and 12-inch o.c. horizontally (parallel to eaves). On vertical side/end laps install 8 fasteners equally spaced at 6-inch o.c. centered in the lap to hold the underlayment in place. Continue upslope in a similar manner, maintaining minimum 3-inch wide horizontal and minimum 6-inch wide vertical laps, and fasten as noted above. Offset vertical end laps from course to course at least 3 feet.

6.7 <u>Double Layer; 2:12 < Roof Slope < 4:12:</u>

Starting at the eave, lay a 25.5-inch wide starter strip, printed-side up and fastened to hold in place. Then install a full 48-inch wide sheet, printed-side up, over the starter strip and fasten at the circular targets printed on the top surface; 15-inch o.c. vertically and 12-inch o.c. horizontally (parallel to eaves). On vertical side/end laps install 8 fasteners equally spaced at 6-inch o.c. centered in the lap to hold the underlayment in place. Continue upslope in a similar manner, maintaining minimum 25.5-inch wide horizontal laps (resulting in maximum 22.5-inch exposure) and minimum 12-inch wide vertical laps, and fasten as noted above. Offset vertical end laps from course to course at least 3 feet.

6.8 **RoofRunner™** may not be used in any exposed application, including but not limited to crickets, exposed valleys or exposed roof to wall details.

#### 7. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

#### 8. MANUFACTURING PLANTS:


Dadra, India

#### 9. QUALITY ASSURANCE ENTITY:

Quality Auditing Institute, Ltd. – QUA7628; (604) 527-8378, mlansdowne@gai.org

- END OF EVALUATION REPORT -



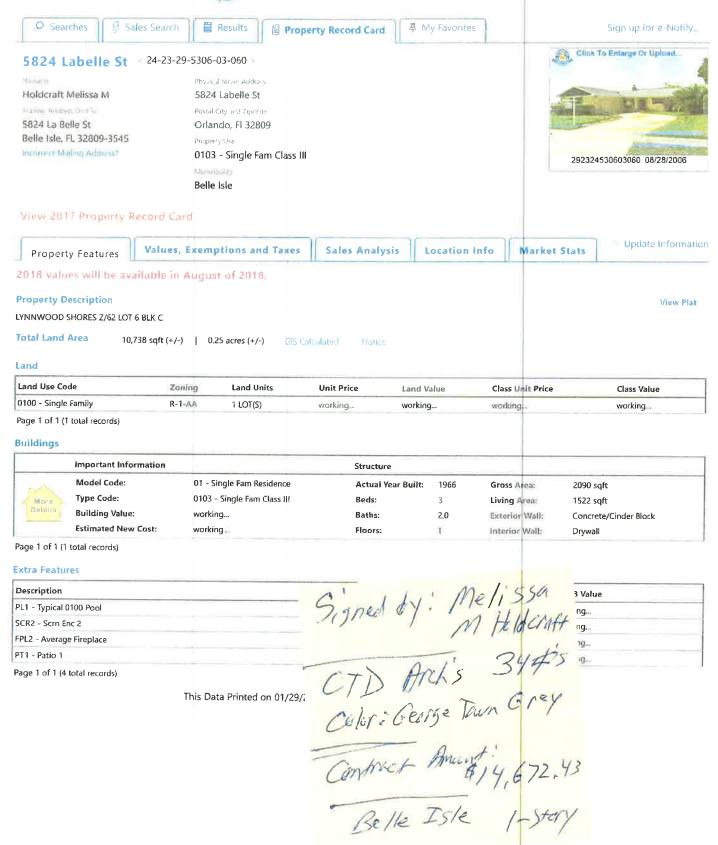



## STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

CONSTRUCTION INDUSTRY LICENSING BOARD 2601 BLAIR STONE ROAD TALLAHASSEE FL 32399-0783

(850) 487-1395

HEWITT, JEFFREY ALLAN GOLD KEY ROOFING LLC 6021 SOUTH ORANGE AVENUE ORLANDO FL 32809

Congratulations! With this license you become one of the nearly one million Floridians licensed by the Department of Business and Professional Regulation. Our professionals and businesses range from architects to yacht brokers, from boxers to barbeque restaurants, and they keep Florida's economy strong.

Every day we work to improve the way we do business in order to serve you better. For information about our services, please log onto www.myfforidalicense.com. There you can find more information about our divisions and the regulations that impact you, subscribe to department newsletters and learn more about the Department's initiatives.

Our mission at the Department is: License Efficiently, Regulate Fairly. We constantly strive to serve you better so that you can serve your customers. Thank you for doing business in Florida, and congratulations on your new license!



STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

CCC1329157

ISSUED: 08/16/2016

CERTIFIED ROOFING CONTRACTOR HEWITT, JEFFREY ALLAN GOLD KEY ROOFING LLC

IS CERTIFIED under the provisions of Ch.489 FS.
Expiration date AUG 31, 2018 L1608160002255

DETACH HERE

RICK SCOTT, GOVERNOR

KEN LAWSON, SECRETARY

#### STATE OF FLORIDA

DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION CONSTRUCTION INDUSTRY LICENSING BOARD

LICENSE NUMBER

CCC1329157

The ROOFING CONTRACTOR Named below IS CERTIFIED Under the provisions of Chapter 489 FS. Expiration date: AUG 31, 2018

> HEWITT, JEFFREY ALLAN GOLD KEY ROOFING LLC 6021 SOUTH ORANGE AVENUE ORLANDO FL 32809





ISSUED: 08/16/2016

DISPLAY AS REQUIRED BY LAW

SEQ# L1608160002259

Harry W. Hewitt (407)851-0680

#### CITY OF EDGEWOOD LOCAL BUSINESS TAX RECEIPT

405 LARUE AVENUE, EDGEWOOD FL 32809-3406 LICENSE YEAR: OCT 1, 2017 - SEPT 30, 2018

MUST BE POSTED CONSPICUOUSLY AT PLACE OF BUSINESS

Address:

4874 S. Orange Avenue

EDGEWOOD FL 32806

Activity:

ROOFING AND CONSTRUCTION

Issued to:

Gold Key Roofing

Harry W. Hewitt

4874 S. Orange Avenue

Α

EDGEWOOD FL 32806



98.12 **BUS TAX** PENALTY

No:

1872

8/14/17

TRANSFER

98.12 **Total Paid** October 1 0.00 November 1 0.00 December 1 0.00 0.00 January 1

Bea L. Meeks, CBTO, City Clerk



#### CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 12/13/2017

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER. IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If \$UBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s). CONTACT Debra Guidry, CPCU PRODUCER PHONE (A/C, No. Ext): (800) 767-3772 E-MAIL ADDRESS: debra@frsasif.com FAX (AIC, No): (407) 671-2520 FRSA Self Insurers Fund, Inc. 4099 Metric Drive Winter Park, FL 32792 INSURER(S) AFFORDING COVERAGE 35378 FRSA Self Insurers Fund / Evanston Insurance Co. INSURER A: INSURED INSURER B: Gold Key Roofing, LLC INSURER C 4874 S. Orange Avenue INSURER D: Orlando, FL 32806 INSURER E : INSURER F: REVISION NUMBER: COVERAGES CERTIFICATE NUMBER: THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS. ADDL SUBR LIMITS TYPE OF INSURANCE POLICY NUMBER INSD WVD COMMERCIAL GENERAL LIABILITY EACH OCCURRENCE DAMAGE TO RENTED \$ CLAIMS-MADE PREMISES (Ea occurrence) MED EXP (Any one person) S N/A PERSONAL & ADV INJURY S S GENERAL AGGREGATE GEN'L AGGREGATE LIMIT APPLIES PER: \$ PRODUCTS - COMP/OP AGG POLICY PRO-JECT OTHER: MBINED SINGLE LIMIT S (Ea accident) AUTOMOBILE LIABILITY BODILY INJURY (Per person) ANY AUTO ALL OWNED AUTOS SCHEDULED AUTOS NON-OWNED AUTOS BODILY INJURY (Per accident) N/A PROPERTY DAMAGE (Per accident) HIRED AUTOS UMBRELLA LIAB EACH OCCURRENCE 5 OCCUR EXCESS LIAB N/A AGGREGATE CLAIMS-MADE RETENTION S WORKERS COMPENSATION X PER STATUTE AND EMPLOYERS' LIABILITY 1,000,000 EL EACH ACCIDENT ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? 01/01/2018 01/01/2019 N NIA N 870-040079 / 3DY3150 1,000,000 E.L. DISEASE - EA EMPLOYEE (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below 1,000,000 E.L. DISEASE - POLICY LIMIT DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required REMARKS: Non-cancelable, without 30 days prior written notice, except for non-payment of premium which will be a 10 day written notice. Jeffrey Allan Hewitt, Qualifier Lic #CCC1329157 CERTIFICATE HOLDER CANCELLATION Attn: SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. City of Belle Isle 1600 Nela Ave. AUTHORIZED REPRESENTATIVE Belle Isle, FL 32809 Debra Guidry CPCU Underwriting Manager



#### CERTIFICATE OF LIABILITY INSURANCE

2/15/2018

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(les) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

certificate holder in lieu of such endorsement(s).		The second secon		
PRODUCER	CONTACT Griselidys Acost	a		
Frank H. Furman, Inc.	PHONE (A/C, No, Ext): (954) 943-5050 FAX (A/C, No): (954) 942-5310			
1314 East Atlantic Blvd.	E-MAIL ADDRESS: gris@furmaninsurance.com			
P. O. Box 1927	\$10000 \$100.			
Pompano Beach FL 33061	INSURER(S) AFFOR			
INSURED	INSURER A Security National Insurance Company 33120			
	INSURER B MAPFRE	1		
Gold Key Roofing, LLC Gold Key International Inc	INSURER C:			
4874 S. Orange Avenue	INSURER D :			
	INSURER E :			
Orlando FL 32806	INSURER F:			
COVERAGES . CERTIFICATE NUMBER:18/19 MAS		REVISION NUMBER:		
THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAY INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDE EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE INST	OF ANY CONTRACT OR OTHER DE ED BY THE POLICIES DESCRIBED	OCUMENT WITH RESPECT TO WHICH THIS		
LTR TYPE OF INSURANCE INSO WYD POLICY NUMBER	(IMMIDDIYYYY) (MMIDDIYYYY)	LIMITS		
X COMMERCIAL GENERAL LIABILITY		EACH OCCURRENCE \$ 1,000,000		
A CLAIMS-MADE X OCCUR		PREMISES (Ea occurrence) S 100,000		
SES154145300	2/19/2018 2/19/2019	MED EXP (Any one person) \$ 5,000		
		PERSONAL & ADV INJURY \$ 1,000,000		
GEN'L AGGREGATE LIMIT APPLIES PER:		GENERAL AGGREGATE 5 2,000,000		
POLICY X PRO- LOC	1.6	PRODUCTS - COMP/OP AGG \$ 2,000,000		
OTHER:		Employee Benefits Limbility S 1,000,000		
AUTOMOBILE LIABILITY		COMBINED SINGLE LIMIT & 1 000 000		
X ANY AUTO	9	(Es accident) S 1,000,000 BODILY INJURY (Per person) S		
ALL OWNED SCHEDULED		BODILY INJURY (Per accident) \$		
AUTOS 5204070002276	2/19/2018 2/19/2019	PROPERTY PALLACE		
X HIRED AUTOS X AUTOS		(Per accident)		
		PIP-Basic S 10,000		
UMBRELLA LIAB OCCUR		EACH OCCURRENCE S		
EXCESS LIAB CLAIMS-MADE		AGGREGATE 8		
DED RETENTIONS ·		\$		
WORKERS COMPENSATION AND EMPLOYERS' LIABILITY		PER OTH- STATUTE ER		
ANY PROPRIETOR/PARTNER/EXECUTIVE		E.L. EACH ACCIDENT \$		
OFFICER/MEMBER EXCLUDED? (Mandatory in NH)		EL DISEASE - EA EMPLOYEE S		
If yes, describe under DESCRIPTION OF OPERATIONS below		E.L. DISEASE - POLICY LIMIT S		
		<u> </u>		
DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedu	le, may be attached if more space is moule	ed)		
*	ne, may be attached it more space to require			
CERTIFICATE HOLDER	CANCELLATION	*		
City of Belle Isle 1600 Nela Ave	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.			
Orlando, FL 32809				
	AUTHORIZED REPRESENTATIVE			
	Dirk DeJong/GA	Died D. Doff		

© 1988-2014 ACORD CORPORATION. All rights reserved.