

BUILDING JOB SITE CARD

City of Belle Isle

ROOFING PERMIT 2017-08-112

PERMIT MUST BE POSTED ON SITE

Permit Number: 2017-08-112

Site Address: 1815 Colleen Dr., 32809

Subdivision:

Description of Work: ReRoof 4000 sf asphalt shingles

Issue Date: 8/21/17

Parcel Number: 30-23-30-0610-00-230

Class: Residential

Issued To: Janney Construction Services

Name: Janney, John C

Payment Date & Method: 8-22-17 Amx 91072 4114.

Business Phone: 407 832 3403 Contractor License #: CCC1329428

Schedule Inspections via Email at: <u>BIDscheduling@universalengineering.com</u>
SCHEDULE INSPECTIONS BY 4PM CUT OFF TIME
Inspection Results Will Be Sent Out the Next Business Day

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

BUILDING	INSPECTOR	DATE	COMMENTS
Demo Final			
Footing			
Stem Wall			
Slab			
Lintel/Tie Beam			
Down Pour			
Tilt Panel			
Window In-progress			
Sheathing (wall)			
Sheathing (roof)			
Framing			
Fire Rated Assembly			
Above-Ceiling			
Insulation			
Lathe			
Pool Steel & Ground			
Pool Safety			
Final			

PERMIT # 2017-08-112

GAS	INSPECTOR	DATE	COMMENTS
Rough Gas			
Final Gas			
			- 1
ELECTRICAL	INSPECTOR	DATE	COMMENTS
Temp Pole			
TUG			
Underground			
Rough			
Footer Steel Bonding			
Pool Light			
PrePower		4	8
Meter ReSet			
Final			
***************************************	\$:		
MECHANICAL	INSPECTOR	DATE	COMMENTS
Above Ceiling			
Rough			
Hood Vent			
Final			T T
			"
PLUMBING	INSPECTOR	DATE	COMMENTS
Sewer			
Underground			
Rough			
Above Ceiling			
Irrigation			
Final			
ROOF	INSPECTOR	DATE	COMMENTS
In-progress			
Final			

Inspection requests are to be emailed to BIDScheduling@UniversalEngineering.com; a confirmation email will be sent back to you upon scheduling. Next-Day Inspection requests must be made by 4pm. Please include the following in your request: Permit #, project address, type of inspection, date of the requested inspection, a contact name & a contact phone number. AM or PM may be requested but cannot be guaranteed.



City of Belle Isle
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32311 AUG
Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

APPLICATION FOR ROOFING PERMIT

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

		~	711
DATE OF APPLICATION:		ERMIT NUMBER licated below:	1100 011
Project Address 1915 College C			32812
		•	,
Property Owner <u>JUNN BOCCHIC</u>	nio		in Role o Tila
Property Owner's Mailing Address	olleen Dr	_city(UVIOUXO	60 2510 T 216
State FC Zip Code 37509 Pa	rcel (d Numbe): 36-23-3 QUIRED! To obtain this information, please vi	slt http://www.ocpafl.org/Sear	Ches/ParcelSearch.aspx
Class of Building: Old New Type of Type of Work: New Roof ReRoof	f Building: Residential Comme	rcial Other 🗀	
REQUIREDI Fiorida Product Approval Form - NO1	TE: installation instructions must be po	sted on-site before your firs	t inspection!!
Please indicate the nature of work by completing the inform	nation below:	15= 121	Oce
Roof Square Footage: 40	Number of Stories:	Job Valuation: \$	000
Type: Asphalt Shingles Metal I hereby certify that the above is true and correct to the bes	Modified Bitumen ☐ Other:_		
of this permit does not grant permission to violate any appli Republic Services is by legal contract the sole authorized p collection and disposal services with the city limits of the Ci 407-293-8000 to setup accounts for Commercial, Constructual or from Republic Services. The City enforces the contact of the City enforces th	provider of garbage, recycling, yard waste, ity. Contractors, homeowners and comme tion Roll Off, or other services needed. Represent through its code enforcement office.	and commercial gardage and rcial businesses may contact l ates are fixed by contract and	Republic Services at are available at City a stop work order.
LICENSE HOLDER NAME TUNK CTUNK	COMPANY NAM	E Jamey Con	struction Services
Street Address P. () - Box 570842		*·	
City State	FL Zip Code <u>32857</u>	_ Phone Number	107-832-3403
Email Address brecca@ janneyroof	ing-com	Zoning Fee	s_30.
		Building Fee	\$ 80c
SM	Date 8-21-17	Review Fee	\$
Building Official:	DateDate	1% BCAIB Fee	s(m)
La de la de la della del	n file Date 8-21-17	1.5% DCA Fee	s2 /ww
Verified Contractor's Licenses & Insurance are or		Total Permit Fee	\$
NOTE: The Bullding Permit Number is required if the has been issued.	Roof Installation is associated with any c	onstruction or alteration whe Building Permit Number	ere a Building Permit
(1)× 5		MEX 91072	8. 32.17

Permit Number:	
Folio/Parcel ID #:	DOC# 20170443783 08/10/2017 02:07:26 PM Page 1 of 1
Prepared by: Central Florida Commercial	Rec Fee: \$10.00
SPALICEC	Phil Diamond, Comptroller
2011002	Orange County, FL MB - Ret To: JOHN C JANNEY
Return to: 315 W Grant St	
Orlando FL 32806	
VIII (40, FE 32000	Mill Miller of Little of Paris, I produce the relation of properties and the
NOTICE OF COMMENCEMENT	
State of Florida, County of Orange	
The undersigned hereby gives notice that improvement will be ma	ade to certain real property, and in accordance
with Chapter 713, Florida Statutes, the following information is pro	ovided in this Notice of Commencement
1. Description of property (legal description of the property, and	
1815 COLLEEN DR BELLE ISLE.	FL 32809
2. General description of improvement	
re-100f	
3. Owner information or Lessee information if the Lessee co	ntracted for the improvement
Name JOHN BOCCHICC HIO	
Address 1815 COLLEEN DR BELLE ISL	E, FL 32809
Interest in Property DWNER	V
Name and address of fee simple titleholder (if different from	m Owner listed above)
Name	
Address	The first state of the first state of the st
4. Contractor	371-20= 7/1=
Name JOHN C Januar	Telephone Number_371-385-7663
Address P.O. box 570842 Ovignolo, FL 3	(% 5 ⁻)
5. Surety (if applicable, a copy of the payment bond is attached)	
Name	Telephone Number
Address	Amount of Bond \$
6. Lender	T. L. de co. Mondon
Name	i elepnone Number
Address	was when police as other decompate man
7. Persons within the State of Florida designated by Owner	upon wnom notices or other documents may
be served as provided by §713.13(1)(a)7, Florida Statutes	Telephone Number
Name	relabilione Marilbei
Address_ 8. In addition to himself or herself, Owner designates the fo	llowing to receive a copy of the Lienor's
Notice as provided in §713.13(1)(b), Fiorida Statutes.	mouning to receive a coby or the French a
Name	Telephone Number
Address	
Expiration date of notice of commencement (the expiration	n date will be 1 year from the date of recording
unless a different date is specified)	(§ (g
	- Connos
RNING TO OWNER: ANY PAYMENTS MADE BY THE OWNER AFTER THE EX	PIRATION OF THE NOTICE OF COMMENCEMENT
E CONSIDERED IMPROPER PAYMENTS UNDER CHAPTER 713, PART I, SECT BULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY.	NOTICE OF COMMENCEMENT MUST BE
CORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION.	IF YOU INTEND TO OBTAIN FINANCING, CONSULT
H YOUR DENDER OR AN ATTORNEY BEFORE COMMENCING WORK OR RE	CORDING YOUR NOTICE OF COMMENCEMENT.
(A MARCO Verolles	of tr
April vector	e e e
nature of pwner or Lessee, or Owner's or Lessee's Authorized Officer/Director/Part	TION 713.13, FLORIDA STATUTES, AND CAN A NOTICE OF COMMENCEMENT MUST BE IF YOU INTEND TO OBTAIN FINANCING, CONSULT CORDING YOUR NOTICE OF COMMENCEMENT. Signatory's Title/Office To de //1 by
	yof 4/17 by Tuhn Boanicchiod to 5
e foregoing instrument was acknowledged before me this 🤦 day	of 8/11 by John Boachicch of a barrier name of person
13 where for	F & S
Type of authority, e.g., officer, trustee, attorney in fact Name of	of e/i1 by name of person OH OH Public Set traum commissioned name of Notary Public Set traum commissioned name
Type of authority, e.g., officer, frustee, attorney in fact	E O ⊕
////	
-/ // //	g de g
Signature of Notary Bablic - State of Florida Pri	int, type, or stamp commissioned name of Notary Public 🦸 👼 🗟
Remarkly Know OR Bradward ID	
Personally Known OR Produced ID	
Type of ID Produced_(JONATHAN PEK JANNEY





CITY OF BELLE ISLE, FLORIDA
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811
Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

POWER OF ATTORNEY

Date: 8/16/17	Permit #:
I hereby name and appoint <u>EVECCU BECCULIV</u>	of
Tunney Construction Services	
me and apply to the City of Belle Isle Building Department for a	(type of permit) permit
for work to be performed at the following location:	,,,,,,
(street address)	, Belle Isle, FL 💢 32809 □ 32812 and
to sign my name and do all things necessary to this appointment.	
Certified Contractor's Printed Name:	Janney
License Number: <u>CCC いろとらい</u>	26
Certified Contractor's Signature:	Com
***************************************	***************************************
The foregoing instrument was acknowledged before me this	and the same of th
by John C Tanney who is	personally known to me or who produced
	tification and who did not take an oath.
State of Florida County of Orange Notary Public, Orange County, Florida	*
JONATHAN DEREK JANN MY COMMISSION & FF 134 EXPIRES: March 14, 20 Bonded Thru Notary Public Under	(seal) 1326 119 Franklers



City of Belle Isle

Universal Engineering Sciences 3532 Maggie Blvd., Orlando FL 328MU6 2 1 Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

1 * Fax 407-581-0313 * www.universalendineering.com

Product Approval Form

DATE: PROJECT ADDRESS 1815 Colleen DV	PERMIT #
As required by Florida Statue 553.842 and Florida Administrative Code 9B-72m, components listed below if they will be utilized on the building or structure. FL Approach the local product supplier. The following information must be turned in	ved products are listed online at www.floridabuilding.org or can be
NOTE: The Installation instructions must be posted on-site before your firs	st inspection!!

Product Type	<u>Manufacturer</u>	Model/Series	FL Product Approval #	Product Type	Manufacturer	Model/Series	FL Product Approval #
	EXTERIOR E	OOORS			WALL PAN	ELS	
Swinging				Sliding			
Sliding				Soffits			
Sectional/Rollup				Storefront			
Other				Glass Block			
	-			Other			
	WINDO	ws			ROOFING PRO		
Single/Dbl Hung				Asphalt Shingles	containted	tardners	5444.1
Horizontal Slider				Non Struct Metal			
Casement				Roofing Tiles			
Fixed				Single Ply Roof			
Mullion				Underlayment	12 h ino Roof	l	15216.1
Skylights				Other			
Other							
	STRUCTURAL CO	MPONENTS			OTHER		
Wood Connectors						450	
Wood Anchors							
Truss Plates							
Insulation Forms							4
Lintels				<u></u>			
Other							

It is the applicant's responsibility to verify that specific products have been installed in accordance with their limitations and with the minimum required design pressures for the structure. Specific compliance will be verified during field inspections.

Applicant Signature Muccon Bellenen Date 8/1









Product Approval Menu > Product or Application Search > Application List > Application Detail

FL15216-R2 Application Type Revision Code Version 2014 Application Status Approved

Comments Archived

Product Manufacturer InterWrap, Inc. Address/Phone/Email 32923 Mission Way Mission, NON-US 00000 (551) 574-2939

mtupas@interwrap.com

Authorized Signature Eduardo Lozano

elozano@interwrap.com

Technical Representative Eduardo Lozano Address/Phone/Email 32923 Mission Way Mission, NON-US 00000

(778) 945-2891 elozano@interwrap.com

Quality Assurance Representative Address/Phone/Email

Category Roofing Subcategory Underlayments

Compliance Method Evaluation Report from a Florida Registered Architect or a Licensed

Florida Professional Engineer

☐ Evaluation Report - Hardcopy Received

Florida Engineer or Architect Name who developed

the Evaluation Report

Florida License

Quality Assurance Entity

Robert Nieminen

PE-59166



EXTERIOR RESEARCH & DESIGN, LLC.

Certificate of Authorization #9503 353 CHRISTIAN STREET, UNIT #13 OXFORD, CT 06478

PHONE: (203) 262-9245 FAX: (203) 262-9243

EVALUATION REPORT

Interwrap, Inc. 32923 Mission Way Mission, BC V2V-6E4 Canada Evaluation Report I40510.02.12-R2

FL15216-R2
Date of Issuance: 02/17/2012

Revision 2: 04/27/2015

SCOPE:

This Evaluation Report is issued under Rule 61G20-3 and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the 5th Edition (2014) Florida Building Code sections noted herein.

DESCRIPTION: RhinoRoof Underlayments

LABELING: Labeling shall be in accordance with the requirements the Accredited Quality Assurance Agency noted herein.

CONTINUED COMPLIANCE: This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. if the product changes or the referenced Quality Assurance documentation changes. Trinity|ERD requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Evaluation Report number preceded by the words "Trinity|ERD Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 3.

Prepared by:

Robert J.M. Nieminen, P.E.

Florida Registration No. 59166, Florida DCA ANE1983

OENS ENO-SPIES STATE OF BUILDING

The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 04/27/2015. This does not serve as an electronically signed document. Signed, sealed hardcopies have been transmitted to the Product Approval Administrator and to the named client

CERTIFICATION OF INDEPENDENCE:

- Trinity|ERD does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
- Trinity | ERD is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
- 3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
- 4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
- 5. This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.



ROOFING COMPONENT EVALUATION:

1. SCOPE:

Product Category:

Roofing

Sub-Category:

Underlayment

Compliance Statement: RhinoRoof Underlayments, as produced by Interwrap, Inc., has demonstrated compliance with the intent of following sections of the Florida Building Code through testing in accordance with applicable sections of the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

2. STANDARDS:

Section	<u>Properties</u>	Standard	<u>Year</u>
1507.2.3, 1507.5.3, T1507.8, 1507.8.3, 1507.9.3	Unrolling, Breaking Strength, Pliability, Loss on Heating	ASTM D226	2006
1507.2.3, 1507.5.3, 1507.8.3, 1507.9.3	Unrolling, Tear Strength, Pliability, Loss on Heating, Liquid Water Transmission, Breaking Strength, Dimensional Stability	ASTM D4869	2005

3. REFERENCES:

Entity	<u>Examination</u>	<u>Reference</u>	<u>Date</u>
ITS (TST1509)	Physical Properties	100539395COQ-006	10/27/2011
ITS (TST1509)	Physical Properties	100539395COQ-002	10/27/2011
ITS (TST1509)	Physical Properties	100539395COQ-006	03/14/2014
ITS (QUA1673)	Quality Control	Inspection Report	11/17/2014

4. PRODUCT DESCRIPTION:

4.1 **RhinoRoof U20** is a multilayered polymer woven coated synthetic roof underlayment intended as an alternate to ASTM D226, Type I or Type II felt or D4869 Type II felt. RhinoRoof Underlayment is available in 42-inch wide rolls, and can be produced in various other sizes.

5. LIMITATIONS:

- 5.1 This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in the HVHZ.
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory or test report from accredited testing agency for fire ratings of this product.
- RhinoRoof Underlayments may be used with any prepared roof cover where the product is specifically referenced within FBC approval documents. If not listed, a request may be made to the AHJ for approval based on this evaluation combined with supporting data for the prepared roof covering.
- 5.5 Allowable roof covers applied atop RhinoRoof Underlayments are follows:

Table 1: Roof Cover Options						
Underlayment	Asphalt Shingles	Nail-On Tile	Foam-On Tile	Metal	Wood Shakes & Shingles	Slate or Simulated Slate
RhinoRoof U20	Yes	No	No	Yes	Yes	No

- 5.6 Exposure Limitations:
- 5.6.1 RhinoRoof Underlayment shall not be left exposed for longer than 30-days after installation.

6. INSTALLATION:

- 6.1 RhinoRoof Underlayments shall be installed in accordance with Interwrap, Inc. published installation instructions subject to the Limitations set forth in Section 5 herein and the specifics noted below.
- 6.2 Install RhinoRoof Underlayments in compliance with manufacturer's published installation instructions and the requirements for ASTM D226, Type I or II or D4869, Type II underlayments in FBC Sections 1507 for the type of prepared roof covering to be installed.



6.3 Re-fasten any loose decking panels, and check for protruding nail heads. Sweep the substrate thoroughly to remove any dust and debris prior to application.

6.4 RhinoRoof U20:

6.4.1 Fasteners:

For exposure ≤ 24 hours, corrosion resistant fasteners may be 1-inch roofing nails with a 3/8-inch diameter head, or those noted in 6.4.2. The use of staples is prohibited.

For exposure > 24 hours up to maximum 30 days, corrosion resistant fasteners shall be minimum 1-inch diameter plastic or metal cap nails or FBC HVHZ nails & 1-5/8" diameter tin caps (with the rough edge facing up). The use of staples is prohibited.

6.4.2 Single Layer; Roof Slope > 4:12:

End (vertical) laps shall be minimum 6-inches and side (horizontal) laps shall be minimum 4-inches. Refer to Interwrap, Inc. recommendations for alternate lap configurations and/or the use of sealant under certain conditions.

For exposure \leq 24 hours, use of every-other fastening location printed on the surface is acceptable. For exposure > 24 hours up to maximum 30-days, use of every fastening location printed on the surface is required.

When batten systems are to be installed atop the underlayment, the underlayment need only be preliminarily attached pending attachment of the battens on the same day. Battens shall not be positioned over cap nails. If this occurs, remove the cap nail and patch the hole in accordance with Interwrap published instructions.

6.4.3 Double Layer; 2:12 < Roof Slope < 4:12:

End (vertical) laps shall be minimum 12-inches and side (horizontal) laps shall be minimum half-sheet-width plus 1-inch. Double layer application; begin by fastening a half-width plus 1-inch starter strip along the eaves. Place a full-width sheet over the starter, completely overlapping the starter course. Continue as noted in 6.5, but maintaining minimum half-width plus 1-inch side (horizontal) laps, resulting in a double-layer application.

7. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

8. MANUFACTURING PLANTS:

Contact the manufacturer or the named QA entity for information on plants covered under Rule 61G20-3 QA requirements.

9. QUALITY ASSURANCE ENTITY:

Intertek Testing Services NA Inc.-ETL/Warnock Hersey - QUA1673; (604) 520-3321

- END OF EVALUATION REPORT -

Business & Professional Regulation







Product Approval Menu > Product or Application Search > Application List > Application Detail

Application Type

Code Version Application Status FL5444-R11

Revision

2014 Approved

Comments Archived

Product Manufacturer Address/Phone/Email CertainTeed Corporation-Roofing

18 Moores Road Malvern, PA 19355

(610) 893-5400

mark.d.harner@saint-gobain.com

Authorized Signature

Mark Harner

mark.d.harner@saint-gobain.com

Technical Representative Address/Phone/Email

Mark D. Harner 18 Moores Road Malvern, PA 19355

(610) 651-5847

Mark.D.Harner@saint-gobain.com

Quality Assurance Representative

Address/Phone/Email

Category Subcategory Roofina

Asphalt Shingles

Compliance Method

Evaluation Report from a Florida Registered Architect or a Licensed

Florida Professional Engineer

☐ Evaluation Report - Hardcopy Received

Florida Engineer or Architect Name who developed

the Evaluation Report

Robert Nieminen

Florida License

PE-59166 UL LLC

Quality Assurance Entity

03/09/2020

Quality Assurance Contract Expiration Date

John W. Knezevich, PE

Validated By

✓ Validation Checklist - Hardcopy Received

Certificate of Independence

FL5444 R11 COI 2017 01 COI Nieminen.pdf

Referenced Standard and Year (of Standard)

Standard <u>Year</u> ASTM D3161, Class F 2009 **ASTM D3462** 2009 2008 ASTM D7158, Class H

Equivalence of Product Standards Certified By

Sections from the Code

Product Approval Method

Method 1 Option D

Date Submitted

06/06/2017

Date Validated Date Pending FBC Approval 06/08/2017 06/09/2017

Date Approved

08/08/2017

Summary of Products

FL#	Model, Number or Name	Description
5444.1	CertainTeed Asphalt Roofing Shingles	3-tab, 4-tab, strip (no-cut-outs), laminated and architectural asphalt roof shingles
Approved for Impact Resist Design Press		Installation Instructions FL5444 R11 II 2017 06 FINAL ER CERTAINTEED Asphalt Shingle FL5444-R11.pdf Verified By: Robert Nieminen, PE PE-59166 Created by Independent Third Party: Yes Evaluation Reports FL5444 R11 AE 2017 06 FINAL ER CERTAINTEED Asphalt Shingle FL5444-R11.pdf Created by Independent Third Party: Yes





Contact Us :: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. Copyright 2007-2013 State of Florida :: Privacy Statement :: Accessibility Statement :: Refund Statement

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455,275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click <a href="https://example.com/heres/her

Product Approval Accepts:













EXTERIOR RESEARCH & DESIGN, LLC.

Certificate of Authorization #9503 353 CHRISTIAN STREET, UNIT #13 OXFORD, CT 06478 (203) 262-9245

EVALUATION REPORT

CertainTeed Corporation

20 Moores Road Malvern, PA 19355 (610) 651-5847

SCOPE:

Evaluation Report 3532.09.05-R12 FL5444-R11

Date of Issuance: 09/22/2005 Revision 12: 06/06/2017

This Evaluation Report is issued under Rule 61G20-3 and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the 5th Edition (2014) Florida Building Code sections noted herein.

DESCRIPTION: CertainTeed Asphalt Roofing Shingles.

LABELING: Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein and FBC 1507.2.7.1 / R905.2.6.1

CONTINUED COMPLIANCE: This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. if the product changes or the referenced Quality Assurance documentation changes. Trinity|ERD requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Evaluation Report number preceded by the words "Trinity|ERD Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 12.

Prepared by:

Robert J.M. Nieminen, P.E. Florida Registration No. 59166, Florida DCA ANE1983 STATE OF

The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 06/06/2017. This does not serve as an electronically signed document. Signed, sealed hardcopies have been transmitted to the Product Approval Administrator and to the named client

CERTIFICATION OF INDEPENDENCE:

- Trinity|ERD does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
- 2. Trinity | ERD is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
- 3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
- 4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
- This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.



ROOFING SYSTEMS EVALUATION:

1. SCOPE:

Product Category:

Roofing

Sub-Category:

Asphalt Shingles

Compliance Statement: CertainTeed Asphalt Roofing Shingles, as produced by CertainTeed Corporation, have demonstrated compliance with the following sections of the 5th Edition (2014) Florida Building Code and 5th Edition (2014) Florida Building Code, Residential Volume through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

2. STANDARDS:

<u>Section</u>	<u>Property</u>	<u>Standard</u>	<u>Year</u>
1507.2.5, R905.2.4	Physical Properties	ASTM D3462	2009
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D3161, Class F	2009
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D7158, Class H	2008

3. REFERENCES:

<u>Entity</u>	Examination	Reference	<u>Date</u>
UL (TST 1740)	ASTM D3161	94NK9632	05/15/1998
UL (TST 1740)	ASTM D3161	99NK26506	11/23/1999
UL (TST 1740)	ASTM D3161	03CA12702	05/27/2003
UL (TST 1740)	ASTM D3161	03CA12702	06/16/2003
UL (TST 1740)	ASTM D3161	03NK29847	10/03/2003
UL (TST 1740)	ASTM D3161	04CA11329	05/24/2004
UL (TST 1740)	ASTM D3161	04CA32986	12/03/2004
UL (TST 1740)	ASTM D3161	05NK07049	04/15/2005
UL (TST 1740)	ASTM D3161	05NK16778	05/12/2005
UL (TST 1740)	ASTM D3161	05CA16778	05/12/2005
UL (TST 1740)	ASTM D3161	05NK14836	05/22/2005
UL (TST 1740)	ASTM D3161	05NK22800	06/22/2005
UL (TST 1740)	ASTM D3462	R684	09/21/2005
UL (TST 1740)	ASTM D7158	05NK08037	06/28/2006
UL (TST 1740)	ASTM D3161 & D3462	09CA28873	07/23/2009
UL (TST 1740)	ASTM D3462	10CA41303	10/07/2010
UL (TST 1740)	ASTM D3161	10CA41303	10/08/2010
UL (TST 1740)	ASTM D7158	10CA41303	10/27/2010
UL (TST 1740)	ASTM D3161 & D3462	10CA44960	11/11/2010
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	13CA32897	11/21/2013
UL LLC (TST 9628)	ASTM D3161, D3462	TFWZ.R684	04/22/2014
UL LLC (TST 9628)	ASTM D7158	TGAH.R684	04/22/2014
UL LLC (TST 9628)	ASTM D3161 & D3462	4786334434	09/16/2014
UL LLC (TST 9628)	ASTM D3161 & D3462	4786570826	02/12/2015
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4786570717	12/16/2015
UL LLC (TST 9628)	ASTM D3161 & D3462	4787195678	02/09/2016
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787380356	10/26/2016
UL LLC (TST 9628)	ASTM D3462	4787380357	10/13/2016
UL LLC (TST 9628)	ASTM D7158	4787380357	11/08/2016
UL LLC (TST 9628)	ASTM D3161	4787380357	11/09/2016
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787586427	01/25/2017
UL LLC (QUA 9625)	Quality Control	Service Confirmation	Exp. 03/09/2020

Page 2 of 12



4. PRODUCT DESCRIPTION:

- 4.1 CT20™, XT™ 25, XT™ 30 and XT™ 30 IR are fiberglass reinforced, 3-tab asphalt roof shingles.
- 4.2 Arcadia™, Belmont®, Belmont® IR, Carriage House Shangle®, Grand Manor Shangle®, Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris and Landmark™ Solaris IR are fiberglass reinforced, laminated asphalt roof shingles.
- 4.3 **NorthGate™** is a fiberglass reinforced, laminated, SBS modified bitumen roof shingle.
- 4.4 **Presidential Shake™**, **Presidential Shake™** IR, **Presidential Shake TL™** and **Presidential Solaris™** are fiberglass reinforced, architectural asphalt roof shingles.
- 4.5 Hatteras™, Highland Slate™ and Highland Slate™ IR are fiberglass reinforced, 4-tab asphalt roof shingles.
- 4.6 **Patriot™** is a fiberglass reinforced asphalt roof strip-shingle (with no cut-outs) providing a laminated appearance through an intermittent shadow line with contrasting blend drops for color definition.
- 4.7 Presidential Accessory, Accessory for Hatteras, Shangle Ridge™, Shadow Ridge™, Cedar Crest™, Cedar Crest™ IR, NorthGate Ridge and NorthGate Accessory are fiberglass reinforced accessory shingles for hip and ridge installation.
- 4.8 Any of the above listed shingles may be produced in AR (algae resistant) versions.

5. LIMITATIONS:

- 5.1 This is a building code evaluation. Neither Trinity ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in the HVHZ
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory for fire ratings of this product.
- 5.4 Wind Classification:
- 5.4.1 All shingles noted herein are Classified in accordance with FBC Tables 1507.2.7.1 and R905.2.6.1 to ASTM D3161, Class F and/or ASTM D7158, Class H, indicating the shingles are acceptable for us in all wind zones up to $V_{asd} = 150$ mph ($V_{ult} = 194$ mph). Refer to Section 6 for installation requirements to meet this wind rating.
- 5.4.2 Presidential Accessory, Accessory for Hatteras, Shangle Ridge, Shadow Ridge, Cedar Crest, NorthGate Ridge and NorthGate Accessory hip & ridge shingles have been evaluated in accordance with ASTM D3161, Class
 F. All except NorthGate Ridge and NorthGate Accessory require use of BASF Sonolastic NP 1 adhesive or Henkel PL® Polyurethane Roof & Flashing Sealant, applied as specified in manufacturer's application instructions, for use in wind zones up to V_{asd} = 150 mph (V_{ult} = 194 mph).
- 5.4.3 Classification by **ASTM D7158** applies to **exposure category B or C** and a **building height of 60 feet or less**. Calculations by a qualified design professional are required for conditions outside these limitations. Contact the shingle manufacturer for data specific to each shingle.
- 5.4.3.1 Analysis in accordance with ASTM D7158 indicates the measured uplift resistance (R_T) for the CertainTeed asphalt roofing shingles listed in Section 4.1 through 4.6 (except Presidential Solaris™) exceeds the calculated uplift force (F_T) at a maximum design wind speed of V_{asd} = 150 mph (V_{ult} = 194 mph) for residential buildings located in Exposure D conditions with no topographical variations (flat terrain) having a mean roof height less than or equal to 60 feet. The shingles are permissible under Code for installation in these conditions using the installation procedures detailed in this Evaluation Report and CertainTeed minimum requirements, subject to minimum codified fastening requirements established within any local jurisdiction, which shall take precedence.
- All products in the roof assembly shall have quality assurance audits in accordance with the Florida Building Code and F.A.C. Rule 61G20-3.



6. INSTALLATION:

- 6.1 Roof deck, slope, underlayment and fasteners shall comply with **FBC 1507.2 / R905.2** and the shingle manufacturer's minimum requirements.
- 6.1.1 Underlayment shall be acceptable to **CertainTeed Corporation** and shall hold current Florida Statewide Product Approval, or be Locally Approved per Rule 61G20-3, per **FBC Sections 1507.2.3, 1507.2.4 or R905.2.3**.
- 6.2 Installation of asphalt shingles shall comply with the **CertainTeed Corporation** current published instructions, using minimum four (4) nails per shingle in accordance with **FBC 1507.2.7** or **Section R905.2.6** and the minimum requirements herein.
- 6.2.1 Fasteners shall be in accordance with manufacturer's published requirements, but not less than FBC 1507.2.6 or R905.2.5. Staples are not permitted.
- 6.2.2 Where the roof slope exceeds 21 units vertical in 12 units horizontal, use the "Steep Slope" directions.
- 6.3 CertainTeed asphalt shingles are acceptable for use in reroof (tear-off) or recover applications, subject to the limitations set forth in **FBC Section 1510** and CertainTeed published installation instructions.


6.4 CT20™, XT™ 25, XT™ 30, XT™ 30 IR:

LOW AND STANDARD SLOPE **ENGLISH** (305 mm) ----(305 mm) ---- (305 mm)-(25 mm) Sealant 1" (25 mm) 5 5/8" (145 mm) 5 1/2" for Norwood METRIC 131/8" ----131/8" --131/B" -Sealant 1" (25 mm) 6 1/8

Figure 11-3: Use four nails for every full shingle.

STEEP SLOPE

Use **four** nails and six spots of asphalt roofing cement* for every full shingle (*Figure 11-4*). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.



Apply 1" (25 mm) spots of asphalt roofing cement under each tab corner.

Figure 11-4: Use four nails and six spots of asphalt cement on steep slopes. *CAUTION: Excessive use of roofing cement can cause shingles to blister.

6.4.1 Hip & Ridge for CT20™, XT™ 25, XT™ 30, XT™ 30 IR: Cut Shingles




Figure 11-24: Cut tabs, then trim back to make cap shingles (English dimensions shown).

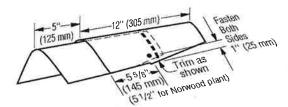


Figure 11-25: Installation of caps along the bips and ridges.

6.4.1.1 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.

Page 4 of 12



6.5 ARCADIA™:

LOW AND STANDARD SLOPE

Use SIX nails for every full shingle located as shown below.

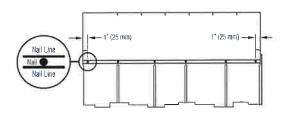


Figure 2: Use six nails for every full shingle.

STEEP SLOPE

Use SIX nails and FOUR spots of asphalt roofing cement for every full shingle as shown below. Apply asphalt roofing cement 1"(25 mm) from edge of shingle. Asphalt roofing cement meeting ASTM D 4586 Type II is suggested.






Figure 3: Use six nails and four spots of asphalt roofing cement on steep slopes.

6.5.1 <u>Hip & Ridge for Arcadia™</u>: Cedar Crest™, Cedar Crest™ IR

Use two (2), minimum 1¾-inch long fasteners per shingle. For the starter shingle, place fastener 1-inch from each side edge and about 2-inch up from the starter shingle's exposed butt edge, ensuring minimum ¾-inch embedment into the deck, or full penetration through the deck. For each full Cedar Crest shingle, place fasteners 8-5/8-inch up from its exposed butt edge and 1-inch from each side edge.

For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements, to hand-seal Cedar Crest shingles. Apply NP 1 or PL adhesive from the middle of the shingle's raised overlay on the top piece and extending approximately 4-inch along the sides of the headlap along a line ¾ to 1-inch from each side of the shingle's headlap. Immediately align and apply the overlying shingle, gently pressing tab sides into the adhesive, and install nails. To secure the other side, apply a 1-inch diameter spot of NP 1 or PL adhesive between the shingle layers.

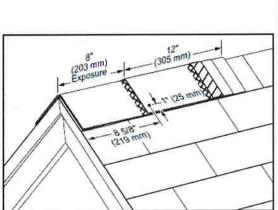





Steep Slope (greater than 21:12):

Use SEVEN nails and EIGHT spots of


asphalt roofing cement** for every full

Roofing Cement

6.6 BELMONT® OR BELMONT® IR:

Low and Standard Slope (2:12 to 21:12):

Use FIVE nails for every full Belmont shingle,

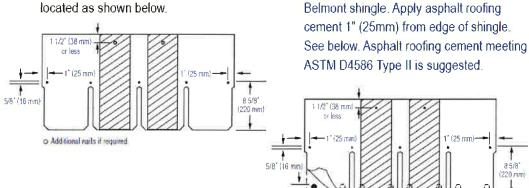

6.6.1 Hip & Ridge for Belmont® or Belmont® IR:

- 6.6.1.1 Option 1: For Belmont®, refer to instructions herein for Cedar Crest™ or Cedar Crest™ IR hip and ridge shingles. For Belmont® IR, refer to instructions herein for Cedar Crest™ IR hip and ridge shingles.
- 6.6.1.2 Option 2: For Belmont®: Shangle® Ridge

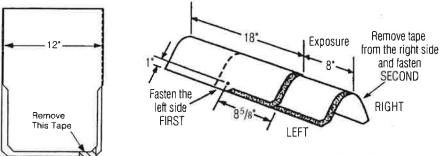


Figure 17-18: Shangle® Ridge.

Figure 17-19: Installation of Shangle® Ridge shingles on hips and ridges.

6.6.1.3 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.



6.7 CARRIAGE HOUSE SHANGLE® AND GRAND MANOR SHANGLE®:

LOW AND STANDARD SLOPE

Use five nails for every full Shangle.




Figure 17-4: Use five nails for every full Grand Manor Shangle, Carriage House Shangle, or Centennial State.

STEEP SLOPE

Use seven nails and three spots of asphalt roofing cement for every full Grand Manor Shangle. Use five nails and three spots of asphalt roofing cement for every full Carriage House Shangle and Centennial Slate. Apply asphalt roofing cement 1" (25 mm) from edge of shingle (Figure 17-5). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.





Figure 17-5: When installing Grand Manor Shangles on steep slopes, use seven nails and three spots of asphalt roofing cement.

- 6.7.1 <u>Hip & Ridge for Carriage House Shangle® and Grand Manor Shangle</u>: Refer to instructions herein for Shangle® Ridge hip and ridge shingles
- 6.8 LANDMARK™, LANDMARK™ IR, LANDMARK™ PRO, LANDMARK™ PREMIUM, LANDMARK™ TL, LANDMARK™ SOLARIS, LANDMARK™ SOLARIS IR, NORTHGATE:

LOW AND STANDARD SLOPE

LANDMARK TL

METRIC DIMENSIONS







Figure 13-4: Use four nails for every full sbingle.

NorthGate:




Nailing areas for low and standard slopes (from 2:12 to 21:12)
Nail between upper & lower lines as shown above.

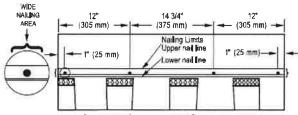

STEEP SLOPE

Use six nails and four spots of asphalt roofing cement for every full laminated shingle. See below. Asphalt roofing cement should meet ASTM D4586 Type II. Apply 1" spots of asphalt roofing cement unde each corner and at about 12" to 13" in from each edge.

METRIC DIMENSIONS

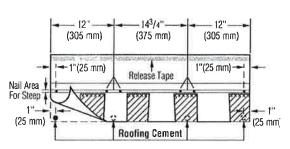

LANDMARK TL


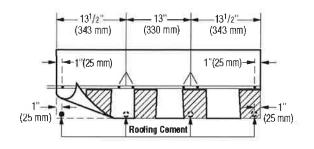


Figure 13-5: Use six nails and four spots of asphalt roofing cement on steep slopes.


NorthGate:

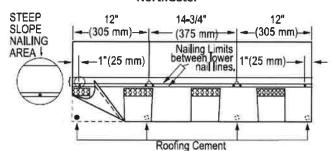


Nailing areas for steep slopes (greater than 21:12) and "Storm-Nailing" Nail between lower 2 nail lines as shown above.


6.8.1 <u>Hip & Ridge for Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris, Landmark™ Solaris IR, NorthGate:</u>

6.8.1.1 Option 1: Shadow Ridge™ or NothGate Accessory







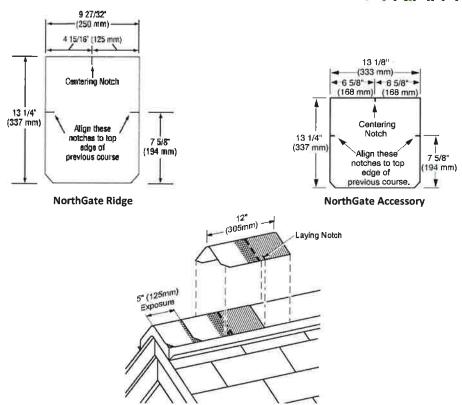

- Figure 13-20: Use laying notcbes to center sbingles on bips and ridges, and to locate the correct exposure.
- 6.8.1.2 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.
- 6.8.1.3 Option 2: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.



6.9 Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™, Presidential Solaris™:

LOW AND STANDARD SLOPE:

For low and standard slopes, use five nails for each full Presidential shingle as shown below.

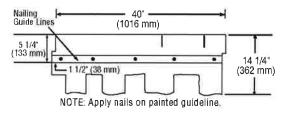


Figure 16-6: Fastening Presidential and Presidential TL Shake sbingles on low and standard slopes.

STEEP SLOPE:

For steep slopes, use nine nails for each full Presidential shingle and apply 1* diameter spots of asphalt roofing cement under each shingle tab. After applying 5 nails in between the nailing guide lines, apply 4 nails 1* above tab cutouts making certain tabs of overlying shingle cover nails.




Figure 16-7: Fastening Presidential and Presidential T/L Shake shingles on steep slopes.

6.9.1 <u>Hip & Ridge for Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™, Presidential Solaris™:</u>

6.9.1.1 Option 1: Presidential Accessory

PRESIDENTIAL ACCESSORY

Presidential accessory shingles can be used for covering hips and ridges. Apply shingles up to the ridge (expose no more than 7" from the bottom edge of the "tooth." Fasten each accessory with two fasteners. The fasteners must be $1^{3}/4$ " long or longer, so they penetrate either 3/4" into the deck or completely through the deck. Presidential accessory comes in two different sizes: Accessory produced in Birmingham, AL is 12" x 12"; Portland, OR produces $9^{7}/8$ " x $13^{1}/4$ " accessory.

- 6.9.1.2 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.
- 6.9.1.3 Option 2: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.

6.10 HATTERAS™:

LOW, STANDARD AND STEEP SLOPE:




Figure 15-3: Fastening Hatteras Sbingles on Low and Standard Slopes

For low and standard slopes, use five nails for each full Hatteras shingle as shown above.




Figure 15-1: Fastening Hatteras Sbingles on Steep Slopes

For steep slopes, use five nails and eight spots of asphalt roofing cement for each full Hatterns shingle as shown above. Apply 1° (25mm) diameter spots of roofing cement (ASTM D 4586 Type II suggested) under each tab corner. Press shingle into place; do not expose cement.

CAUTION: Too much roofing cement can cause shingles to blister.



6.10.1 Hip & Ridge for Hatteras™:

6.10.1.1 **Option 1:** Accessory for Hatteras


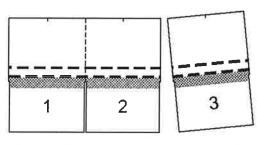


Figure 15-14: 18 three-piece units separate to make 54 Hatteras Accessory shingles.

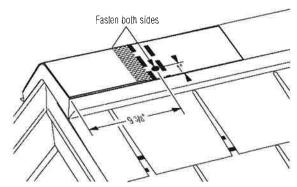

6.10.1.2 Option 2: Cut Hatteras Shingles

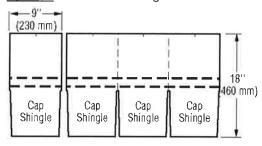


Figure 15-20: Cut Hatteras shingles to make cover cap.

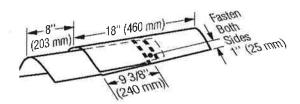


Figure 15-21: Installation of caps along bips and ridges.

6.10.1.3 For **ASTM D3161, Class F** performance use BASF "**Sonolastic® NP1™**" adhesive or Henkel "**PL® Polyurethane Roof & Flashing Sealant**", in accordance with CertainTeed requirements.

6.11 HIGHLAND SLATE™, HIGHLAND SLATE™ IR:

LOW AND STANDARD SLOPE:




Figure 11-3: Use FIVE nails for every Highland Slate sbingle.

STEEP SLOPE:

Use **FIVE** nails and **BIGHT** spots of asphalt roofing cement* for each full Highland Slate shingle. For Miami-Dade, **SIX nails** are required. Apply 1" diameter spots of asphalt roofing cement under each lab corner. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

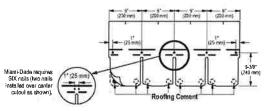


Figure 11-3A: Use FTVE nails and eight spots of asphalt roofing cement under each tab corner.

***CAUTION:** Excessive use of roofing cement can cause shingles to blister.


6.11.1 <u>Hip & Ridge for Highland Slate™, Highland Slate™ IR</u>: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR or Shangle Ridge™ hip and ridge shingles.



6.12 PATRIOT™:

LOW AND STANDARD SLOPE


Use FOUR nails for every full shingle located as shown below.



STEEP SLOPE

Use FOUR nails and four spots of asphalt roofing cement for every full shingle as shown below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested. Apply 1"(25 mm) spots of asphalt roofing cement as shown.

CAUTION: Excessive use of roofing cement can cause shingles to blister.



6.12.1 <u>Hip & Ridge for Patriot™</u>: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR, Shadow Ridge™, NorthGate or Shangle Ridge™ hip and ridge shingles.

7. LABELING:

- 7.1 Each unit shall bear a permanent label with the manufacturer's name, logo, city, state and logo of the Accredited Quality Assurance Agency noted herein.
- 7.2 Asphalt shingle wrappers shall indicate compliance with one of the required classifications detailed in **FBC Table 1507.2.7.1 / R905.2.6.1**.

8. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

9. MANUFACTURING PLANTS:

Contact the named QA entity for information on which plants produce products covered by Florida Rule 61G20-3 QA requirements.

10. QUALITY ASSURANCE ENTITY:

UL LLC - QUA9625; (414) 248-6409; karen.buchmann@us.ul.com

- END OF EVALUATION REPORT -



STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

CONSTRUCTION INDUSTRY LICENSING BOARD 2601 BLAIR STONE ROAD TALLAHASSEE FL 32399-0783

(850) 487-1395

JANNEY, JOHN CARLTON
JANNEY CONSTRUCTION SERVICES LLC
563 JADEWOOD AVE
ORLANDO FL 32825

Congratulations! With this license you become one of the nearly one million Floridians licensed by the Department of Business and Professional Regulation. Our professionals and businesses range from architects to yacht brokers, from boxers to barbeque restaurants, and they keep Florida's economy strong.

Every day we work to improve the way we do business in order to serve you better. For information about our services, please log onto www.myfloridalicense.com. There you can find more information about our divisions and the regulations that impact you, subscribe to department newsletters and learn more about the Department's initiatives.

Our mission at the Department is: License Efficiently, Regulate Fairly. We constantly strive to serve you better so that you can serve your customers. Thank you for doing business in Florida, and congratulations on your new license!



STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

CCC1329428

ISSUED: 08/11/2016

CERTIFIED ROOFING CONTRACTOR
JANNEY, JOHN CARLTON
JANNEY CONSTRUCTION SERVICES LLC

IS CERTIFIED under the provisions of Ch.489 FS
Expiration date AUG 31, 2018 L1608110002128

DETACH HERE

RICK SCOTT, GOVERNOR

KEN LAWSON, SECRETARY

STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION CONSTRUCTION INDUSTRY LICENSING BOARD

LICENSE NUMBER

CCC1329428

The ROOFING CONTRACTOR
Named below IS CERTIFIED
Under the provisions of Chapter 489 FS.
Expiration date: AUG 31, 2018



JANNEY, JOHN CARLTON
JANNEY CONSTRUCTION SERVICES LLC
563 JADEWOOD AVE
ORLANDO FL 32825



DISPLAY AS REQUIRED BY LAW

SEQ # L1608110002128

ISSUED: 08/11/2016



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed.

REPRESENTATIVE OR PRODUCER, A	SURANCE ND THE (E DOES NOT CONSTIT CERTIFICATE HOLDER.	TUTE A CONTRACT	BETWEEN	THE ISSUING INSURE	R(S), /	AUTHORIZED	
IMPORTANT: If the certificate holder if SUBROGATION IS WAIVED, subjecthis certificate does not confer rights to	is an AD	DITIONAL INSURED, the	the policy, certain	policies may	ONAL INSURED provision require an endorseme	ons or	be endorsed, statement on	
PRODUCER	o trie ceri	inicate noider in lied of	CONTACT			_		
Insurance Land		NAME: Leslie Faulkner PHONE (407) 320 3414						
2401 S French Avenue			PHONE (407) 330-3111 FAX (AIG, No. Ext): (407) 330-3105					
2407 6 Fisher Average		ADDRESS: info@insuranceland.org						
Sanford	INSURER(S) AFFORDING COVERAGE INSURER A: WESTERN WORLD				NAIC #			
INSURED	FL 32771					ļ		
			INSURER B :					
Janney Construction Services LLC 563 Jadewood Ave			INSURER C:					
000 0000W000 Ave			INSURER D :					
Orlando		FL 32825	INSURER E :					
	TIEICATE	E NUMBER:	INSURER F:		REVISION NUMBER:			
THIS IS TO CERTIFY THAT THE POLICIES INDICATED. NOTWITHSTANDING ANY RECERTIFICATE MAY BE ISSUED OR MAY EXCLUSIONS AND CONDITIONS OF SUCH	OF INSUI EQUIREME PERTAIN, POLICIES.	RANCE LISTED BELOW H INT, TERM OR CONDITION THE INSURANCE AFFOR LIMITS SHOWN MAY HAV	N OF ANY CONTRAC DED BY THE POLICII E BEEN REDUCED BY	T OR OTHER ES DESCRIBE PAID CLAIMS	ED NAMED ABOVE FOR DOCUMENT WITH RESP	FCT TO	WHICH THIS	
LIR TIPE OF INSURANCE	ADDL SUBR	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	(MM/DD/YYYY)	UMI	TS		
CLAIMS-MADE OCCUR					EACH OCCURRENCE DAMAGE TO RENTED PREMISES (Ea occurrence)	\$ 100		
A -		NDD000000	20/47/2047	00/47/0045	MED EXP (Any one person)	\$ 5,00		
		NPP8336387	02/17/2017	02/17/2018	PERSONAL & ADV INJURY	\$ 1,00		
GEN'L AGGREGATE LIMIT APPLIES PER: PRO- PRO- LOC LOC					GENERAL AGGREGATE	\$ 2,00		
POLICY JECT LOC					PRODUCTS - COMP/OP AGG	\$ 2,00	00,000	
AUTOMOBILE LIABILITY					COMBINED SINGLE LIMIT (Ea accident)	s		
ANY AUTO			1		BODILY INJURY (Per person)	\$		
OWNED SCHEDULED AUTOS ONLY					BODILY INJURY (Per accident)	s		
HIRED NON-OWNED AUTOS ONLY			1		PROPERTY DAMAGE	s	-	
AUTOS SNET			1		(Per assident)	\$		
UMBRELLA LIAB OCCUR					EACH OCCURRENCE	s		
EXCESS LIAB CLAIMS-MADE					AGGREGATE	\$		
DED RETENTION \$					AGGREGATE	\$		
WORKERS COMPENSATION					PER OTH-			
AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE					E.L. EACH ACCIDENT	5		
OFFICER/MEMBER EXCLUDED? (Mandatory in NH)	N/A		1 1	1	E.L. DISEASE - EA EMPLOYEE			
If yes, describe under DESCRIPTION OF OPERATIONS below	1 1			1	E.L. DISEASE - POLICY LIMIT			
Sees in Figure 6, Continue state					E.L. DISEASE - POLICY LIMIT	3		
	1 1		1	İ				
DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLE Roofing	ES (ACORD	101, Additional Remarks Schedu	ile, may be attached if mor	space is require	rd)			
Rooming								
							1	
							1	
ERTIFICATE HOLDER	CANCELLATION							
City of Belle Isle			SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.					
1600 Nela Avenue	AUTHORIZED REPRESENTATIVE							
Belie Isle, FL 32809	Leslie Faulkner/ MT Sicotaulh							

100%

DEPARTMENT OF FINANCIAL SERVICES DIVISION OF WORKERS' COMPENSATION STATE OF FLORIDA

JEFF ATWATER CHIEF FINANCIAL OFFICER

* * CERTIFICATE OF ELECTION TO BE EXEMPT FROM FLORIDA WORKERS' COMPENSATION LAW * *

CONSTRUCTION INDUSTRY EXEMPTION

This certifies that the individual listed below has elected to be exempt from Florida Workers' Compensation law.

EXPIRATION DATE: 9/11/2016 EFFECTIVE DATE:

9/11/2018 NHOS JANNEY

ပ

204403935 FEIN

PERSON:

BUSINESS NAME AND ADDRESS:

JANNEY CONSTRUCTION SERVICES LLC

563 JADEWOOD AVE

교 ORLANDO

32825

SCOPES OF BUSINESS OR TRADE:

LICENSED ROOFING CONTRACTOR LICENSED GENERAL CONTRACTOR

Pursuant to Chapter 440 05(14), F.S., an officer of a corporation who elects exemption from this chapter by filing a certificate of election under this section may not recover benefits or compensation under this chapter. Pursuant to Chapter 440 05(12), F.S. Certificates of election to be exempt apply only within the scope of the business or trade listed on the notice of election to be exempt for the pursuant to Chapter 440 05(13), F.S. Notices of election to be exempt and certificates of election to be exempt. Shall be subject to everoption, it, along time filer the filing of the notice or this issuance of the certificate. The department shall revoke a time person named on the notice or certificate, no longer meets the requirements of this section for issuance of a certificate. The department shall revoke a

DFS-F2-DWC-252 CERTIFICATE OF ELECTION TO BE EXEMPT REVISED 08-13

QUESTIONS? (850)413-1609

7

cott Kandolph, lax Collector

Focal Brilliess 19X Receibt

Urange County, Fiorida

3 local business tax receipt is in addition to and not in lieu of any other tax required by law or municipal ordinance. Businesses are subject to regulation of zoning, health and othe ful authorities. This receipt is valid from October 1 through September 30 of receipt year. Delinquent penalty is added October 1.

EXPIRES

9/30/2017

1806-1112901

1806 CERTIFIED ROOFING CO

\$30.00

BUSINESS OFFICE

\$30.00

1 EMPLOYEE

TOTAL TAX PREVIOUSLY PAID TOTAL DUE

\$60.00 \$60.00 \$0.00

JANNEY JOHN CARLTON

JANNEY CONSTRUCTION SERVICES LLC JANNEY JOHN CARLTON

563 JADEWOOD AVE ORLANDO FL 32825

563 JADEWOOD AVE U - ORLANDO, 32825

PAID: \$60.00 2502-02233104 7/26/2016

This receipt is official when validated by the Tax Collector.