



City of Belle Isle Job Site Card **Roofing PERMIT** 2018-08-067

PERMIT MUST BE POSTED ON SITE - A permit expires in 6 months if approved inspections are not recorded /scheduled within that time frame. You are responsible for scheduling and keeping track of all your inspections -

Permit Number 2018-08-067

Issue Date: 08-23--2018

Site Address: 3615 Ponceau St. 32812

Parcel Number: 17-23-30-4384-02-740

Class: Residential

Subdivision:

Description of Work: Re-roof 4500 SQFT - Asphalt Shingles

Issued To: COMPLETE QUALITY ROOFING CO.

Business Phone: 321 332-3392

Name: QUEVEDO, LUIS F

Contractor License CCC1328368

Payment Date & Method: 8 / 23 / 2018 Picked up by _____

Visa Master Card Amex Discover Check / Money Order # 21007

Schedule Inspections via Email at: BI scheduling@universalengineering.com

SCHEDULE INSPECTIONS BY 3PM CUT OFF TIME

Inspection Results Will Be Sent Out the Following Business Day

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

ROOF INSPECTOR DATE COMMENTS

| | | | |
|---|--|--|--|
| NEW ROOFS ONLY Code 700 Deck Nailing, Dry-In, Flashing | | | |
| Both new & re-roof Code 710 In - Progress | | | |
| Both new & re-roof Code 720 Final | | | |

Inspection requests are to be emailed to BI scheduling@UniversalEngineering.com; a confirmation email will be sent back to you upon scheduling. **Next-Day Inspection requests must be made by 3:00 pm.**

Please include the following in your request: Permit #, project address, type of inspection, date of the requested inspection, a contact name & a contact phone number. AM or PM may be requested but cannot be guaranteed.



RECEIVED
AUG 22 2018

City of Belle Isle
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811
Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

APPLICATION FOR ROOFING PERMIT

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

DATE OF APPLICATION: 8/21/2018 ROOF PERMIT NUMBER 2018-08067
PLEASE PRINT. The undersigned hereby applies for a permit to make installations as indicated below:

Project Address 3615 Ponceau St, Belle Isle, FL 32809 32812
Property Owner Shawn & Patricia Nielsen Phone _____
Property Owner's Mailing Address 3615 Ponceau St City Belle Isle
State FL Zip Code 32812 Parcel Id Number: 17-23-30-4384-02-740

REQUIRED! To obtain this information, please visit <http://www.ospeff.org/Searches/ParcelSearch.aspx>

Class of Building: Old New Type of Building: Residential Commercial Other
Type of Work: New Roof ReRoof

REQUIRED! Florida Product Approval Form - NOTE: installation instructions must be posted on-site before your first inspection!!

Please indicate the nature of work by completing the information below

Roof Square Footage: 45 Number of Stories: 1 Job Valuation: \$ 16,237
Type: Asphalt Shingles Metal Modified Bitumen Other: _____

>15

I hereby certify that the above is true and correct to the best of my knowledge and make Application for Permit as outlined above, and if same is granted I agree to conform to all Florida Building Code Regulations and City Ordinances regulating same and in accordance with plans submitted. The issuance of this permit does not grant permission to violate any applicable Town and/or State of Florida codes and/or ordinances. By signing below, I recognize Republic Services is by legal contract the sole authorized provider of garbage, recycling, yard waste and commercial garbage and construction debris collection and disposal services with the city limits of the City. Contractors, homeowners and commercial businesses may contact Republic Services at 407-293-8000 to setup accounts for Commercial, Construction Roll Off, or other services needed. Rates are fixed by contract and are available at City Hall or from Republic Services. The City enforces the contract through its code enforcement office. Failure to comply will result in a stop work order.

LICENSE HOLDER SIGNATURE [Signature] LICENSE # CCC1328368
LICENSE HOLDER NAME Luis Quevedo COMPANY NAME Complete Quality Roofing, Co
Street Address 2875 S. Orange Ave #500-1515
City Orlando State FL Zip Code 32806 Phone Number 321-332-3392
Email Address lquevedo@revildor.com

Zoning Fee \$ 30.00
Building Fee \$ 105.00
Review Fee \$ -
1% BCAIB Fee \$ 2.00
5% DCA Fee \$ 2.00
Total Permit Fee \$ 139.00

Building Official: SM Date 8-23-18
Verified Contractor's Licenses & Insurance are on file [Signature] Date 8-22-2018

PENDING Product Approval Form
NOTE: The Building Permit Number is required if the Roof Installation is associated with any construction or alteration where a Building Permit has been issued.
Responsibility Fee 157.110 25
1625 20
105

PAID
8-22-2018
Alex 21007

Permit Number: _____
 Folio/Parcel ID #: 17-23-30-4384-02-740
 Prepared by: Luis Quevedo, Revildor.
2875 S. Orange Ave #500-1515
Orlando, FL 32806
 Return to: _____
lquevedo@revildor.com

DOCH 20180497269
 08/21/2018 11:40:36 AM Page 1 of 1
 Rec Fee: \$10.00
 Phil Diamond, Comptroller
 Orange County, FL
 IP - Ret To: LUIS QUEVEDO



NOTICE OF COMMENCEMENT

State of Florida, County of Orange
 The undersigned hereby gives notice that improvement will be made to certain real property, and in accordance with Chapter 713, Florida Statutes, the following information is provided in this Notice of Commencement.

1. **Description of property** (legal description of the property, and street address if available)
LAKE CONWAY ESTATES SECTION 5 Y/112 LOT 2- 3615 Ponceau St Belle Isle, FL 32812
2. **General description of improvement**
Re-Roof SFR
3. **Owner information or Lessee information if the Lessee contracted for the improvement**
 Name Nielsen Shawn M & Nielsen Patricia A
 Address 3615 Ponceau St Belle Isle, FL 32812
 Interest in Property Owner
Name and address of fee simple titleholder (if different from Owner listed above)
 Name N/A
 Address _____
4. **Contractor**
 Name Luis Quevedo Telephone Number 321-332-3392
 Address 2875 S. Orange Ave #500-1515 Orlando, FL 32806
5. **Surety** (if applicable, a copy of the payment bond is attached)
 Name N/A Telephone Number _____
 Address _____ Amount of Bond \$ _____
6. **Lender**
 Name N/A Telephone Number _____
 Address _____
7. **Persons within the State of Florida designated by Owner upon whom notices or other documents may be served as provided by §713.13(1)(a)7, Florida Statutes.**
 Name N/A Telephone Number _____
 Address _____
8. **In addition to himself or herself, Owner designates the following to receive a copy of the Lienor's Notice as provided in §713.13(1)(b), Florida Statutes.**
 Name N/A Telephone Number _____
 Address _____
9. **Expiration date of notice of commencement** (the expiration date will be 1 year from the date of recording unless a different date is specified) _____

State of Florida, County of Orange
 I hereby certify that this is a true copy of the document as reflected in the Official Records
 BY: Phil Diamond, County Comptroller
 DATED: AUG 21 2018, D.C.



WARNING TO OWNER: ANY PAYMENTS MADE BY THE OWNER AFTER THE EXPIRATION OF THE NOTICE OF COMMENCEMENT ARE CONSIDERED IMPROPER PAYMENTS UNDER CHAPTER 713, PART I, SECTION 713.13, FLORIDA STATUTES, AND CAN RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE COMMENCING WORK OR RECORDING YOUR NOTICE OF COMMENCEMENT.

Shawn Nielsen Patricia Nielsen _____ **Owner**
 Signature of Owner or Lessee, or Owner's or Lessee's Authorized Officer/Director/Partner/Manager Signatory's Title/Office

The foregoing instrument was acknowledged before me this 17 day of Aug 2018 by Shawn Nielsen & Patricia Nielsen
 month/year name of person

AS _____ for _____
 Type of authority, e.g., officer, trustee, attorney in fact Name of party on behalf of whom instrument was executed

M Cady
 Signature of Notary Public, State of Florida

MIRIAM CADY
 Print, type, or stamp commissioned name of Notary Public

Personally Known OR Produced ID _____
 Type of ID Produced _____





City of Belle Isle

Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811
 Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

Product Approval Form

DATE: 8/23/18

PERMIT # 2018-08-067

PROJECT ADDRESS 3615 Ponceau St, Belle Isle, FL 32809 x 32812

As required by Florida Statute 553.842 and Florida Administrative Code 9B-72m, please provide the information and approval numbers of the building components listed below if they will be utilized on the building or structure. FL Approved products are listed online at www.floridabuilding.org or can be obtained from the local product supplier. The following information must be turned in with permit application and available onsite for inspections:

1. **This Product Approval Cover Sheet**
2. **Internet screen from FloridaBuilding.org showing PA#, approval and code edition stamped**
3. **Manufacturer's *installation* details from FloridaBuilding.org and requirements for each product stamped**

| Product Type | Manufacturer | Model/Series | FL Product Approval # | Product Type | Manufacturer | Model/Series | FL Product Approval # |
|------------------------------|--------------|--------------|-----------------------|-------------------------|-----------------|--------------|-----------------------|
| EXTERIOR DOORS | | | | WALL PANELS | | | |
| Swinging | | | | Sliding | | | |
| Sliding | | | | Soffits | | | |
| Sectional/Rollup | | | | Storefront | | | |
| Other | | | | Glass Block | | | |
| | | | | Other | | | |
| WINDOWS | | | | ROOFING PRODUCTS | | | |
| Single/Dbl Hung | | | | Asphalt Shingles | CertainTeed | LandMark | 5444-R12 |
| Horizontal Slider | | | | Non Struct Metal | | | |
| Casement | | | | Roofing Tiles | | | |
| Fixed | | | | Single Ply Roof | | | |
| Mullion | | | | Underlayment | Interwrap, Inc. | Rhinoshield | 15216-R2 |
| Skylights | | | | Other | | | |
| Other | | | | | | | |
| STRUCTURAL COMPONENTS | | | | OTHER | | | |
| Wood Connectors | | | | | | | |
| Wood Anchors | | | | | | | |
| Truss Plates | | | | | | | |
| Insulation Forms | | | | | | | |
| Lintels | | | | | | | |
| Other | | | | | | | |

It is the applicant's responsibility to verify that specific products have been installed in accordance with their limitations and with the minimum required design pressures for the structure. Specific compliance will be verified during field inspections.

Applicant Signature 

Date 8/23/18



[BCIS Home](#) |
 [Log In](#) |
 [User Registration](#) |
 [Hot Topics](#) |
 [Submit Surcharge](#) |
 [Stats & Facts](#) |
 [Publications](#) |
 [Contact Us](#) |
 [BCIS Site Map](#) |
 [Links](#) |
 [Search](#)



Product Approval
USER: Public User

[Product Approval Menu](#) >
 [Product or Application Search](#) >
 [Application List](#) >
 Application Detail



| | | |
|--|---|-------------------------------------|
| FL # | FL5444-R14 | |
| Application Type | Revision | |
| Code Version | 2017 | |
| Application Status | Approved | |
| Comments | | |
| Archived | <input type="checkbox"/> | |
| Product Manufacturer | CertainTeed Corporation-Roofing | |
| Address/Phone/Email | 20 Moores Road Malvern, PA 19355 (610) 893-5400 mark.d.harner@saint-gobain.com | |
| Authorized Signature | Mark Harner mark.d.harner@saint-gobain.com | |
| Technical Representative | Mark D. Harner 18 Moores Road Malvern, PA 19355 (610) 651-5847 Mark.D.Harner@saint-gobain.com | |
| Quality Assurance Representative | | |
| Address/Phone/Email | | |
| Category | Roofing | |
| Subcategory | Asphalt Shingles | |
| Compliance Method | Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received | |
| Florida Engineer or Architect Name who developed the Evaluation Report | Robert Nieminen | |
| Florida License | PE-59166 | |
| Quality Assurance Entity | UL LLC | |
| Quality Assurance Contract Expiration Date | 03/09/2020 | |
| Validated By | John W. Knezevich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received | |
| Certificate of Independence | FL5444_R14_COI_2018_01_COI_NIEMINEN.pdf | |
| Referenced Standard and Year (of Standard) | Standard ASTM D3161 ASTM D3462 ASTM D7158 | Year 2016 2010 2011 |
| Equivalence of Product Standards Certified By | | |
| Sections from the Code | | |



NEMO|etc.

Certificate of Authorization #32455
353 Christian Street, Unit #13
Oxford, CT 06478
(203) 262-9245

ENGINEER

EVALUATE

TEST

CONSULT

CERTIFY

EVALUATION REPORT

CertainTeed Corporation

20 Moores Road
Malvern, PA 19355
(610) 651-5847

Evaluation Report 3532.09.05-R15

FL5444-R14

Date of Issuance: 09/22/2005

Revision 15: 05/29/2018

SCOPE:

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the **6th Edition (2017) Florida Building Code** sections noted herein.

DESCRIPTION: CertainTeed Asphalt Roof Shingles.

LABELING: Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein and **FBC 1507.2.7.1 / R905.2.6.1**

CONTINUED COMPLIANCE: This Evaluation Report is valid until the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. of any changes to the product(s), the Quality Assurance or the production facility location(s). NEMO|etc. requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Evaluation Report number preceded by the words "NEMO|etc. Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 15.

Prepared by:

Robert J.M. Nieminen, P.E.

Florida Registration No. 59166, Florida DCA ANE1983



The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 05/29/2018. This does not serve as an electronically signed document.

CERTIFICATION OF INDEPENDENCE:

1. NEMO|etc. does not have, nor does it intend to acquire, or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
2. NEMO|etc. is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
5. This is a building code evaluation. Neither NEMO|etc. nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.

ROOFING SYSTEMS EVALUATION:
1. SCOPE:
Product Category: Roofing

Sub-Category: Asphalt Shingles

Compliance Statement: CertainTeed Asphalt Roof Shingles, as produced by CertainTeed Corporation, have demonstrated compliance with the following sections of the 6th Edition (2017) Florida Building Code and 6th Edition (2017) Florida Building Code, Residential Volume through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

2. STANDARDS:

| <u>Section</u> | <u>Property</u> | <u>Standard</u> | <u>Year</u> |
|------------------------|---------------------|-----------------|-------------|
| 1507.2.5, R905.2.4 | Physical Properties | ASTM D3462 | 2010 |
| 1507.2.7.1, R905.2.6.1 | Wind Resistance | ASTM D3161 | 2016 |
| 1507.2.7.1, R905.2.6.1 | Wind Resistance | ASTM D7158 | 2011 |

3. REFERENCES:

| <u>Entity</u> | <u>Examination</u> | <u>Reference</u> | <u>Date</u> |
|-------------------|---------------------------|----------------------|-----------------|
| UL (TST 1740) | ASTM D3161 | 94NK9632 | 05/15/1998 |
| UL (TST 1740) | ASTM D3161 | 99NK26506 | 11/23/1999 |
| UL (TST 1740) | ASTM D3161 | 03CA12702 | 05/27/2003 |
| UL (TST 1740) | ASTM D3161 | 03CA12702 | 06/16/2003 |
| UL (TST 1740) | ASTM D3161 | 03NK29847 | 10/03/2003 |
| UL (TST 1740) | ASTM D3161 | 04CA11329 | 05/24/2004 |
| UL (TST 1740) | ASTM D3161 | 04CA32986 | 12/03/2004 |
| UL (TST 1740) | ASTM D3161 | 05NK07049 | 04/15/2005 |
| UL (TST 1740) | ASTM D3161 | 05NK16778 | 05/12/2005 |
| UL (TST 1740) | ASTM D3161 | 05CA16778 | 05/12/2005 |
| UL (TST 1740) | ASTM D3161 | 05NK14836 | 05/22/2005 |
| UL (TST 1740) | ASTM D3161 | 05NK22800 | 06/22/2005 |
| UL (TST 1740) | ASTM D3462 | R684 | 09/21/2005 |
| UL (TST 1740) | ASTM D7158 | 05NK08037 | 06/28/2006 |
| UL (TST 1740) | ASTM D3161 & D3462 | 09CA28873 | 07/23/2009 |
| UL (TST 1740) | ASTM D3462 | 10CA41303 | 10/07/2010 |
| UL (TST 1740) | ASTM D3161 | 10CA41303 | 10/08/2010 |
| UL (TST 1740) | ASTM D7158 | 10CA41303 | 10/27/2010 |
| UL (TST 1740) | ASTM D3161 & D3462 | 10CA44960 | 11/11/2010 |
| UL LLC (TST 9628) | ASTM D3161, D3462 & D7158 | 13CA32897 | 11/21/2013 |
| UL LLC (TST 9628) | ASTM D3161, D3462 | TFWZ.R684 | 04/22/2014 |
| UL LLC (TST 9628) | ASTM D7158 | TGAH.R684 | 04/22/2014 |
| UL LLC (TST 9628) | ASTM D3161 & D3462 | 4786334434 | 09/16/2014 |
| UL LLC (TST 9628) | ASTM D3161 & D3462 | 4786570826 | 02/12/2015 |
| UL LLC (TST 9628) | ASTM D3161 | 4786821352 | 02/21/2015 |
| UL LLC (TST 9628) | ASTM D3161, D3462 & D7158 | 4786570717 | 12/16/2015 |
| UL LLC (TST 9628) | ASTM D3161 & D3462 | 4787195678 | 02/09/2016 |
| UL LLC (TST 9628) | ASTM D3161, D3462 & D7158 | 4787592174 | 10/21/2016 |
| UL LLC (TST 9628) | ASTM D3161, D3462 & D7158 | 4787380356 | 10/26/2016 |
| UL LLC (TST 9628) | ASTM D3462 | 4787380357 | 10/13/2016 |
| UL LLC (TST 9628) | ASTM D7158 | 4787380357 | 11/08/2016 |
| UL LLC (TST 9628) | ASTM D3161 | 4787380357 | 11/09/2016 |
| UL LLC (TST 9628) | ASTM D3161, D3462 & D7158 | 4787586427 | 01/25/2017 |
| UL LLC (TST 9628) | ASTM D3161 & D3462 | 4788042412 | 11/15/2017 |
| UL LLC (TST 9628) | ASTM D3161, D3462 & D7158 | 4788362767 | 03/03/2018 |
| UL LLC (QUA 9625) | Quality Control | Service Confirmation | Exp. 03/09/2020 |

4. PRODUCT DESCRIPTION:

4.1 Asphalt Shingles:

- 4.1.1 CT20™, XT™ 25, XT™ 30 and XT™ 30 IR are fiberglass reinforced, 3-tab asphalt roof shingles.
- 4.1.2 Arcadia™, Belmont®, Belmont® IR, Carriage House Shingle®, Grand Manor Shingle®, Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Pro Solaris, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris, Landmark™ Solaris IR and Landmark™ Solaris Gold/Platinum are fiberglass reinforced, laminated asphalt roof shingles.
- 4.1.3 NorthGate™ is a fiberglass reinforced, laminated, SBS modified bitumen roof shingle.
- 4.1.4 Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™ and Presidential Solaris™ are fiberglass reinforced, architectural asphalt roof shingles.
- 4.1.5 Hatteras™, Highland Slate™ and Highland Slate™ IR are fiberglass reinforced, 4-tab asphalt roof shingles.
- 4.1.6 Patriot™ is a fiberglass reinforced asphalt roof strip-shingle (with no cut-outs) providing a laminated appearance through an intermittent shadow line with contrasting blend drops for color definition.

4.2 Hip & Ridge Shingles:

- 4.2.1 Presidential Accessory, Accessory for Hatteras, Shingle Ridge™, Shadow Ridge™, Cedar Crest™, Cedar Crest™ IR, NorthGate Ridge and NorthGate Accessory are fiberglass reinforced accessory shingles for hip and ridge installation.

4.3 Accessory Starter Strips:

- 4.3.1 High-Performance Starter is a starter shingle, measuring 10" x 36", comprised of a fiber glass mat base and ceramic-coated mineral granules embedded in asphalt. These starter shingles are designed for use with Grand Manor Shingle®, Hatteras™ and Highland Slate™.
- 4.3.2 Presidential Starter is a starter shingle, measuring 13-1/4" x 40" (overall), comprised of a fiber glass mat base and ceramic-coated mineral granules embedded in asphalt with a reinforcement on its underside (for impact resistance considerations). These starter shingles, applied using two (2) overlapping layers, are designed for use with Presidential Shake™ and Presidential Shake TL™.
- 4.3.3 Presidential Starter IR is a starter shingle, measuring 13-1/4" x 40" (overall), comprised of a fiber glass mat base and ceramic-coated mineral granules embedded in asphalt. These starter shingles, applied using two (2) overlapping layers, are designed for use with Presidential Shake™ IR.
- 4.3.4 SwiftStart® Starter Shingle is a starter strip for asphalt roof shingles. Its overall size of 15-1/4" x 38-3/4" yields two (2) 7-5/8" x 38-3/4" starter pieces per shingle.
- 4.3.5 Universal Starter is a starter shingle, measuring 7" x 36" (overall), comprised of a fiber glass mat base and ceramic-coated mineral granules embedded in asphalt. These starter shingles are designed for use with any CertainTeed shingle measuring 12" x 36" having a weather exposure ≤ 5".
- 4.4 Any of the above listed shingles may be produced in AR (algae resistant) versions.

5. LIMITATIONS:

- 5.1 This is a building code evaluation. Neither NEMO|etc. nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use within FBC HVHZ jurisdictions.
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory for fire ratings of this product.

- 5.4 **Wind Classification:**
- 5.4.1 All shingles noted herein are Classified in accordance with **FBC Tables 1507.2.7.1 and R905.2.6.1 to ASTM D3161, Class F and/or ASTM D7158, Class H**, indicating the shingles are acceptable for us in all wind zones up to $V_{asd} = 150$ mph ($V_{ult} = 194$ mph). Refer to Section 6 for installation requirements to meet this wind rating.
- 5.4.2 **Presidential Accessory, Accessory for Hatteras, Shangle Ridge, Shadow Ridge, Cedar Crest, NorthGate Ridge and NorthGate Accessory hip & ridge shingles** have been evaluated in accordance with **ASTM D3161, Class F**. All except NorthGate Ridge and NorthGate Accessory require use of **BASF Sonolastic NP 1 adhesive or Henkel PL® Polyurethane Roof & Flashing Sealant**, applied as specified in manufacturer's application instructions, for use in wind zones up to $V_{asd} = 150$ mph ($V_{ult} = 194$ mph). Refer to Section 6 for installation requirements to meet this wind rating.
- 5.4.3 **High-Performance Starter, Presidential Starter, Presidential Starter IR, SwiftStart® Starter Shingle and Universal Starter** have been evaluated in accordance with **ASTM D3161, Class F**. Refer to Section 6 for installation requirements to meet this wind rating.
- 5.4.3.1 **High-Performance Starter** shingles are limited to use with **Grand Manor Shangle®, Hatteras™ and Highland Slate™** shingles.
- 5.4.3.2 **Presidential Starter** shingles must be applied using two (2) overlapping layers and are limited to use with **Presidential Shake™ and Presidential Shake TL™** shingles.
- 5.4.3.3 **Presidential Starter IR** shingles must be applied using two (2) overlapping layers and are limited to use with **Presidential Shake™ IR** shingles.
- 5.4.3.4 **Universal Starter** shingles are limited to use with CertainTeed shingles measuring 12" x 36" having a weather exposure $\leq 5"$.
- 5.4.4 Classification by **ASTM D7158** applies to **exposure category B or C** and a **building height of 60 feet or less**. Calculations by a qualified design professional are required for conditions outside these limitations. Contact the shingle manufacturer for data specific to each shingle.
- 5.4.4.1 **Analysis in accordance with ASTM D7158** indicates the measured uplift resistance (R_T) for the CertainTeed asphalt Roof shingles listed in Section 4.1.1 through 4.1.6 (*except Presidential Solaris™, Landmark™ Pro Solaris and Landmark™ Solaris Gold/Platinum*) exceeds the calculated uplift force (F_T) at a maximum design wind speed of $V_{asd} = 150$ mph ($V_{ult} = 194$ mph) for **residential buildings** located in **Exposure D conditions with no topographical variations (flat terrain)** having a **mean roof height less than or equal to 60 feet**. The shingles are permissible under Code for installation in these conditions using the installation procedures detailed in this Evaluation Report and CertainTeed minimum requirements, subject to minimum codified fastening requirements established within any local jurisdiction, which shall take precedence.
- 5.5 All products in the roof assembly shall have quality assurance audits in accordance with **FAC Rule 61G20-3**.

6. INSTALLATION:


- 6.1 Roof deck, slope, underlayment and fasteners shall comply with **FBC 1507.2 / R905.2** and the shingle manufacturer's minimum requirements.
- 6.1.1 Underlayment shall be acceptable to **CertainTeed Corporation** and shall hold current Florida Statewide Product Approval, or be Locally Approved per **Rule 61G20-3**, per **FBC Sections 1507.2.3, 1507.2.4 or R905.2.3**.
- 6.2 Installation of asphalt shingles shall comply with the **CertainTeed Corporation** current published instructions, using minimum four (4) nails per shingle in accordance with **FBC 1507.2.7 or Section R905.2.6** and the minimum requirements herein.
- 6.2.1 Fasteners shall be in accordance with manufacturer's published requirements, but not less than **FBC 1507.2.6 or R905.2.5**. Staples are not permitted.
- 6.2.2 Where the roof slope exceeds 21 units vertical in 12 units horizontal, use the "Steep Slope" directions.
- 6.3 CertainTeed asphalt shingles are acceptable for use in reroof (tear-off) or recover applications, subject to the limitations set forth in **FBC Section 1511 or R908** and CertainTeed published installation instructions.

6.4 HIGH-PERFORMANCE STARTER:

- 6.4.1 Eaves: For the first starter shingle in each roof corner, use five (5) nails as shown below. All other starter shingles require four (4) nails per shingle. Nails must be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads. Apply the 10" starter shingle with its factory-applied sealant stripes at the shingle's lower-most edge and nail firmly into the roof deck as near as possible *(maximum 3") to the eaves edge while avoiding the sealant. With the starter shingle well fastened to the deck and the sealant low on the starter shingle, it can firmly adhere to the first course shingles. *If nailing within 3" is not possible, nail as closely as possible, then lift and adhere the starter shingle to the underlayment and to the supporting structure with CertainTeed FlintBond™ Asphalt Roofing Cement-Caulk Grade, or approved equal.

Rakes: Prior to installation of the field shingles, starter shingles may be applied up the slope along the rake edge with sealant edge placed closest to the rake edge. Fasten as indicated below.

HIGH-PERFORMANCE STARTER SHINGLES

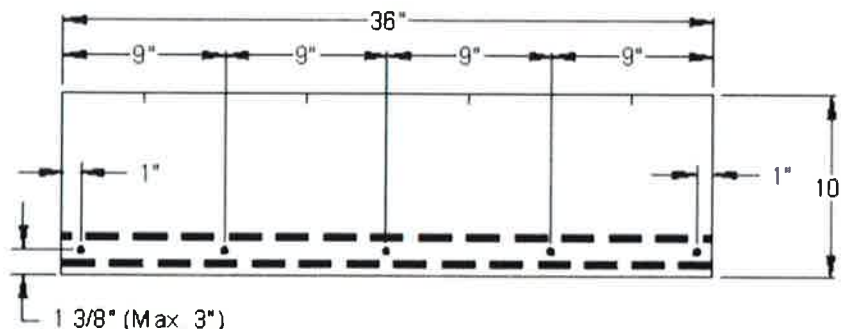


6.5 PRESIDENTIAL STARTER AND PRESIDENTIAL STARTER IR:

6.5.1 General: These shingles shall be applied by using two (2) overlapping layers. Begin application of the bottom/lower layer of starter shingles by cutting and applying a 13-3/4" x 20" piece at the lower left rake/eaves corner overhanging rakes and eaves 1/4" to 3/4". Continue along the eaves with full-size 13-1/4" x 40" starter shingles. Each top/upper starter course shingle shall have its 2" top section removed at the perforations, resulting in 11-1/4" x 40" shingles. The colored granule portion of the "top" starter shingles shall be located nearest the lowermost eave edge. Install the first top/upper starter shingle so that it is flush to the left side and bottom edges of the first bottom/lower starter shingle. This first top/upper starter shingle shall be 11-1/4" x 38". Continue along the eaves with 11-1/4" x 40" top/upper starter shingles ensuring that the lower edges are flush with the lower edges of the bottom/lower layer. Reference the product's wrapper for more specific details.

Eaves: Fasten as shown below. Rakes: After applying the starter shingles at the eaves, but prior to installing the field shingles, starter shingles may be applied up the slope at the rake edge. Fasten as shown below.

Fastening: Four nails are required per shingle. Nails shall be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads.

Presidential Starter and Presidential IR Starter Shingles

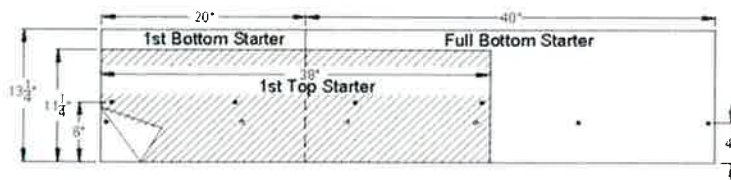


6.6 UNIVERSAL STARTER:

6.6.1 General: While Universal Starter Strip shingles are specifically designed to be used with shingles 36" length and having a weather exposure of $\leq 5"$, they may be installed beneath shingles of any length if special precautions are taken. **IMPORTANT:** In all cases the end joints of the starter and the first course shingles shall NEVER BE LESS THAN 3-1/2" apart.

Eaves: The sealant on starter courses should face out and lie as close as possible to the eaves edge of the roof. Fasten as described below. Rakes: After applying the starter shingles at the eaves, but prior to installing the field shingles, starter shingles may be applied up the slope at the rake edge with sealant facing out and nearest to the outer roof edge. Fasten as described below.


Fastening: Use four nails on these starter shingles as shown below. The sealant on starter courses shall lie as close as possible to the eaves edge of the roof. Nails shall be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads.

UNIVERSAL STARTER SHINGLES

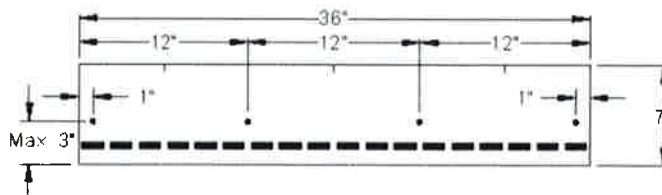

6.7 SWIFTSTART® STARTER SHINGLE:


Fastening: Use four nails, located as shown below

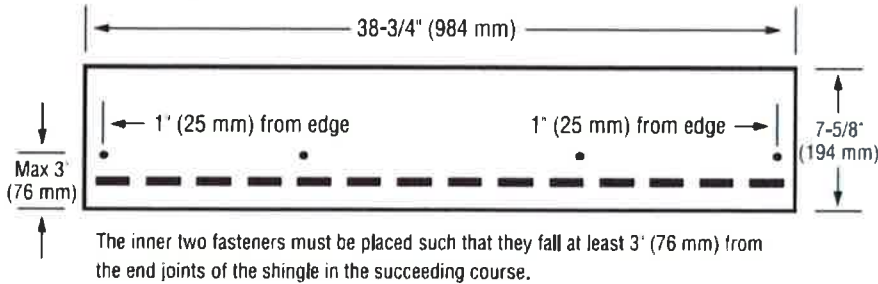

6.8 CT20™, XT™ 25, XT™ 30, XT™ 30 IR:

LOW AND STANDARD SLOPE

ENGLISH

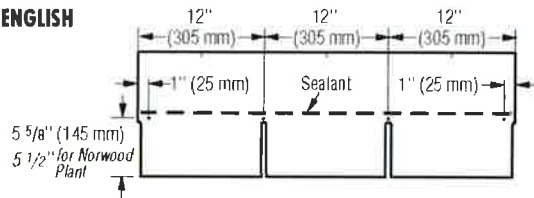

METRIC


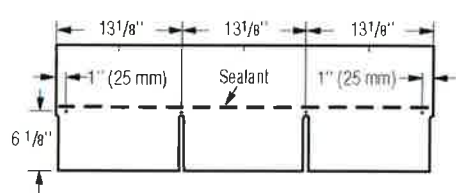


Figure 11-3: Use **four nails** for every full shingle.

STEEP SLOPE

Use **four nails** and six spots of asphalt roofing cement* for every full shingle (Figure 11-4). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

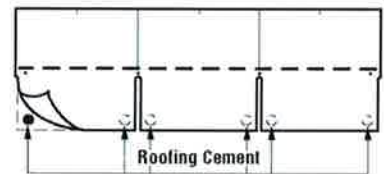

Apply 1" (25 mm) spots of asphalt roofing cement under each tab corner.

Figure 11-4: Use **four nails** and **six spots of asphalt cement** on steep slopes.

***CAUTION:** Excessive use of roofing cement can cause shingles to blister.

6.8.1 Hip & Ridge for CT20™, XT™ 25, XT™ 30, XT™ 30 IR: Cut Shingles

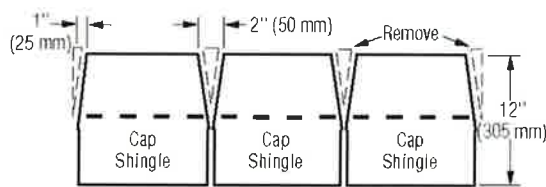


Figure 11-24: Cut tabs, then trim back to make cap shingles (English dimensions shown).

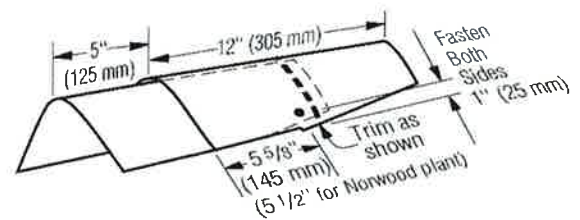


Figure 11-25: Installation of caps along the hips and ridges.

6.8.1.1 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.9 ARCADIA™:

LOW AND STANDARD SLOPE

Use SIX nails for every full shingle located as shown below.

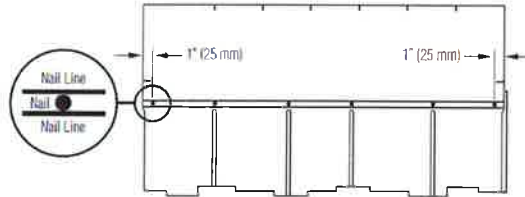


Figure 2: Use six nails for every full shingle.

STEEP SLOPE

Use SIX nails and FOUR spots of asphalt roofing cement for every full shingle as shown below. Apply asphalt roofing cement 1" (25 mm) from edge of shingle. Asphalt roofing cement meeting ASTM D 4586 Type II is suggested.


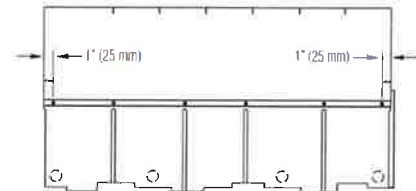


Figure 3: Use six nails and four spots of asphalt roofing cement on steep slopes.

6.9.1 Hip & Ridge for Arcadia™: Cedar Crest™, Cedar Crest™ IR

Use two (2), minimum 1¾-inch long fasteners per shingle. For the starter shingle, place fastener 1-inch from each side edge and about 2-inch up from the starter shingle's exposed butt edge, ensuring minimum ¾-inch embedment into the deck, or full penetration through the deck. For each full Cedar Crest shingle, place fasteners 8-5/8-inch up from its exposed butt edge and 1-inch from each side edge.


For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements, to hand-seal Cedar Crest shingles. Apply NP 1 or PL adhesive from the middle of the shingle's raised overlay on the top piece and extending approximately 4-inch along the sides of the headlap along a line ¾ to 1-inch from each side of the shingle's headlap. Immediately align and apply the overlying shingle, gently pressing tab sides into the adhesive, and install nails. To secure the other side, apply a 1-inch diameter spot of NP 1 or PL adhesive between the shingle layers.

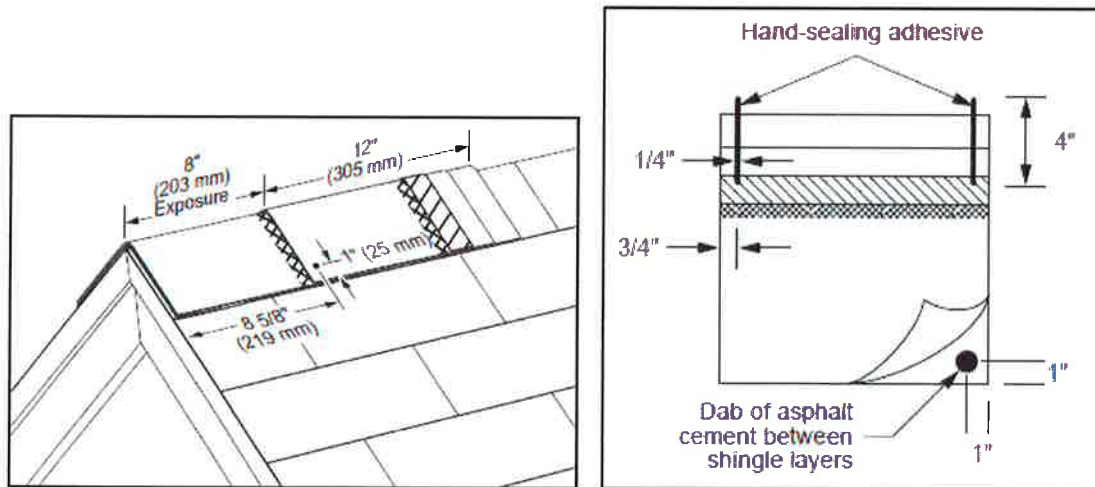

6.10 BELMONT® OR BELMONT® IR:


**Low and Standard Slope
(2:12 to 21:12):**

Use FIVE nails for every full Belmont shingle, located as shown below.

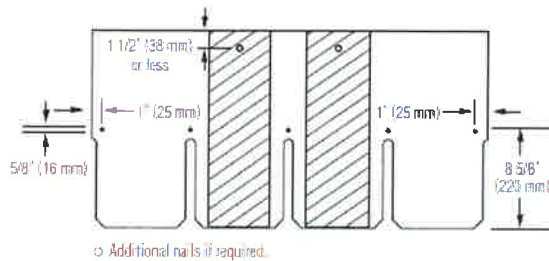

Steep Slope (greater than 21:12):

Use SEVEN nails and EIGHT spots of asphalt roofing cement** for every full Belmont shingle. Apply asphalt roofing cement 1" (25mm) from edge of shingle. See below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

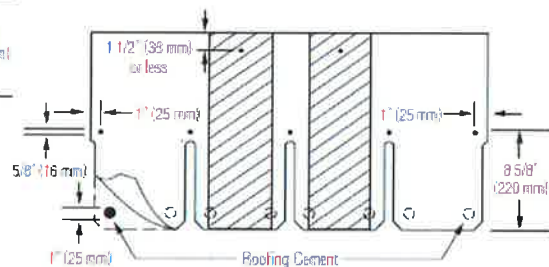

6.10.1 Hip & Ridge for Belmont® or Belmont® IR:

6.10.1.1 Option 1: For Belmont®, refer to instructions herein for Cedar Crest™ or Cedar Crest™ IR hip and ridge shingles. For Belmont® IR, refer to instructions herein for Cedar Crest™ IR hip and ridge shingles.

6.10.1.2 Option 2: For Belmont®: Shangle® Ridge




Figure 17-18: Shangle® Ridge.

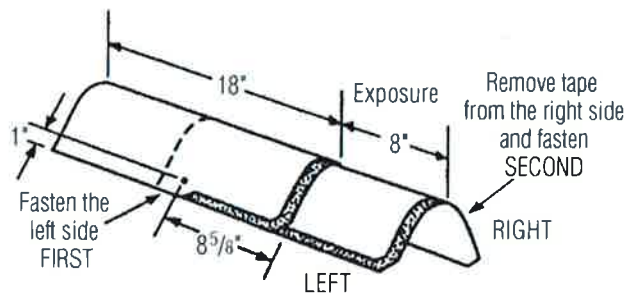


Figure 17-19: Installation of Shangle® Ridge shingles on hips and ridges.

6.10.1.3 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.11 CARRIAGE HOUSE SHANGLE® AND GRAND MANOR SHANGLE®:

LOW AND STANDARD SLOPE

Use five nails for every full Shangle.

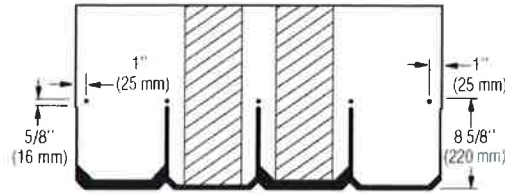


Figure 17-4: Use five nails for every full Grand Manor Shangle, Carriage House Shangle, or Centennial Slate.

STEEP SLOPE

Use seven nails and three spots of asphalt roofing cement for every full Grand Manor Shangle. Use five nails and three spots of asphalt roofing cement for every full Carriage House Shangle and Centennial Slate. Apply asphalt roofing cement 1" (25 mm) from edge of shingle (Figure 17-5). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.


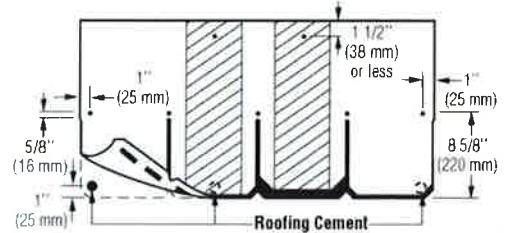



Figure 17-5: When installing Grand Manor Shangles on steep slopes, use seven nails and three spots of asphalt roofing cement.

6.11.1 **Hip & Ridge for Carriage House Shangle® and Grand Manor Shangle:** Refer to instructions herein for Shangle® Ridge hip and ridge shingles

6.12 LANDMARK™, LANDMARK™ IR, LANDMARK™ PRO, LANDMARK™ PRO SOLARIS, LANDMARK™ PREMIUM, LANDMARK™ SOLARIS, LANDMARK™ SOLARIS IR, LANDMARK™ SOLARIS GOLD/PLATINUM OR NORTHGATE:

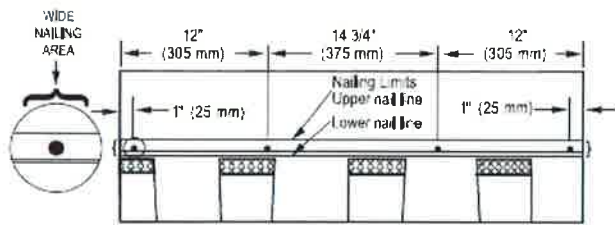

Nailing areas for low and standard slopes (from 2:12 to 21:12)
Nail between upper & lower lines as shown above.

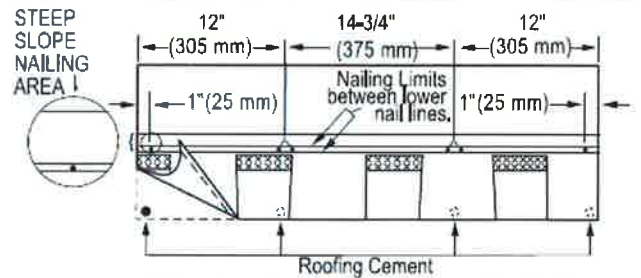

Nailing areas for steep slopes (greater than 21:12) and "Storm-Nailing"
Nail between lower 2 nail lines as shown above.

6.12.1 **Hip & Ridge for Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Pro Solaris, Landmark™ Premium, Landmark™ Solaris, Landmark™ Solaris IR, Landmark™ Solaris Gold/Platinum or NorthGate:**

6.12.1.1 **Option 1: Shadow Ridge™ or NorthGate Accessory**

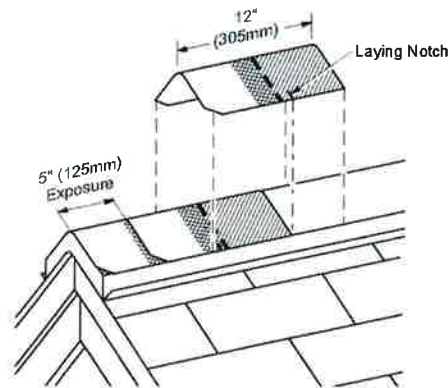
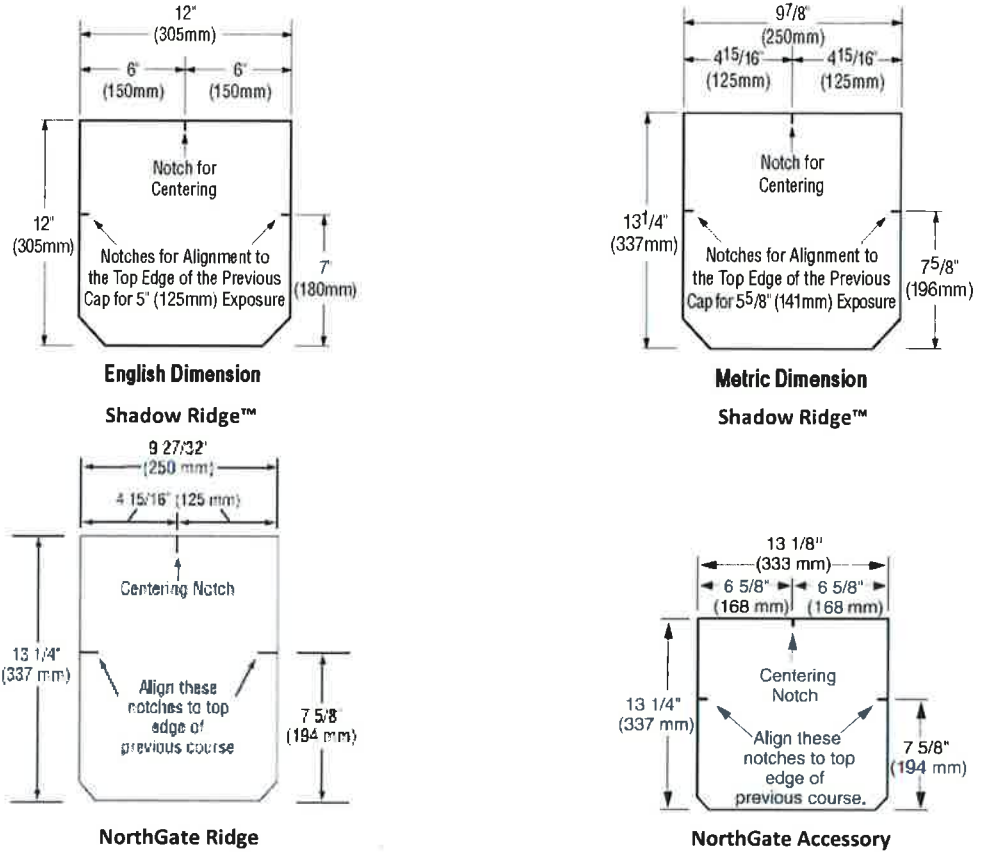


Figure 13-20: Use laying notches to center shingles on hips and ridges, and to locate the correct exposure.

6.12.1.2 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.12.1.3 **Option 2:** Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.

6.13 LANDMARK™ TL:

LANDMARK TL

LANDMARK TL

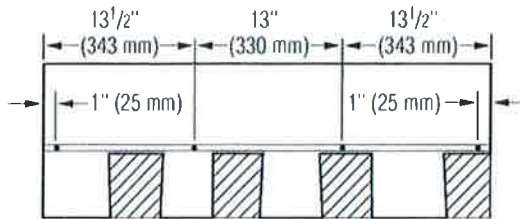


Figure 13-4: Use four nails for every full shingle.

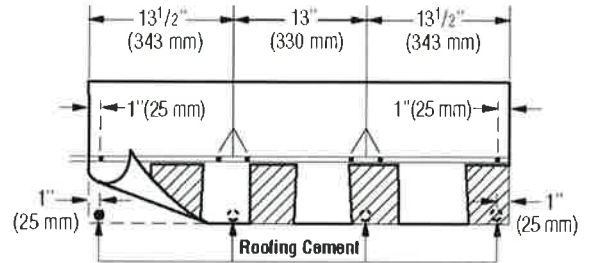


Figure 13-5: Use six nails and four spots of asphalt roofing cement on steep slopes.

6.13.1 Hip & Ridge for Landmark™ TL: Refer to Option 1 or 2 for Landmark™.

6.14 PRESIDENTIAL SHAKE™, PRESIDENTIAL SHAKE™ IR, PRESIDENTIAL SHAKE TL™, PRESIDENTIAL SOLARIS™:

LOW AND STANDARD SLOPE:

For low and standard slopes, use five nails for each full Presidential shingle as shown below.

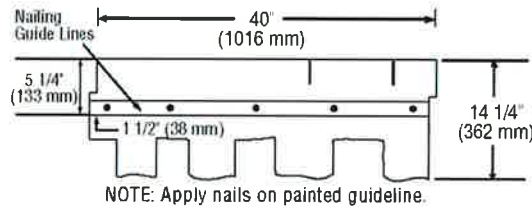


Figure 16-6: Fastening Presidential and Presidential TL Shake shingles on low and standard slopes.

STEEP SLOPE:

For steep slopes, use nine nails for each full Presidential shingle and apply 1" diameter spots of asphalt roofing cement under each shingle tab. After applying 5 nails in between the nailing guide lines, apply 4 nails 1" above tab cutouts making certain tabs of overlying shingle cover nails.

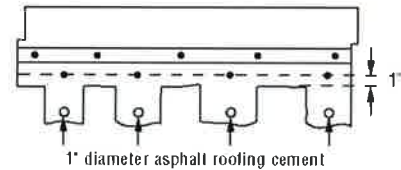


Figure 16-7: Fastening Presidential and Presidential TL Shake shingles on steep slopes.

6.14.1 Hip & Ridge for Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™, Presidential Solaris™:

6.14.1.1 Option 1: Presidential Accessory

PRESIDENTIAL ACCESSORY

Presidential accessory shingles can be used for covering hips and ridges. Apply shingles up to the ridge (expose no more than 7" from the bottom edge of the "tooth." Fasten each accessory with two fasteners. The fasteners must be 1 3/4" long or longer, so they penetrate either 3/4" into the deck or completely through the deck. Presidential accessory comes in two different sizes: Accessory produced in Birmingham, AL is 12" x 12"; Portland, OR produces 9 7/8" x 13 1/4" accessory.

6.14.1.2 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.14.1.3 Option 2: Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.

6.15 HATTERAS™:

LOW, STANDARD AND STEEP SLOPE:

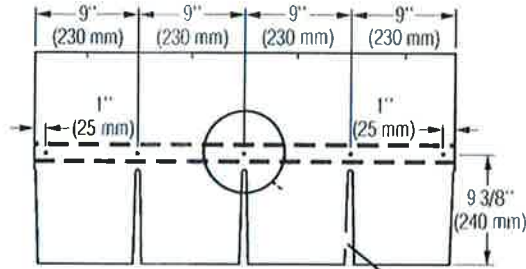


Figure 15-3: Fastening Hatteras Shingles on Low and Standard Slopes

For low and standard slopes, use five nails for each full Hatteras shingle as shown above.

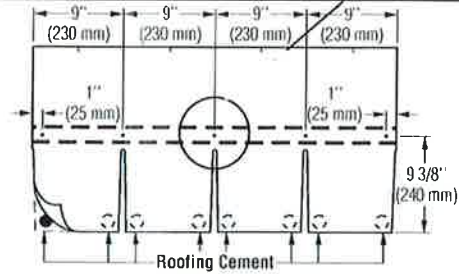


Figure 15-4: Fastening Hatteras Shingles on Steep Slopes

For steep slopes, use five nails and eight spots of asphalt roofing cement for each full Hatteras shingle as shown above. Apply 1" (25mm) diameter spots of roofing cement (ASTM D 4586 Type II suggested) under each tab corner. Press shingle into place; do not expose cement.

CAUTION: Too much roofing cement can cause shingles to blister.

6.15.1 Hip & Ridge for Hatteras™:

6.15.1.1 Option 1: Accessory for Hatteras


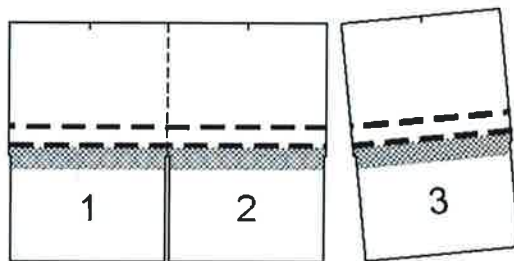


Figure 15-14: 18 three-piece units separate to make 54 Hatteras Accessory shingles.

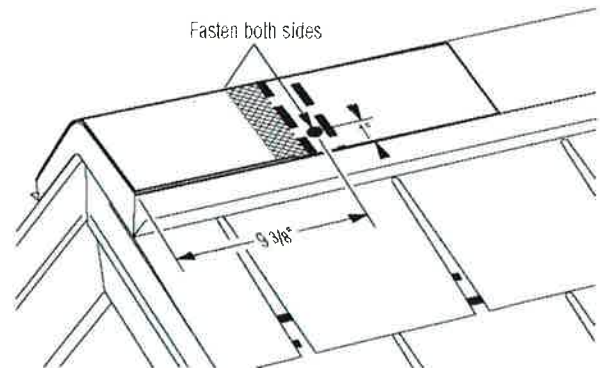

6.15.1.2 Option 2: Cut Hatteras Shingles

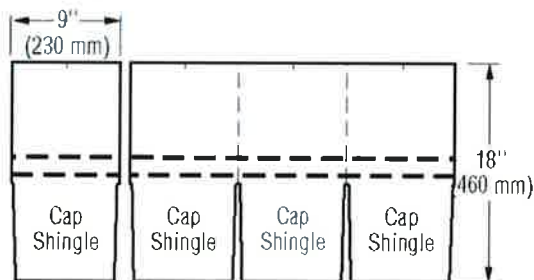


Figure 15-20: Cut Hatteras shingles to make cover cap.

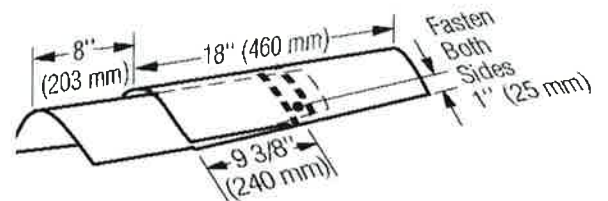


Figure 15-21: Installation of caps along hips and ridges.

6.15.1.3 For **ASTM D3161, Class F** performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.16 HIGHLAND SLATE™, HIGHLAND SLATE™ IR:

LOW AND STANDARD SLOPE:

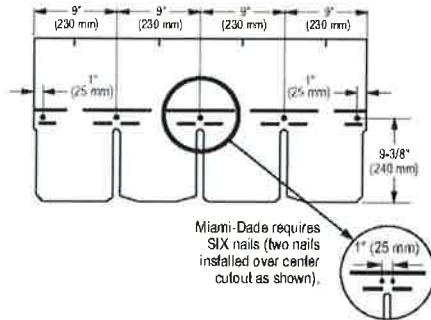


Figure 11-3: Use FIVE nails for every Highland Slate shingle.

STEEP SLOPE:

Use FIVE nails and EIGHT spots of asphalt roofing cement* for each full Highland Slate shingle. For Miami-Dade, SIX nails are required. Apply 1" diameter spots of asphalt roofing cement under each tab corner. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

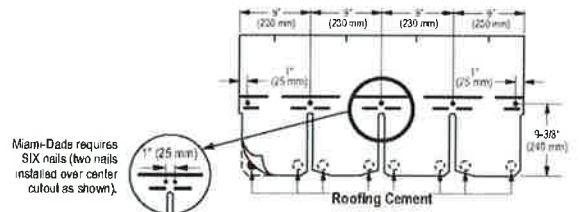


Figure 11-3A: Use FIVE nails and eight spots of asphalt roofing cement under each tab corner.


*CAUTION: Excessive use of roofing cement can cause shingles to blister.

6.16.1 **Hip & Ridge for Highland Slate™, Highland Slate™ IR:** Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR or Shangle Ridge™ hip and ridge shingles.

6.17 PATRIOT™:

LOW AND STANDARD SLOPE


Use FOUR nails for every full shingle located as shown below.

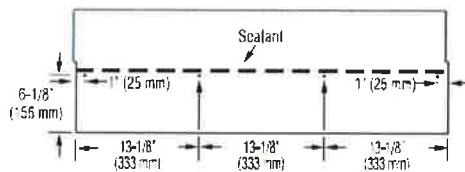

STEEP SLOPE

Use FOUR nails and four spots of asphalt roofing cement for every full shingle as shown below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested. Apply 1" (25 mm) spots of asphalt roofing cement as shown.

CAUTION: Excessive use of roofing cement can cause shingles to blister.

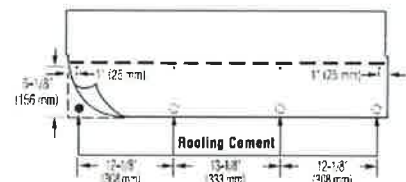

6.17.1 **Hip & Ridge for Patriot™:** Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR, Shadow Ridge™, NorthGate or Shangle Ridge™ hip and ridge shingles.

7. LABELING:

- 7.1 Each unit shall bear a permanent label with the manufacturer's name, logo, city, state and logo of the Accredited Quality Assurance Agency noted herein.
- 7.2 Asphalt shingle wrappers shall indicate compliance with one of the required classifications detailed in **FBC Table 1507.2.7.1 / R905.2.6.1**.

8. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction to properly evaluate the installation of this product.

9. MANUFACTURING PLANTS:

Contact the named QA entity for information on which plants produce products covered by **Florida Rule 61G20-3** QA requirements.

10. QUALITY ASSURANCE ENTITY:

UL LLC – QUA9625; (414) 248-6409; karen.buchmann@us.ul.com

- END OF EVALUATION REPORT -



BCIS Home | Log In | User Registration | Hot Topics | Submit Surcharge | Stats & Facts | Publications | Contact Us | BCIS Site Map | Links | Search



Product Approval
USER: Public User

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

OFFICE OF THE SECRETARY

| | | |
|--|---|-------------|
| FL # | FL15216-R4 | |
| Application Type | Revision | |
| Code Version | 2017 | |
| Application Status | Approved | |
| Comments | Archived <input type="checkbox"/> | |
| Product Manufacturer | Owens Corning Roofing and Asphalt, LLC | |
| Address/Phone/Email | One Owens Corning Parkway Toledo, OH 43645 (740) 321-6345 Greg.Keeler@owenscorning.com | |
| Authorized Signature | Keeler Greg Greg.Keeler@owenscorning.com | |
| Technical Representative | Greg Keeler | |
| Address/Phone/Email | 2790 Columbus Road Granville, OH 43023 (740) 321-6345 greg.keeler@owenscorning.com | |
| Quality Assurance Representative | Address/Phone/Email | |
| Category | Roofing | |
| Subcategory | Underlayments | |
| Compliance Method | Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received | |
| Florida Engineer or Architect Name who developed the Evaluation Report | Robert Nieminen | |
| Florida License | PE-59166 | |
| Quality Assurance Entity | Intertek Testing Services NA, Inc. - QA Entity | |
| Quality Assurance Contract Expiration Date | 12/31/2020 | |
| Validated By | John W. Knezevich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received | |
| Certificate of Independence | FL15216 R4 COI 2018 01 COI NIEMINEN.pdf | |
| Referenced Standard and Year (of Standard) | Standard | Year |
| | ASTM D1970 (tear) | 2015 |
| | ASTM D226 (physicals) | 2009 |
| | TAS 117(B) | 1995 |
| Equivalence of Product Standards Certified By | | |
| Sections from the Code | | |

Product Approval Method Method 1 Option D

Date Submitted 04/20/2018
 Date Validated 04/20/2018
 Date Pending FBC Approval 04/22/2018
 Date Approved 06/12/2018

Summary of Products

| FL # | Model, Number or Name | Description |
|---|-------------------------|--|
| 15216.1 | RhinoRoof Underlayments | Synthetic roof underlayments |
| Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: See ER Section 5 for Limits of Use. | | Installation Instructions FL15216_R4_II_2018_04_FINAL_ER_OWENS CORNING RHINOROOF FL15216-R4.pdf Verified By: Robert Nieminen PE-59166 Created by Independent Third Party: Yes Evaluation Reports FL15216_R4_AE_2018_04_FINAL_ER_OWENS CORNING RHINOROOF FL15216-R4.pdf Created by Independent Third Party: Yes |

[Back](#) [Next](#)

Contact Us :: [2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824](#)

The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida](#). :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275 (1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).



Credit Card
Safe





NEMO|etc.

Certificate of Authorization #32455
353 Christian Street, Unit #13
Oxford, CT 06478
(203) 262-9245

ENGINEER

EVALUATE

TEST

CONSULT

CERTIFY

EVALUATION REPORT

Owens Corning Roofing and Asphalt, LLC
One Owens Corning Parkway
Toledo, OH 43659
(740) 321-6345

Evaluation Report I40510.02.12-R4
FL15216-R4
Date of Issuance: 02/17/2012
Revision 4: 04/19/2018

SCOPE:

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the **6th Edition (2017) Florida Building Code** sections noted herein.

DESCRIPTION: RhinoRoof Underlayments

LABELING: Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein.

CONTINUED COMPLIANCE: This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. of any changes to the product(s), the Quality Assurance or the production facility location(s). NEMO|etc. requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Evaluation Report number preceded by the words "NEMO|etc. Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 3.

Prepared by:

Robert J.M. Nieminen, P.E.
Florida Registration No. 59166, Florida DCA ANE1983



The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 04/19/2018. This does not serve as an electronically signed document.

CERTIFICATION OF INDEPENDENCE:

1. NEMO ETC, LLC does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
2. NEMO ETC, LLC is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
5. This is a building code evaluation. Neither NEMO|etc. nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.

ROOFING COMPONENT EVALUATION:

1. SCOPE:

Product Category: Roofing
Sub-Category: Underlayment

Compliance Statement: RhinoRoof Underlayments, as produced by Owens Corning Roofing and Asphalt, LLC, has demonstrated compliance with the following sections of the 6th Edition (2017) Florida Building Code through testing in accordance with applicable sections of the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

2. STANDARDS:

| <u>Section</u> | <u>Properties</u> | <u>Standard</u> | <u>Year</u> |
|------------------------------|--|-----------------|-------------|
| 1507.1.1, R905.1.1 Exception | Unrolling, Breaking Strength, Pliability | ASTM D226 | 2009 |
| 1507.1.1, R905.1.1 Exception | Tear Strength | ASTM D1970 | 2015 |
| TAS 110 | Pull-through resistance | TAS 117(B) | 1995 |

3. REFERENCES:

| <u>Entity</u> | <u>Examination</u> | <u>Reference</u> | <u>Date</u> |
|---------------|---------------------------|----------------------|-------------|
| ITS (TST1509) | Physical Properties | 100539395COQ-006 | 10/27/2011 |
| ITS (TST1509) | Physical Properties | 100539395COQ-002 | 10/27/2011 |
| ITS (TST1509) | Physical Properties | 100539395COQ-006 | 03/14/2014 |
| PRI (TST5878) | ASTM D1970; Tear strength | OCF-330-02-02 | 10/03/2017 |
| PRI (TST5878) | TAS 117(B); Pull-through | OCF-422-02-01 | 04/03/2018 |
| ITS (QUA1673) | Quality Control | Service Confirmation | 09/30/2017 |

4. PRODUCT DESCRIPTION:

4.1 **RhinoRoof U20** is a multilayered polymer woven coated synthetic roof underlayment available in 42-inch wide rolls, and can be produced in various other sizes; meets FBC 1507.1.1 & R905.1.1 (Exception).

5. LIMITATIONS:

- 5.1 This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in FBC HVHZ jurisdictions.
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory or test report from accredited testing agency for fire ratings of this product.
- 5.4 **RhinoRoof Underlayments** may be used with any prepared roof cover where the product is specifically referenced within FBC approval documents. If not listed, a request may be made to the Authority Having Jurisdiction for approval based on this evaluation combined with supporting data for the prepared roof covering.
- 5.5 **Allowable Roof Covers:**

| TABLE 1: ROOF COVER OPTIONS | | | | | | |
|-----------------------------|-------------------------|---------------------|---------------------|--------------|-----------------------------------|---------------------------------|
| <u>Underlayment</u> | <u>Asphalt Shingles</u> | <u>Nail-On Tile</u> | <u>Foam-On Tile</u> | <u>Metal</u> | <u>Wood Shakes & Shingles</u> | <u>Slate or Simulated Slate</u> |
| RhinoRoof U20 | Yes | No | No | Yes | Yes | No |

5.6 **Exposure Limitations:**
RhinoRoof U20 shall not be left exposed for longer than **30-days** after installation.

6. INSTALLATION:

6.1 **RhinoRoof Underlayments** shall be installed in accordance with **Owens Corning Roofing and Asphalt, LLC** published installation instructions subject to the Limitations set forth in Section 5 herein and the specifics noted below.

6.2 Re-fasten any loose decking panels, and check for protruding nail heads. Sweep the substrate thoroughly to remove any dust and debris prior to application.

6.3 RhinoRoof U20:

6.3.1 Shall be installed in compliance with the requirements for **ASTM D226, Type I or II** underlayment in **FBC Table 1507.1.1 or R905.1.1** for the type of prepared roof covering to be installed, taking into account the wider sheet-width.

6.3.2 Fasteners:

For exposure ≤ 24 hours, corrosion resistant fasteners may be 1-inch roofing nails with a 3/8-inch diameter head, minimum 1-inch diameter plastic or metal cap nails or FBC HVHZ nails & 1-5/8" diameter tin caps (with the rough edge facing up). The use of staples is prohibited.

For exposure > 24 hours up to maximum 30 days, corrosion resistant fasteners shall be minimum 1-inch diameter plastic or metal cap nails or FBC HVHZ nails & 1-5/8" diameter tin caps (with the rough edge facing up). The use of staples is prohibited.

6.3.2.1 Code Reference: The Exception statement in FBC 1507.1.1 and FBC R905.1.1 states: *"...except metal cap nails shall be required where the ultimate design wind speed, V_{ult} , equals or exceeds 150 mph."*

Owens Corning Roofing and Asphalt, LLC has furnished data to permit the use of 1-inch diameter plastic cap nails in lieu of metal cap nails for these applications, when the **RhinoRoof U20** underlayment is installed beneath mechanically fastened prepared roof covers referenced in FBC Table 1507.1.1 or R905.1.1.

6.3.3 Single Layer; Roof Slope $> 4:12$:

End (vertical) laps shall be minimum 6-inches and side (horizontal) laps shall be minimum 4-inches. Refer to Owens Corning Roofing and Asphalt, LLC recommendations for alternate lap configurations and/or the use of sealant under certain conditions.

For exposure ≤ 24 hours, use of every-other fastening location printed on the surface is acceptable. For exposure > 24 hours up to maximum 30-days, use of every fastening location printed on the surface is required.

When batten systems are to be installed atop the underlayment, the underlayment need only be preliminarily attached pending attachment of the battens on the same day. Battens shall not be positioned over cap nails. If this occurs, remove the cap nail and patch the hole in accordance with Owens Corning Roofing and Asphalt, LLC published instructions.

6.3.4 Double Layer; $2:12 < \text{Roof Slope} < 4:12$:

End (vertical) laps shall be minimum 12-inches and side (horizontal) laps shall be minimum half-sheet-width plus 1-inch.

Double layer application; begin by fastening a half-width plus 1-inch starter strip along the eaves. Place a full-width sheet over the starter, completely overlapping the starter course. Continue as noted in 6.3.3, but maintaining minimum half-width plus 1-inch side (horizontal) laps, resulting in a double-layer application.

7. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

8. MANUFACTURING PLANTS:

Qingdao, China

9. QUALITY ASSURANCE ENTITY:

Intertek Testing Services NA Inc. – QUA1673; (608) 836-4400

- END OF EVALUATION REPORT -



**STATE OF FLORIDA
DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION**

**CONSTRUCTION INDUSTRY LICENSING BOARD
2601 BLAIR STONE ROAD
TALLAHASSEE FL 32399-0783**

(850) 487-1395



QUEVEDO, LUIS F
COMPLETE QUALITY ROOFING CO
2875 S. ORANGE AVE
#500-1515
ORLANDO FL 32806

Congratulations! With this license you become one of the nearly one million Floridians licensed by the Department of Business and Professional Regulation. Our professionals and businesses range from architects to yacht brokers, from boxers to barbeque restaurants, and they keep Florida's economy strong.

Every day we work to improve the way we do business in order to serve you better. For information about our services, please log onto www.myfloridalicense.com. There you can find more information about our divisions and the regulations that impact you, subscribe to department newsletters and learn more about the Department's initiatives.

Our mission at the Department is: License Efficiently, Regulate Fairly. We constantly strive to serve you better so that you can serve your customers. Thank you for doing business in Florida, and congratulations on your new license!



**STATE OF FLORIDA
DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION**

CCC1328368 ISSUED: 07/20/2016

**CERTIFIED ROOFING CONTRACTOR
QUEVEDO, LUIS F
COMPLETE QUALITY ROOFING CO**

IS CERTIFIED under the provisions of Ch. 489 FS.
Expiration date : AUG 31, 2018 L160720000944

DETACH HERE

RICK SCOTT, GOVERNOR

KEN LAWSON, SECRETARY

**STATE OF FLORIDA
DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION
CONSTRUCTION INDUSTRY LICENSING BOARD**

| LICENSE NUMBER |
|----------------|
| CCC1328368 |

The ROOFING CONTRACTOR
Named below IS CERTIFIED
Under the provisions of Chapter 489 FS.
Expiration date: AUG 31, 2018



QUEVEDO, LUIS F
COMPLETE QUALITY ROOFING CO
2875 S. ORANGE AVE
#500-1515
ORLANDO FL 32806



ISSUED: 07/20/2016

DISPLAY AS REQUIRED BY LAW

SEQ # L160720000944



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
08/22/2018

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an **ADDITIONAL INSURED**, the policy(ies) must have **ADDITIONAL INSURED** provisions or be endorsed. If **SUBROGATION IS WAIVED**, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

| | | | |
|---|--|---|---------------------|
| PRODUCER Florida Insurance Office, Inc. DBA All Floridian Insurance 1703 N Main Street Suite A Kissimmee FL 34744 | | CONTACT NAME: Monica Valle PHONE (A/C, No, Ext): (407) 350-5988 E-MAIL ADDRESS: monica@allfloridianins.com FAX (A/C, No): (407) 201-8955 | |
| INSURED COMPLETE QUALITY ROOFING CO dba REVILDOR 1731 SANTA MARIA PLACE ORLANDO FL 32806 | | INSURER(S) AFFORDING COVERAGE | |
| | | INSURER A: UNITED SPECIALTY INSURANCE COMPANY | NAIC # 12537 |
| | | INSURER B: PROGRESSIVE AMERICAN INS | 24252 |
| | | INSURER C: AMERICAN INTERSTATE INS CO | 31895 |
| | | INSURER D: | |
| | | INSURER E: | |
| | | INSURER F: | |

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

| INSR LTR | TYPE OF INSURANCE | ADDL INSD | SUBR WVD | POLICY NUMBER | POLICY EFF (MM/DD/YYYY) | POLICY EXP (MM/DD/YYYY) | LIMITS |
|----------|--|-----------|--------------|------------------|-------------------------|-------------------------|--|
| A | <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input checked="" type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC OTHER: | | | DCG06386-00 | 02/01/2018 | 02/01/2019 | EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000 MED EXP (Any one person) \$ 5,000 PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COMP/OP AGG \$ 2,000,000 \$ |
| B | AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> OWNED AUTOS ONLY <input type="checkbox"/> HIRED AUTOS ONLY <input checked="" type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> NON-OWNED AUTOS ONLY | | | 03509059-3 | 02/11/2018 | 02/11/2019 | COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ 100,000 BODILY INJURY (Per accident) \$ 300,000 PROPERTY DAMAGE (Per accident) \$ 50,000 PIP \$0 DED \$ 10,000 |
| | UMBRELLA LIAB EXCESS LIAB DED RETENTION \$ | | | | | | EACH OCCURRENCE \$ AGGREGATE \$ \$ |
| C | WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below | | Y/N Y N/A | AVWCFL2649652017 | 11/17/2017 | 11/17/2018 | <input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER E.L. EACH ACCIDENT \$ 100,000 E.L. DISEASE - EA EMPLOYEE \$ 100,000 E.L. DISEASE - POLICY LIMIT \$ 500,000 |

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
ROOF CONTRACTOR

CERTIFICATE HOLDER CANCELLATION

| | |
|---|---|
| City of Belle Isle 1600 Nela Avenue Belle Isle FL 32809 | SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE |
|---|---|

2017 - 2018



Local Business Tax Receipt

(Formerly known as "Business License " changed per state law HB1269-2006)

Business Name: COMPLETE QUALITY ROOFING CO 2875 S ORANGE AVE SUITE 500-1515 ORLANDO, FL 32806

Business Owner COMPLETE QUALITY ROOFING CO LUIS F QUEVEDO CCC1328368

Business Location 1731 SANTA MARIA PL

NOTICE-THIS TAX RECEIPT ONLY EVIDENCES PAYMENT OF THE LOCAL BUSINESS TAX PURSUANT TO CH.205, FLORIDA STATUTES. IT DOES NOT PERMIT THE HOLDER TO OPERATE IN VIOLATION OF ANY CITY, STATE, OR FEDERAL LAW. CITY PERMITTING MUST BE NOTIFIED OF ANY MATERIAL CHANGE TO THE INFORMATION FOUND HEREIN BELOW. THIS RECEIPT DOES NOT CONSTITUTE AN ENDORSEMENT OR APPROVAL OF THE HOLDER'S SKILL OR COMPETENCY.

Case Number: BUS-0043060

Issued Date: 09/10/2017

Expiration Date: 9/30/2018

Business type(s):

Table with 2 columns: Description, Year. Row: CONTRA 1524 CONTRACTOR DBPR, 2018

#OrlandoUnited

This receipt is official when validated by the Tax Collector.

PAID: \$60.00 0099-00799069 8/23/2017

1731 SANTA MARIA PL (MOBILE) A - ORLANDO, 32806

COMPLETE QUALITY ROOFING QUEVEDO LUIS F 2875 S ORANGE AVE #500-1515 ORLANDO FL 32806

QUEVEDO LUIS F

TOTAL TAX \$60.00 PREVIOUSLY PAID \$60.00 TOTAL DUE \$0.00



5000 BUSINESS OFFICE-ROOF \$30.00 1 EMPLOYEE 5000-1138926 9/30/2018 EXPIRES

Local Business Tax Receipt... This receipt is valid from October 1 through September 30 of receipt year. Delinquent penalty is added October 1.