



# City of Belle Isle Job Site Card **Roof PERMIT** 2018-08-059

**PERMIT MUST BE POSTED ON SITE** - A permit expires in 6 months if approved inspections are not recorded /scheduled within that time frame. You are responsible for scheduling and keeping track of all your inspections -

Permit Number 2018-08-059

Issue Date 8/22/2018

Site Address: 7224 Seminole Dr 32812

Parcel Number: 29-23-30-4389-04-081

Class: Residential

Subdivision:

Description of Work: Re-roof 3900 SQFT - Asphalt Shingles

Issued To: NOLAND'S ROOFING INC.

Business Phone: 407 808-3835

Name: NOLAND, GREGORY SCOTT

Contractor License: CCC057611

Payment Date & Method: 8/31/2018  Picked up by email

Visa  Master Card  Amex  Discover  Check / Money Order # 4973

Schedule Inspections via Email at: [BD scheduling@universalengineering.com](mailto:BD scheduling@universalengineering.com)

**SCHEDULE INSPECTIONS BY 3:00 PM CUT OFF TIME**

**Inspection Results Will Be Sent Out the Following Business Day**

**"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."**

**ROOF                                      INSPECTOR      DATE                      COMMENTS**

<b>NEW ROOFS ONLY</b> Code 700 Deck Nailing, Dry-In, Flashing			
<b>Both new &amp; re-roof</b> Code 710 In - Progress			
<b>Both new &amp; re-roof</b> Code 720 Final			

Inspection requests are to be emailed to [BD scheduling@UniversalEngineering.com](mailto:BD scheduling@UniversalEngineering.com); a confirmation email will be sent back to you upon scheduling.

**Next-Day Inspection requests must be made by 3:00 p.m.**

Please include the following in your request: Permit #, project address, type of inspection, date of the requested inspection, a contact name & a contact phone number. AM or PM may be requested but cannot be guaranteed.



# City of Belle Isle

Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811  
Tel 407-581-8161 \* Fax 407-581-0313 \* [www.universalengineering.com](http://www.universalengineering.com)

RECEIVED  
AUG 22 2018

## APPLICATION FOR ROOFING PERMIT

**WARNING TO OWNER:** YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

DATE OF APPLICATION: 8/21/18 ROOF PERMIT NUMBER 2018-08-059

PLEASE PRINT. The undersigned hereby applies for a permit to make installations as indicated below:

Project Address 7224 Seminole Drive, Belle Isle, FL 32809  32812

Property Owner Shirley Rice Dodson Phone \_\_\_\_\_

Property Owner's Mailing Address 7224 Seminole Drive City Belle Isle

State FL Zip Code 32812 Parcel Id Number: 29-23-30-4389-04-081

REQUIRED! To obtain this information, please visit <http://www.ocpaf.org/Searches/ParcelSearch.aspx>

Class of Building: Old  New  Type of Building: Residential  Commercial  Other   
Type of Work: New Roof  ReRoof

**REQUIRED! Florida Product Approval Form – NOTE: installation instructions must be posted on-site before your first inspection!!**

Please indicate the nature of work by completing the information below:

Roof Square Footage: 3900 Number of Stories: 2 Job Valuation: \$ 10,500- IS = 11,700

Type: Asphalt Shingles  Metal  Modified Bitumen  Other: \_\_\_\_\_

I hereby certify that the above is true and correct to the best of my knowledge and make Application for Permit as outlined above, and if same is granted I agree to conform to all Florida Building Code Regulations and City Ordinances regulating same and in accordance with plans submitted. The issuance of this permit does not grant permission to violate any applicable Town and/or State of Florida codes and/or ordinances. By signing below, I recognize Republic Services is by legal contract the sole authorized provider of garbage, recycling, yard waste, and commercial garbage and construction debris collection and disposal services with the city limits of the City. Contractors, homeowners and commercial businesses may contact Republic Services at 407-293-8000 to setup accounts for Commercial, Construction Roll Off, or other services needed. Rates are fixed by contract and are available at City Hall or from Republic Services. The City enforces the contract through its code enforcement office. Failure to comply will result in a stop work order.

LICENSE HOLDER SIGNATURE Greg Noland LICENSE # CC057611

LICENSE HOLDER NAME Greg Noland COMPANY NAME Nolands Roofing

Street Address 1295 W. Hwy 50

City Clermont State FL Zip Code 34711 Phone Number 407-808-3535

Email Address preferredpermitting@yahoo.com

Zoning Fee	\$ <u>30.-</u>
Building Fee	\$ <u>80.-</u>
Review Fee	\$ <u>0</u>
1% BCAIB Fee	\$ <u>2 mm</u>
1.5% DCA Fee	\$ <u>2 mm</u>
Total Permit Fee	\$ <u>114.-</u>

Building Official: SM Date 8.22.18  
Verified Contractor's Licenses & Insurance are on file \_\_\_\_\_ Date \_\_\_\_\_  
NOCV need all

NOTE: The Building Permit Number is required if the Roof Installation is associated with any construction or alteration where a Building Permit has been issued.

1st 1K 25  
11x5 55  
80

PAID VISA 4973 8.31-18



Permit Number: 2018-08-059  
 Folio/Parcel ID #: 29-23-30-4389-04-081  
 Prepared by: Noland's Roofing  
 Return to: Noland's Roofing, Inc  
1295 W. Hwy 50  
Clermont, FL. 34711

DOCH 20180495058  
 08/20/2018 02:45:54 PM Page 1 of 1  
 Rec Fee: \$10.00  
 Phil Diamond, Comptroller  
 Orange County, FL  
 IP - Ret To: NOLAND S ROOFING INC



**NOTICE OF COMMENCEMENT**

State of Florida, County of Orange  
 The undersigned hereby gives notice that improvement will be made to certain real property, and in accordance with Chapter 713, Florida Statutes, the following information is provided in this Notice of Commencement.

1. **Description of property** (legal description of the property, and street address if available)  
LAKE CONWAY PARK G/138 BEG E BOUND LOT 8 BLK D 26.75 FT SE OF SE COR OF LOT 7 RU
2. **General description of improvement**  
RE-ROOF
3. **Owner information or Lessee information if the Lessee contracted for the improvement**  
 Name Dodson Shirley Rice  
 Address 7224 Seminole Dr Belle Isle, FL 32812-3714  
 Interest in Property OWNER  
 Name and address of fee simple titleholder (if different from Owner listed above)  
 Name N/A  
 Address \_\_\_\_\_
4. **Contractor**  
 Name Noland's Roofing, Inc./Greg Noland Telephone Number 352-242-4322  
 Address 1295 W Hwy 50 Clermont, FL. 34711
5. **Surety** (if applicable, a copy of the payment bond is attached)  
 Name N/A Telephone Number \_\_\_\_\_  
 Address \_\_\_\_\_ Amount of Bond \$ \_\_\_\_\_
6. **Lender**  
 Name N/A Telephone Number \_\_\_\_\_  
 Address \_\_\_\_\_
7. **Persons within the State of Florida designated by Owner upon whom notices or other documents may be served as provided by §713.13(1)(a)7, Florida Statutes.**  
 Name N/A Telephone Number \_\_\_\_\_  
 Address \_\_\_\_\_
8. **In addition to himself or herself, Owner designates the following to receive a copy of the Lienor's Notice as provided in §713.13(1)(b), Florida Statutes.**  
 Name N/A Telephone Number \_\_\_\_\_  
 Address \_\_\_\_\_
9. **Expiration date of notice of commencement** (the expiration date may not be before the completion of construction and final payment to the contractor, but will be 1 year from the date of recording unless a different date is specified)  
 \_\_\_\_\_



State of Florida, County of Orange  
 I hereby certify that this is a true copy of the document as reflected in the Official Records  
 PHIL DIAMOND, COUNTY COMPTROLLER  
 BY: [Signature] D.C.  
 DATED: 8/20/18

**WARNING TO OWNER: ANY PAYMENTS MADE BY THE OWNER AFTER THE EXPIRATION OF THE NOTICE OF COMMENCEMENT ARE CONSIDERED IMPROPER PAYMENTS UNDER CHAPTER 713, PART I, SECTION 713.13, FLORIDA STATUTES, AND CAN RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE COMMENCING WORK OR RECORDING YOUR NOTICE OF COMMENCEMENT.**

Shirley Rice Dodson Signature of Owner or Lessee, or Owner's or Lessee's Authorized Officer/Director/Partner/Manager  
Owner Signatory's Title/Office

The foregoing instrument was acknowledged before me this 20 day of 8 / 18 by Shirley Dodson  
 as owner for self  
 Type of authority, e.g., officer, trustee, attorney in fact Name of party on behalf of whom instrument was executed

Catherine Pagliazzo Signature of Notary Public - State of Florida  
 \_\_\_\_\_ Print, type, or stamp commissioned name of Notary Public

Personally Known \_\_\_\_\_ OR Produced ID   
 Type of ID Produced a

CATHERINE PAGLIAZZO  
 NOTARY PUBLIC  
 STATE OF FLORIDA  
 Comm# GC071247  
 Expires 2/3/2021



**CITY OF BELLE ISLE, FLORIDA**  
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811  
Tel 407-581-8161 \* Fax 407-581-0313 \* [www.universalengineering.com](http://www.universalengineering.com)

**POWER OF ATTORNEY**

Date: 8/21/18

Permit #: 2018-08-059

I hereby name and appoint Margaret Ciaykowski-Wendzel of  
(print name)  
Preferred Permitting  
(company name) to be my lawful attorney-in-fact to act for

me and apply to the City of Belle Isle Building Department for a roof permit  
(type of permit)

for work to be performed at the following location:

7224 Jeminole Drive, Belle Isle, FL  32809  32812 and  
(street address)

to sign my name and do all things necessary to this appointment.

Certified Contractor's Printed Name: Greg Roland

License Number: CC05764

Certified Contractor's Signature: Greg Roland

.....  
The foregoing instrument was acknowledged before me this 21 days of August of 2018  
by Greg Roland who is personally known to me or who produced  
as identification and who did not take an oath.

State of Florida  
County of Orange

Catherine Pagliazzo  
Notary Public, Orange County, Florida

(seal)



CATHERINE PAGLIAZZO  
NOTARY PUBLIC  
STATE OF FLORIDA  
Comm# GG071247  
Expires 2/8/2021



**City of Belle Isle**  
 Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811  
 Tel 407-581-8161 \* Fax 407-581-0313 \* [www.universalengineering.com](http://www.universalengineering.com)

## Product Approval Form

DATE: 8/21/18 PERMIT # 2018-08-059  
 PROJECT ADDRESS 7224 Seminole Drive, Belle Isle, FL 32809 ✓ 32812

As required by Florida Statue 553.842 and Florida Administrative Code 9B-72m, please provide the information and approval numbers of the building components listed below if they will be utilized on the building or structure. FL Approved products are listed online at [www.floridabuilding.org](http://www.floridabuilding.org) or can be obtained from the local product supplier. The following information must be turned in with permit application and available onsite for inspections:

• **NOTE:** The installation instructions must be posted on-site before your first inspection!!

Product Type	Manufacturer	Model/Series	FL Product Approval #	Product Type	Manufacturer	Model/Series	FL Product Approval #
<b>EXTERIOR DOORS</b>				<b>WALL PANELS</b>			
Swinging				Sliding			
Sliding				Soffits			
Sectional/Rollup				Storefront			
Other				Glass Block			
				Other			
<b>WINDOWS</b>				<b>ROOFING PRODUCTS</b>			
Single/Dbf Hung				Asphalt Shingles	Certain Teed Shingles	FL 5554	RLB
Horizontal Slider				Non Struct Metal			
Casement				Roofing Tiles			
Fixed				Single Ply Roof			
Mullion				Underlayment	Certain Teed underlayment	FL 1288	
Skylights				Other			RLB
Other							
<b>STRUCTURAL COMPONENTS</b>				<b>OTHER</b>			
Wood Connectors							
Wood Anchors							
Truss Plates							
Insulation Forms							
Lintels							
Other							

It is the applicant's responsibility to verify that specific products have been installed in accordance with their limitations and with the minimum required design pressures for the structure. Specific compliance will be verified during field inspections.

**Applicant Signature** Shrey Malhotra **Date** 8/21/18






BCIS Home | Log In | User Registration | Hot Topics | Submit Surcharge | Stats & Facts | Publications | FBC Staff | BCIS Site Map | Links | Search



**Product Approval**  
USER: Public User

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > [Application Detail](#)



FL #	FL5444-R12								
Application Type	Revision								
Code Version	2017								
Application Status	Approved								
Comments									
Archived	<input type="checkbox"/>								
Product Manufacturer	CertainTeed Corporation-Roofing								
Address/Phone/Email	20 Moores Road Malvern, PA 19355 (610) 893-5400 mark.d.harner@saint-gobain.com								
Authorized Signature	Mark Harner mark.d.harner@saint-gobain.com								
Technical Representative	Mark D. Harner								
Address/Phone/Email	18 Moores Road Malvern, PA 19355 (610) 651-5847 Mark.D.Harner@saint-gobain.com								
Quality Assurance Representative									
Address/Phone/Email									
Category	Roofing								
Subcategory	Asphalt Shingles								
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received								
Florida Engineer or Architect Name who developed the Evaluation Report	Robert Nieminen								
Florida License	PE-59166								
Quality Assurance Entity	UL LLC								
Quality Assurance Contract Expiration Date	03/09/2020								
Validated By	John W. Knezevich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received								
Certificate of Independence	<a href="#">FL5444_R12_COI_2017_01_COI_Nieminen.pdf</a>								
Referenced Standard and Year (of Standard)	<table border="0"> <thead> <tr> <th><b>Standard</b></th> <th><b>Year</b></th> </tr> </thead> <tbody> <tr> <td>ASTM D3161</td> <td>2016</td> </tr> <tr> <td>ASTM D3462</td> <td>2010</td> </tr> <tr> <td>ASTM D7158</td> <td>2011</td> </tr> </tbody> </table>	<b>Standard</b>	<b>Year</b>	ASTM D3161	2016	ASTM D3462	2010	ASTM D7158	2011
<b>Standard</b>	<b>Year</b>								
ASTM D3161	2016								
ASTM D3462	2010								
ASTM D7158	2011								
Equivalence of Product Standards Certified By									
Sections from the Code									

Product Approval Method	Method 1 Option D
Date Submitted	09/07/2017
Date Validated	09/12/2017
Date Pending FBC Approval	09/15/2017
Date Approved	12/12/2017
Date Revised	01/24/2018

**Summary of Products**

FL #	Model, Number or Name	Description
5444.1	CertainTeed Asphalt Roof Shingles	3-tab, 4-tab, strip (no-cut-outs), laminated and architectural asphalt roof shingles
<b>Limits of Use</b> Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: Refer to ER Section 5 for Limits of Use		<b>Installation Instructions</b> <a href="#">FL5444 R12 II 2017 09 FINAL ER CERTAINTEED ASPHALT SHINGLES FL5444-R12.pdf</a> Verified By: Robert Nieminen, PE PE-59166 Created by Independent Third Party: Yes <b>Evaluation Reports</b> <a href="#">FL5444 R12 AE 2017 09 FINAL ER CERTAINTEED ASPHALT SHINGLES FL5444-R12.pdf</a> Created by Independent Third Party: Yes

[Back](#) [Next](#)

Contact Us :: [2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824](#)

The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida](#), :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. \*Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).



Credit Card  
**Safe**





**EXTERIOR RESEARCH & DESIGN, LLC.**

*Certificate of Authorization #9503*  
353 CHRISTIAN STREET, UNIT #13  
OXFORD, CT 06478  
(203) 262-9245

**EVALUATION REPORT**

**CertainTeed Corporation**

20 Moores Road  
Malvern, PA 19355  
**(610) 651-5847**

**Evaluation Report 3532.09.05-R13**

**FL5444-R12**

**Date of Issuance: 09/22/2005**

**Revision 13: 09/05/2017**

**SCOPE:**

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the **6<sup>th</sup> Edition (2017) Florida Building Code** sections noted herein.

**DESCRIPTION: CertainTeed Asphalt Roof Shingles.**

**LABELING:** Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein and **FBC 1507.2.7.1 / R905.2.6.1**

**CONTINUED COMPLIANCE:** This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. if the product changes or the referenced Quality Assurance documentation changes. Trinity|ERD requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.


**ADVERTISEMENT:** The Evaluation Report number preceded by the words "Trinity|ERD Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

**INSPECTION:** Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 12.

**Prepared by:**

**Robert J.M. Nieminen, P.E.**  
*Florida Registration No. 59166, Florida DCA ANE1983*



The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 09/05/2017. This does not serve as an electronically signed document.

**CERTIFICATION OF INDEPENDENCE:**

1. Trinity|ERD does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
2. Trinity|ERD is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
5. This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.



**ROOFING SYSTEMS EVALUATION:**

**1. SCOPE:**

**Product Category:** Roofing

**Sub-Category:** Asphalt Shingles

**Compliance Statement:** CertainTeed Asphalt Roof Shingles, as produced by CertainTeed Corporation, have demonstrated compliance with the following sections of the 6<sup>th</sup> Edition (2017) Florida Building Code and 6<sup>th</sup> Edition (2017) Florida Building Code, Residential Volume through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

**2. STANDARDS:**

<u>Section</u>	<u>Property</u>	<u>Standard</u>	<u>Year</u>
1507.2.5, R905.2.4	Physical Properties	ASTM D3462	2010
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D3161	2016
1507.2.7.1, R905.2.6.1	Wind Resistance	ASTM D7158	2011

**3. REFERENCES:**

<u>Entity</u>	<u>Examination</u>	<u>Reference</u>	<u>Date</u>
UL (TST 1740)	ASTM D3161	94NK9632	05/15/1998
UL (TST 1740)	ASTM D3161	99NK26506	11/23/1999
UL (TST 1740)	ASTM D3161	03CA12702	05/27/2003
UL (TST 1740)	ASTM D3161	03CA12702	06/16/2003
UL (TST 1740)	ASTM D3161	03NK29847	10/03/2003
UL (TST 1740)	ASTM D3161	04CA11329	05/24/2004
UL (TST 1740)	ASTM D3161	04CA32986	12/03/2004
UL (TST 1740)	ASTM D3161	05NK07049	04/15/2005
UL (TST 1740)	ASTM D3161	05NK16778	05/12/2005
UL (TST 1740)	ASTM D3161	05CA16778	05/12/2005
UL (TST 1740)	ASTM D3161	05NK14836	05/22/2005
UL (TST 1740)	ASTM D3161	05NK22800	06/22/2005
UL (TST 1740)	ASTM D3462	R684	09/21/2005
UL (TST 1740)	ASTM D7158	05NK08037	06/28/2006
UL (TST 1740)	ASTM D3161 & D3462	09CA28873	07/23/2009
UL (TST 1740)	ASTM D3462	10CA41303	10/07/2010
UL (TST 1740)	ASTM D3161	10CA41303	10/08/2010
UL (TST 1740)	ASTM D7158	10CA41303	10/27/2010
UL (TST 1740)	ASTM D3161 & D3462	10CA44960	11/11/2010
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	13CA32897	11/21/2013
UL LLC (TST 9628)	ASTM D3161, D3462	TFWZ.R684	04/22/2014
UL LLC (TST 9628)	ASTM D7158	TGAH.R684	04/22/2014
UL LLC (TST 9628)	ASTM D3161 & D3462	4786334434	09/16/2014
UL LLC (TST 9628)	ASTM D3161 & D3462	4786570826	02/12/2015
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4786570717	12/16/2015
UL LLC (TST 9628)	ASTM D3161 & D3462	4787195678	02/09/2016
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787380356	10/26/2016
UL LLC (TST 9628)	ASTM D3462	4787380357	10/13/2016
UL LLC (TST 9628)	ASTM D7158	4787380357	11/08/2016
UL LLC (TST 9628)	ASTM D3161	4787380357	11/09/2016
UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787586427	01/25/2017
UL LLC (QUA 9625)	Quality Control	Service Confirmation	Exp. 03/09/2020

#### 4. PRODUCT DESCRIPTION:

- 4.1 **CT20™, XT™ 25, XT™ 30 and XT™ 30 IR** are fiberglass reinforced, 3-tab asphalt roof shingles.
- 4.2 **Arcadia™, Belmont®, Belmont® IR, Carriage House Shingle®, Grand Manor Shingle®, Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris and Landmark™ Solaris IR** are fiberglass reinforced, laminated asphalt roof shingles.
- 4.3 **NorthGate™** is a fiberglass reinforced, laminated, SBS modified bitumen roof shingle.
- 4.4 **Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™ and Presidential Solaris™** are fiberglass reinforced, architectural asphalt roof shingles.
- 4.5 **Hatteras™, Highland Slate™ and Highland Slate™ IR** are fiberglass reinforced, 4-tab asphalt roof shingles.
- 4.6 **Patriot™** is a fiberglass reinforced asphalt roof strip-shingle (with no cut-outs) providing a laminated appearance through an intermittent shadow line with contrasting blend drops for color definition.
- 4.7 **Presidential Accessory, Accessory for Hatteras, Shangle Ridge™, Shadow Ridge™, Cedar Crest™, Cedar Crest™ IR, NorthGate Ridge and NorthGate Accessory** are fiberglass reinforced accessory shingles for hip and ridge installation.
- 4.8 Any of the above listed shingles may be produced in AR (algae resistant) versions.

#### 5. LIMITATIONS:

- 5.1 This is a building code evaluation. Neither Trinity|ERD nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use within FBC HVHZ jurisdictions.
- 5.3 Fire Classification is not part of this Evaluation Report; refer to current Approved Roofing Materials Directory for fire ratings of this product.
- 5.4 **Wind Classification:**
  - 5.4.1 All shingles noted herein are Classified in accordance with **FBC Tables 1507.2.7.1 and R905.2.6.1 to ASTM D3161, Class F and/or ASTM D7158, Class H**, indicating the shingles are acceptable for use in all wind zones up to  $V_{asd} = 150$  mph ( $V_{ult} = 194$  mph). Refer to Section 6 for installation requirements to meet this wind rating.
  - 5.4.2 Presidential Accessory, Accessory for Hatteras, Shangle Ridge, Shadow Ridge, Cedar Crest, NorthGate Ridge and NorthGate Accessory hip & ridge shingles have been evaluated in accordance with **ASTM D3161, Class F. All except NorthGate Ridge and NorthGate Accessory require use of BASF Sonolastic NP 1 adhesive or Henkel PL® Polyurethane Roof & Flashing Sealant, applied as specified in manufacturer's application instructions, for use in wind zones up to  $V_{asd} = 150$  mph ( $V_{ult} = 194$  mph).**
  - 5.4.3 Classification by **ASTM D7158** applies to **exposure category B or C** and a **building height of 60 feet or less**. Calculations by a qualified design professional are required for conditions outside these limitations. Contact the shingle manufacturer for data specific to each shingle.
    - 5.4.3.1 **Analysis in accordance with ASTM D7158** indicates the measured uplift resistance ( $R_T$ ) for the CertainTeed asphalt Roof shingles listed in Section 4.1 through 4.6 (*except Presidential Solaris™*) exceeds the calculated uplift force ( $F_T$ ) at a maximum design wind speed of  $V_{asd} = 150$  mph ( $V_{ult} = 194$  mph) for **residential buildings** located in **Exposure D conditions with no topographical variations (flat terrain)** having a **mean roof height less than or equal to 60 feet**. The shingles are permissible under Code for installation in these conditions using the installation procedures detailed in this Evaluation Report and CertainTeed minimum requirements, subject to minimum codified fastening requirements established within any local jurisdiction, which shall take precedence.
- 5.5 All products in the roof assembly shall have quality assurance audits in accordance with **F.A.C. Rule 61G20-3**.


**6. INSTALLATION:**

- 6.1 Roof deck, slope, underlayment and fasteners shall comply with **FBC 1507.2 / R905.2** and the shingle manufacturer's minimum requirements.
- 6.1.1 Underlayment shall be acceptable to **CertainTeed Corporation** and shall hold current Florida Statewide Product Approval, or be Locally Approved per **Rule 61G20-3**, per **FBC Sections 1507.2.3, 1507.2.4 or R905.2.3**.
- 6.2 Installation of asphalt shingles shall comply with the **CertainTeed Corporation** current published instructions, using minimum four (4) nails per shingle in accordance with **FBC 1507.2.7 or Section R905.2.6** and the minimum requirements herein.
- 6.2.1 Fasteners shall be in accordance with manufacturer's published requirements, but not less than **FBC 1507.2.6 or R905.2.5**. Staples are not permitted.
- 6.2.2 Where the roof slope exceeds 21 units vertical in 12 units horizontal, use the "Steep Slope" directions.
- 6.3 CertainTeed asphalt shingles are acceptable for use in reroof (tear-off) or recover applications, subject to the limitations set forth in **FBC Section 1511 or R908** and CertainTeed published installation instructions.

**CT20™, XT™ 25, XT™ 30, XT™ 30 IR:**

**LOW AND STANDARD SLOPE**

**ENGLISH**

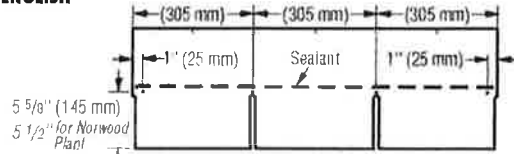

**METRIC**


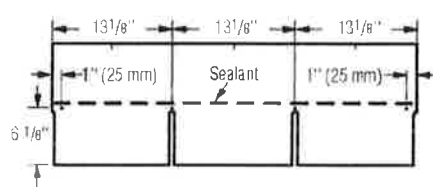


Figure 11-3: Use **four nails** for every full shingle.

**STEEP SLOPE**

Use **four** nails and six spots of asphalt roofing cement\* for every full shingle (Figure 11-4). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

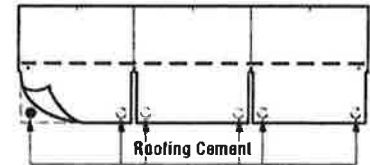

Apply 1" (25 mm) spots of asphalt roofing cement under each tab corner.

Figure 11-4: Use **four nails** and six spots of asphalt cement on steep slopes.

**\*CAUTION:** Excessive use of roofing cement can cause shingles to blister.

**6.4.1 Hip & Ridge for CT20™, XT™ 25, XT™ 30, XT™ 30 IR: Cut Shingles**

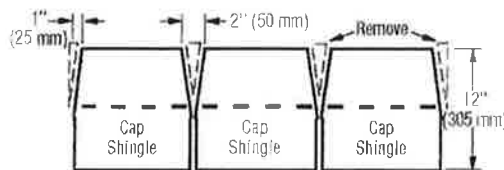


Figure 11-24: Cut tabs, then trim back to make cap shingles (English dimensions shown).

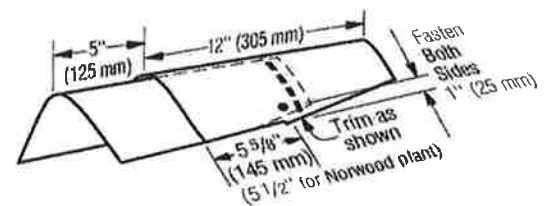


Figure 11-25: Installation of caps along the hips and ridges.

- 6.4.1.1 For **ASTM D3161, Class F** performance use **BASF "Sonolastic® NP1™"** adhesive or **Henkel "PL® Polyurethane Roof & Flashing Sealant"**, in accordance with CertainTeed requirements.

6.5

**ARCADIA™:**

**LOW AND STANDARD SLOPE**

Use SIX nails for every full shingle located as shown below.

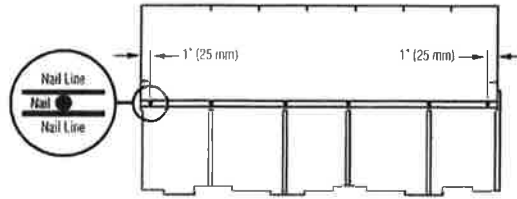


Figure 2: Use six nails for every full shingle.

**STEEP SLOPE**

Use SIX nails and FOUR spots of asphalt roofing cement for every full shingle as shown below. Apply asphalt roofing cement 1" (25 mm) from edge of shingle. Asphalt roofing cement meeting ASTM D 4586 Type II is suggested.

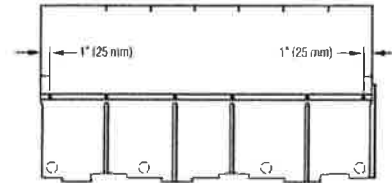




Figure 3: Use six nails and four spots of asphalt roofing cement on steep slopes.

6.5.1

**Hip & Ridge for Arcadia™: Cedar Crest™, Cedar Crest™ IR**

Use two (2), minimum 1¼-inch long fasteners per shingle. For the starter shingle, place fastener 1-inch from each side edge and about 2-inch up from the starter shingle's exposed butt edge, ensuring minimum ¼-inch embedment into the deck, or full penetration through the deck. For each full Cedar Crest shingle, place fasteners 8-5/8-inch up from its exposed butt edge and 1-inch from each side edge.

For **ASTM D3161, Class F** performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements, to **hand-seal Cedar Crest shingles**. Apply NP 1 or PL adhesive from the middle of the shingle's raised overlap on the top piece and extending approximately 4-inch along the sides of the headlap along a line ¾ to 1-inch from each side of the shingle's headlap. Immediately align and apply the overlying shingle, gently pressing tab sides into the adhesive, and install nails. To secure the other side, apply a 1-inch diameter spot of NP 1 or PL adhesive between the shingle layers.

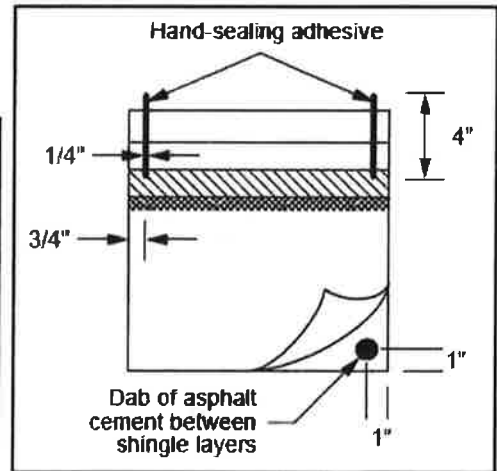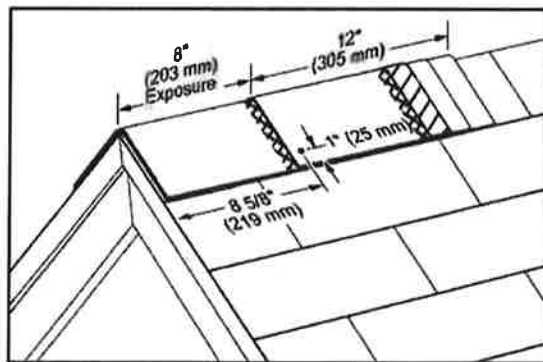




6.6

**BELMONT® OR BELMONT® IR:**


**Low and Standard Slope  
(2:12 to 21:12):**

Use FIVE nails for every full Belmont shingle, located as shown below.

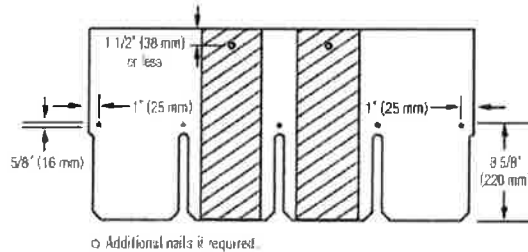

**Steep Slope (greater than 21:12):**

Use SEVEN nails and EIGHT spots of asphalt roofing cement™ for every full Belmont shingle. Apply asphalt roofing cement 1" (25mm) from edge of shingle. See below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

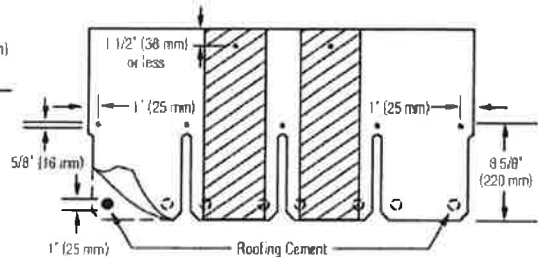

6.6.1 **Hip & Ridge for Belmont® or Belmont® IR:**

6.6.1.1 **Option 1:** For Belmont®, refer to instructions herein for Cedar Crest™ or Cedar Crest™ IR hip and ridge shingles. For Belmont® IR, refer to instructions herein for Cedar Crest™ IR hip and ridge shingles.

6.6.1.2 **Option 2:** For Belmont®: Shangle® Ridge




Figure 17-18: Shangle® Ridge.

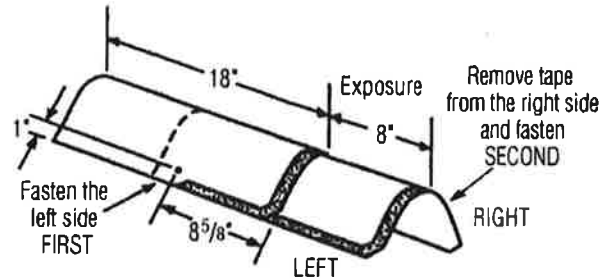


Figure 17-19: Installation of Shangle® Ridge shingles on hips and ridges.

6.6.1.3 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.7

**CARRIAGE HOUSE SHANGLE® AND GRAND MANOR SHANGLE®:**

**LOW AND STANDARD SLOPE**

Use five nails for every full Shingle.

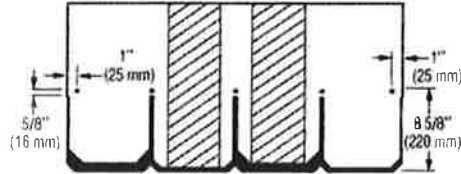


Figure 17-4: Use five nails for every full Grand Manor Shingle, Carriage House Shingle, or Centennial Slate.

**STEEP SLOPE**

Use seven nails and three spots of asphalt roofing cement for every full Grand Manor Shingle. Use five nails and three spots of asphalt roofing cement for every full Carriage House Shingle and Centennial Slate. Apply asphalt roofing cement 1" (25 mm) from edge of shingle (Figure 17-5). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

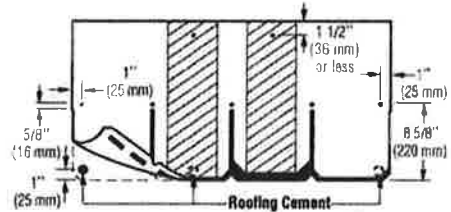


Figure 17-5: When installing Grand Manor Shingles on steep slopes, use seven nails and three spots of asphalt roofing cement.

6.7.1


**Hip & Ridge for Carriage House Shingle® and Grand Manor Shingle:** Refer to instructions herein for Shangle® Ridge hip and ridge shingles

6.8

**LANDMARK™, LANDMARK™ IR, LANDMARK™ PRO, LANDMARK™ PREMIUM, LANDMARK™ TL, LANDMARK™ SOLARIS, LANDMARK™ SOLARIS IR, NORTHGATE:**

**LOW AND STANDARD SLOPE**

**METRIC DIMENSIONS**

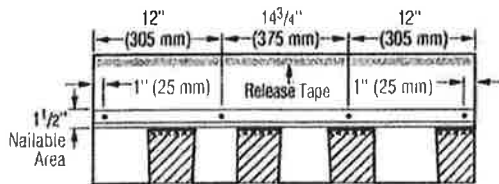

**LANDMARK TL**


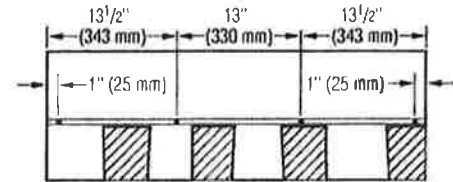


Figure 13-4: Use four nails for every full shingle.

**NorthGate:**

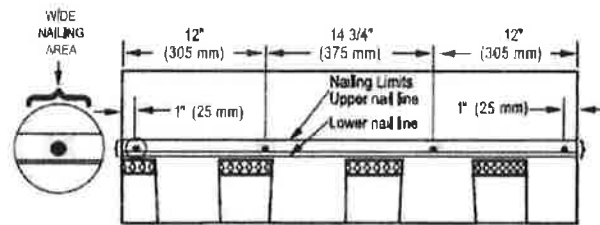


Nailing area for low and standard slopes (from 2:12 to 21:12)  
Nail between upper & lower lines as shown above.

**STEEP SLOPE**

Use six nails and four spots of asphalt roofing cement for every full laminated shingle. See below. Asphalt roofing cement should meet ASTM D4586 Type II. Apply 1" spots of asphalt roofing cement under each corner and at about 12" to 13" in from each edge.

**METRIC DIMENSIONS**

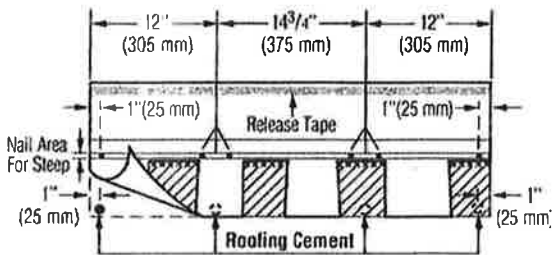

**LANDMARK TL**


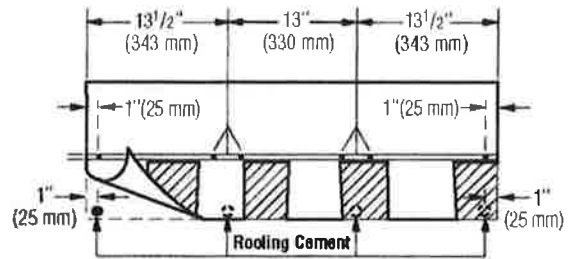



Figure 13-5: Use six nails and four spots of asphalt roofing cement on steep slopes.

**NorthGate:**

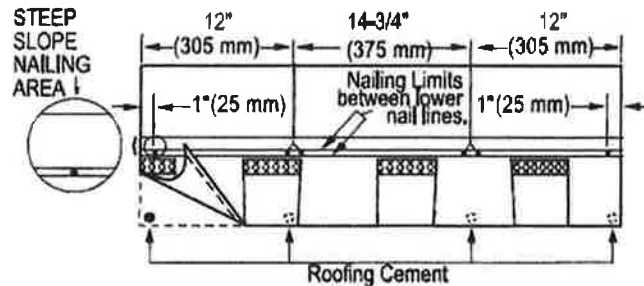


Nailing areas for steep slopes (greater than 21:12) and "Storm-Nailing"  
Nail between lower 2 nail lines as shown above.

- 6.8.1 **Hip & Ridge for Landmark™, Landmark™ IR, Landmark™ Pro, Landmark™ Premium, Landmark™ TL, Landmark™ Solaris, Landmark™ Solaris IR, NorthGate:**
- 6.8.1.1 **Option 1: Shadow Ridge™ or NothGate Accessory**



**English Dimension**  
**Shadow Ridge™**

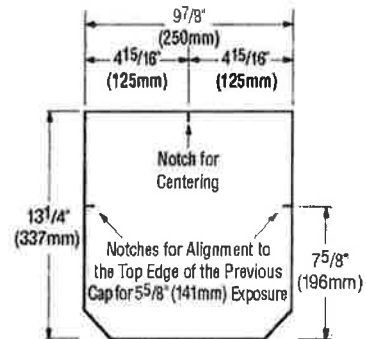

**Metric Dimension**  
**Shadow Ridge™**


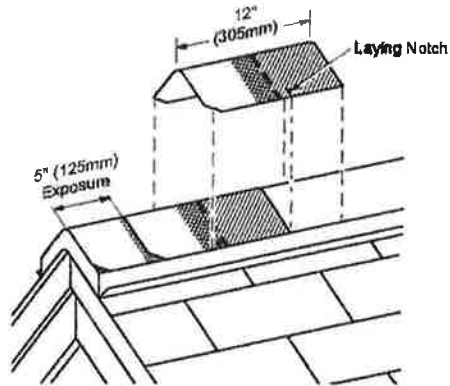


Figure 13-20: Use laying notches to center shingles on hips and ridges, and to locate the correct exposure.

- 6.8.1.2 For ASTM D3161, Class F performance use BASF “Sonolastic® NP1™” adhesive or Henkel “PL® Polyurethane Roof & Flashing Sealant”, in accordance with CertainTeed requirements.
- 6.8.1.3 **Option 2:** Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.

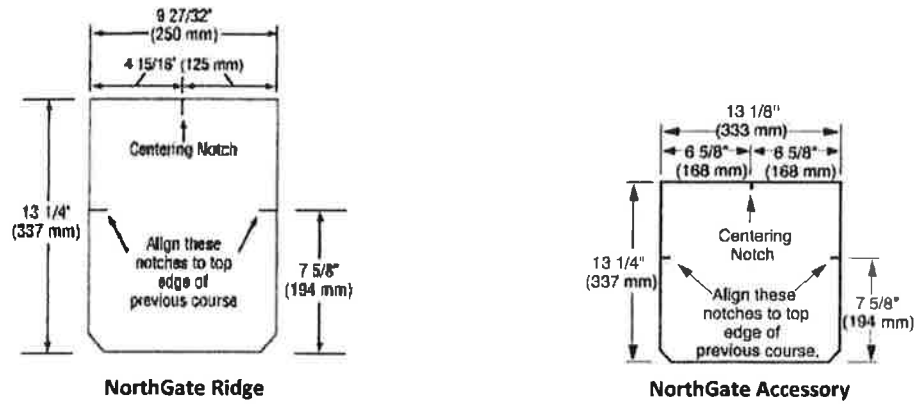

**6.9 PRESIDENTIAL SHAKE™, PRESIDENTIAL SHAKE™ IR, PRESIDENTIAL SHAKE TL™, PRESIDENTIAL SOLARIS™:**

**LOW AND STANDARD SLOPE:**

For low and standard slopes, use five nails for each full Presidential shingle as shown below.

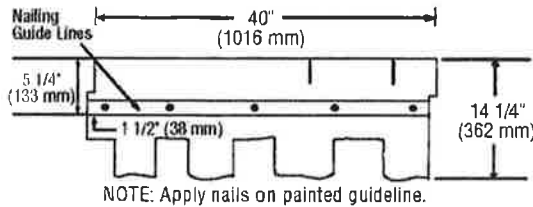


Figure 16-6: Fastening Presidential and Presidential TL Shake shingles on low and standard slopes.

**STEEP SLOPE:**

For steep slopes, use nine nails for each full Presidential shingle and apply 1" diameter spots of asphalt roofing cement under each shingle tab. After applying 5 nails in between the nailing guide lines, apply 4 nails 1" above tab cutouts making certain tabs of overlying shingle cover nails.

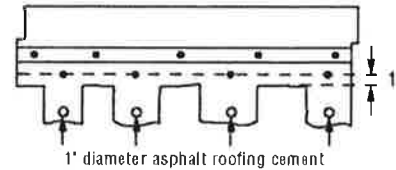


Figure 16-7: Fastening Presidential and Presidential TL Shake shingles on steep slopes.

**6.9.1 Hip & Ridge for Presidential Shake™, Presidential Shake™ IR, Presidential Shake TL™, Presidential Solaris™:**

**6.9.1.1 Option 1: Presidential Accessory**

**PRESIDENTIAL ACCESSORY**

Presidential accessory shingles can be used for covering hips and ridges. Apply shingles up to the ridge (expose no more than 7" from the bottom edge of the "tooth." Fasten each accessory with two fasteners. The fasteners must be 1 3/4" long or longer, so they penetrate either 3/4" into the deck or completely through the deck. Presidential accessory comes in two different sizes: Accessory produced in Birmingham, AL is 12" x 12"; Portland, OR produces 9 7/8" x 13 1/4" accessory.

6.9.1.2 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.9.1.3 **Option 2:** Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR hip and ridge shingles.

**6.10 HATTERAS™:**

**LOW, STANDARD AND STEEP SLOPE:**

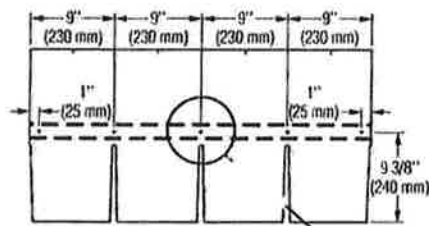


Figure 15-3: Fastening Hatteras Shingles on Low and Standard Slopes

For low and standard slopes, use five nails for each full Hatteras shingle as shown above.

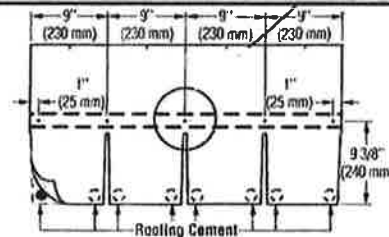


Figure 15-1: Fastening Hatteras Shingles on Steep Slopes

For steep slopes, use five nails and eight spots of asphalt roofing cement for each full Hatteras shingle as shown above. Apply 1" (25mm) diameter spots of roofing cement (ASTM D 4586 Type II suggested) under each tab corner. Press shingle into place; do not expose cement.

**CAUTION:** Too much roofing cement can cause shingles to blister.

6.10.1 **Hip & Ridge for Hatteras™:**

6.10.1.1 **Option 1:** Accessory for Hatteras


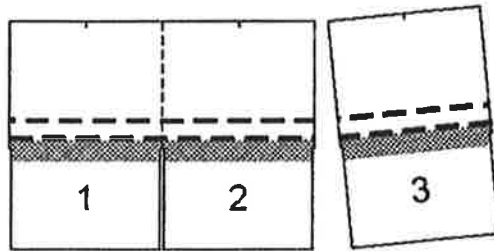


Figure 15-14: 18 three-piece units separate to make 54 Hatteras Accessory shingles.

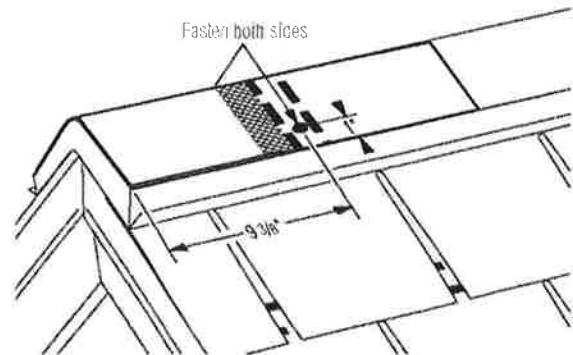

6.10.1.2 **Option 2:** Cut Hatteras Shingles

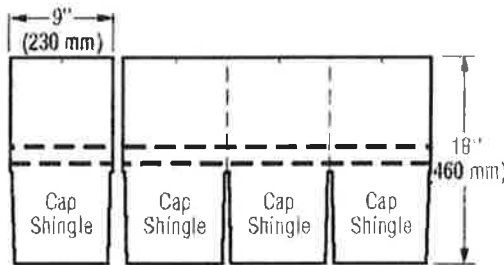


Figure 15-20: Cut Hatteras shingles to make cover cap.

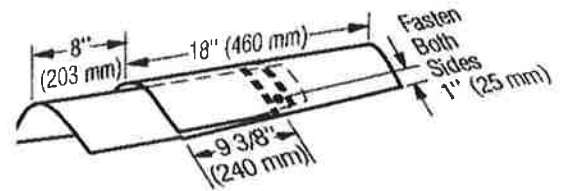


Figure 15-21: Installation of caps along hips and ridges.

6.10.1.3 For ASTM D3161, Class F performance use BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant", in accordance with CertainTeed requirements.

6.11 **HIGHLAND SLATE™, HIGHLAND SLATE™ IR:**

**LOW AND STANDARD SLOPE:**

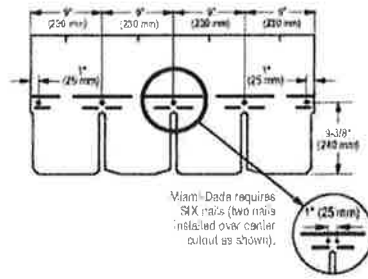


Figure 11-3: Use FIVE nails for every Highland Slate shingle.

**STEEP SLOPE:**

Use FIVE nails and EIGHT spots of asphalt roofing cement\* for each full Highland Slate shingle. For Miami-Dade, SIX nails are required. Apply 1" diameter spots of asphalt roofing cement under each tab corner. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

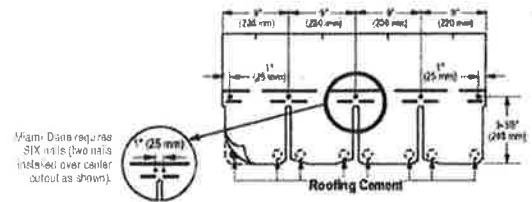


Figure 11-3A: Use FIVE nails and eight spots of asphalt roofing cement under each tab corner.

\*CAUTION: Excessive use of roofing cement can cause shingles to blister.


6.11.1 **Hip & Ridge for Highland Slate™, Highland Slate™ IR:** Refer to instructions herein for Cedar Crest™, Cedar Crest™ IR or Shangle Ridge™ hip and ridge shingles.

**6.12**

**PATRIOT™:**

**LOW AND STANDARD SLOPE**


Use FOUR nails for every full shingle located as shown below.

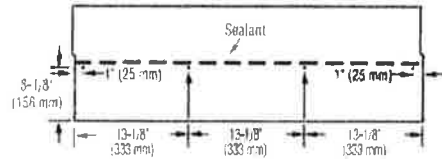

**STEEP SLOPE**

Use FOUR nails and four spots of asphalt roofing cement for every full shingle as shown below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested. Apply 1" (25 mm) spots of asphalt roofing cement as shown.

**CAUTION:** Excessive use of roofing cement can cause shingles to blister.

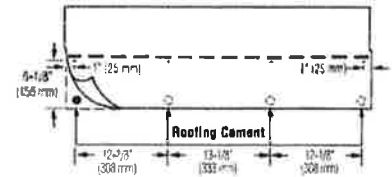

6.12.1 **Hip & Ridge for Patriot™:** Refer to instructions herein for **Cedar Crest™**, **Cedar Crest™ IR**, **Shadow Ridge™**, **NorthGate** or **Shangle Ridge™** hip and ridge shingles.

**7. LABELING:**

- 7.1 Each unit shall bear a permanent label with the manufacturer's name, logo, city, state and logo of the Accredited Quality Assurance Agency noted herein.
- 7.2 Asphalt shingle wrappers shall indicate compliance with one of the required classifications detailed in **FBC Table 1507.2.7.1 / R905.2.6.1**.

**8. BUILDING PERMIT REQUIREMENTS:**

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

**9. MANUFACTURING PLANTS:**

Contact the named QA entity for information on which plants produce products covered by **Florida Rule 61G20-3 QA** requirements.

**10. QUALITY ASSURANCE ENTITY:**

UL LLC – QUA9625; (414) 248-6409; karen.buchmann@us.ul.com

**- END OF EVALUATION REPORT -**



[BCIS Home](#) | [Log In](#) | [User Registration](#) | [Hot Topics](#) | [Submit Surcharge](#) | [Stats & Facts](#) | [Publications](#) | [Contact Us](#) | [BCIS Site Map](#) | [Links](#) | [Search](#)



**Product Approval**  
USER: Public User

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

OFFICE OF THE SECRETARY

FL #	FL11288-R17																								
Application Type	Revision																								
Code Version	2017																								
Application Status	Approved																								
Comments																									
Archived	<input type="checkbox"/>																								
Product Manufacturer	CertainTeed Corporation-Roofing																								
Address/Phone/Email	20 Moores Road Malvern, PA 19355 (610) 893-5400 mark.d.harner@saint-gobain.com																								
Authorized Signature	Mark Harner mark.d.harner@saint-gobain.com																								
Technical Representative	Mark D. Harner																								
Address/Phone/Email	18 Moores Road Malvern, PA 19355 (610) 651-5847 Mark.D.Harner@saint-gobain.com																								
Quality Assurance Representative																									
Address/Phone/Email																									
Category	Roofing																								
Subcategory	Underlayments																								
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received																								
Florida Engineer or Architect Name who developed the Evaluation Report	Robert Nieminen																								
Florida License	PE-59166																								
Quality Assurance Entity	UL LLC																								
Quality Assurance Contract Expiration Date	03/09/2020																								
Validated By	John W. Knezevich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received																								
Certificate of Independence	<a href="#">FL11288 R17 COI 2018 01 COI NIEMINEN.pdf</a>																								
Referenced Standard and Year (of Standard)	<table border="0"> <thead> <tr> <th><b>Standard</b></th> <th><b>Year</b></th> </tr> </thead> <tbody> <tr><td>ASTM D1970</td><td>2015</td></tr> <tr><td>ASTM D226</td><td>2009</td></tr> <tr><td>ASTM D4601</td><td>2012</td></tr> <tr><td>ASTM D4798</td><td>2011</td></tr> <tr><td>ASTM D4869</td><td>2016</td></tr> <tr><td>ASTM D6163</td><td>2008</td></tr> <tr><td>ASTM D6164</td><td>2011</td></tr> <tr><td>ASTM D6222</td><td>2011</td></tr> <tr><td>ASTM D6757</td><td>2016</td></tr> <tr><td>FM 4474</td><td>2011</td></tr> <tr><td>FRSA/TRI April 2012 (04-12)</td><td>2012</td></tr> </tbody> </table>	<b>Standard</b>	<b>Year</b>	ASTM D1970	2015	ASTM D226	2009	ASTM D4601	2012	ASTM D4798	2011	ASTM D4869	2016	ASTM D6163	2008	ASTM D6164	2011	ASTM D6222	2011	ASTM D6757	2016	FM 4474	2011	FRSA/TRI April 2012 (04-12)	2012
<b>Standard</b>	<b>Year</b>																								
ASTM D1970	2015																								
ASTM D226	2009																								
ASTM D4601	2012																								
ASTM D4798	2011																								
ASTM D4869	2016																								
ASTM D6163	2008																								
ASTM D6164	2011																								
ASTM D6222	2011																								
ASTM D6757	2016																								
FM 4474	2011																								
FRSA/TRI April 2012 (04-12)	2012																								



Equivalence of Product Standards  
Certified By

Sections from the Code

Product Approval Method Method 1 Option D

Date Submitted 01/24/2018  
Date Validated 01/29/2018  
Date Pending FBC Approval 01/30/2018  
Date Approved 04/10/2018

**Summary of Products**

FL #	Model, Number or Name	Description
11288.1	CertainTeed Roof Underlayments	Roof underlayments for use below Approved prepared roof coverings.
<b>Limits of Use</b> <b>Approved for use in HVHZ:</b> No <b>Approved for use outside HVHZ:</b> Yes <b>Impact Resistant:</b> N/A <b>Design Pressure:</b> +N/A/-555.0 <b>Other:</b> 1.) The DP in this application pertains to a particular application for use in adhesive-set tile applications. DP is N/A for underlayments installed beneath mechanically attached prepared roof covers. 2.) Refer to ER Section 5 for other Limits of Use.		<b>Installation Instructions</b> <a href="#">FL11288 R17 II 2018 01 FINAL ER CERTAINTEED UNDERLAYMENTS FL11288-R17.pdf</a> Verified By: Robert Nieminen PE-59166 Created by Independent Third Party: Yes <b>Evaluation Reports</b> <a href="#">FL11288 R17 AE 2018 01 FINAL ER CERTAINTEED UNDERLAYMENTS FL11288-R17.pdf</a> Created by Independent Third Party: Yes

[Back](#) [Next](#)

Contact Us :: [2601 Blair Stone Road, Tallahassee FL 32399](#) Phone: 850-487-1824

The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida](#), :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. \*Pursuant to Section 455.275 (1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).



Credit Card  
**Safe**





**NEMO|etc.**

Certificate of Authorization #32455  
353 Christian Street, Unit #13  
Oxford, CT 06478  
(203) 262-9245

**ENGINEER**

**EVALUATE**

**TEST**

**CONSULT**

**CERTIFY**

**EVALUATION REPORT**

**CertainTeed Corporation**  
20 Moores Road  
Malvern, PA 19355  
**(610) 651-5847**

**Evaluation Report 11610.09.08-R18**  
**FL11288-R17**  
**Date of Issuance: 09/03/2009**  
**Revision 18: 01/24/2018**

**SCOPE:**

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code and Florida Building Code, Residential Volume. The products described herein have been evaluated for compliance with the **6<sup>th</sup> Edition (2017) Florida Building Code** sections noted herein.

**DESCRIPTION: CertainTeed Roof Underlayments**

**LABELING:** Labeling shall be in accordance with the requirements the Accredited Quality Assurance Agency noted herein.

**CONTINUED COMPLIANCE:** This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance documentation changes, or provisions of the Code that relate to the product change. Acceptance of this Evaluation Report by the named client constitutes agreement to notify Robert Nieminen, P.E. of any changes to the product(s), the Quality Assurance or the production facility location(s). NEMO|etc. requires a complete review of this Evaluation Report relative to updated Code requirements with each Code Cycle.

**ADVERTISEMENT:** The Evaluation Report number preceded by the words "NEMO|etc. Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

**INSPECTION:** Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 10.

**Prepared by:**

**Robert J.M. Nieminen, P.E.**  
*Florida Registration No. 59166, Florida DCA ANE1983*



The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 01/24/2018. This does not serve as an electronically signed document.

**CERTIFICATION OF INDEPENDENCE:**

1. NEMO ETC, LLC does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
2. NEMO ETC, LLC is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
5. This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.

**ROOFING COMPONENT EVALUATION:**

**1. SCOPE:**

**Product Category:** Roofing

**Sub-Category:** Underlayment

**Compliance Statement:** CertainTeed Roof Underlayments, as produced by CertainTeed Corporation, have demonstrated compliance with the following sections of the 6<sup>th</sup> Edition (2017) Florida Building Code through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

**2. STANDARDS:**

<u>Section</u>	<u>Property</u>	<u>Standard</u>	<u>Year</u>
1504.3.1	Wind Uplift	FM 4474	2011
1507.2.3 / 1507.1.1	Physical Properties	ASTM D226	2009
1507.2.3 / 1507.1.1	Physical Properties	ASTM D4869	2016
1507.2.3 / 1507.1.1	Physical Properties	ASTM D6757	2016
1507.3.3	Physical properties	FRSA/TRI April 2012 (04-12)	2012
1507.2.4 / 1507.1.1, 1507.2.9.2	Physical Properties	ASTM D1970	2015
1507.10.2	Physical Properties	ASTM D4601	2012
1507.11.2	Physical Properties	ASTM D6163	2008
1507.11.2	Physical Properties	ASTM D6164	2011
1507.11.2	Physical Properties	ASTM D6222	2011
TAS 110	Accelerated Weathering	ASTM D4798	2011

**3. REFERENCES:**

<u>Entity</u>	<u>Examination</u>	<u>Reference</u>	<u>Date</u>
ERD (TST6049)	Physical Properties	C7290.01.08	01/16/2008
ERD (TST6049)	Physical Properties	C8440.04.08	04/28/2008
ERD (TST6049)	Physical Properties	C9560.05.08	05/25/2008
ERD (TST6049)	Physical Properties	C10080.09.08-R1	04/17/2009
ERD (TST6049)	Physical Properties	C12960.06.09	06/02/2009
ERD (TST6049)	Physical Properties	3530.12.05-1-R1	10/05/2009
ERD (TST6049)	Wind Uplift	C8370.08.08-R1	10/05/2009
ERD (TST6049)	Physical Properties	3523.03.05-R2	01/12/2010
ERD (TST6049)	Physical Properties	C30890.03.10-1	03/17/2010
ERD (TST6049)	Physical Properties	C3500.04.10	04/07/2010
ERD (TST6049)	Physical Properties	C31840.05.10	05/10/2010
ERD (TST6049)	Physical Properties	C31860.05.10	05/18/2010
ERD (TST6049)	Physical Properties	C31850.06.10	06/25/2010
ERD (TST6049)	Physical Properties	C35460.05.11	06/16/2011
ERD (TST6049)	Physical Properties	C34940.09.11-R1	10/04/2011
ERD (TST6049)	Accelerated Weathering	C40840SC	06/11/2012
ERD (TST6049)	Physical Properties	C40050.09.12-2	09/28/2012
ERD (TST6049)	Wind Uplift	C39670.08.12	08/20/2012
ERD (TST6049)	Physical Properties	C31410.10.10-R1	11/02/2012
ERD (TST6049)	Physical Properties	C45240.01.14-1	01/15/2014
ERD (TST6049)	Physical Properties	C32930.01.11-R2	01/20/2014
ERD (TST6049)	Physical Properties	C45240.01.14-2	01/24/2014
ERD (TST6049)	FM 4470	CTR-SC9920.01.16-R1	01/20/2016
ERD (TST6049)	Wind Uplift	CTR-SC10420.01.16	01/25/2016
ERD (TST6049)	FRSA/TRI April 2012, Tile Slippage	CTR-SC11415.11.16	11/28/2016
MTI (TST 2508)	Physical Properties	DX08C4A	03/22/2004
MTI (TST 2508)	Physical Properties	TX14B6A-001	02/27/2006
MTI (TST 2508)	Physical Properties	TX14B6B-002	03/13/2006
MTI (TST 2508)	Physical Properties	TX14B6F-006	03/13/2006
MTI (TST 2508)	Physical Properties	TX14B6E-005	03/13/2006
PRI (TST5878)	Physical Properties	CTC-034-02-01	11/24/2008
PRI (TST5878)	Physical Properties	CTC-075-02-01	02/15/2011
PRI (TST5878)	Physical Properties	CTC-067-02-01	08/08/2011
PRI (TST5878)	Wind Uplift	CTC-112-02-01	12/12/2011
PRI (TST5878)	Physical Properties	CTC-163-02-01 (x3)	05/10/2013
PRI (TST5878)	Physical Properties	CTC-189-02-01	11/18/2013



**Entity**  
PRI (TST5878)  
UL, LLC. (QUA9625)

**Examination**  
Physical Properties  
Quality Control

**Reference**  
CTC-327-02-01  
Service Confirmation

**Date**  
06/28/2017  
Exp. 03/09/2020

#### 4. PRODUCT DESCRIPTION:

##### 4.1 **Self-Adhering Underlayments:**

4.1.1 **WinterGuard™ HT** is a glass scrim reinforced, self-adhering, film-surfaced waterproofing underlayment; meets ASTM D1970.

4.1.2 **WinterGuard™ Sand** is a glass mat reinforced, self-adhering, sand-surfaced waterproofing underlayment; meets ASTM D1970.

4.1.3 **WinterGuard™ Granular** is a glass mat reinforced, self-adhering, granule-surfaced waterproofing underlayment; meets ASTM D1970.

4.1.4 **MetaLayment™** is a self-adhering, film-surfaced, waterproofing underlayment; meets ASTM D1970.

4.1.5 **Black Diamond Base Sheet** is a self-adhering, glass mat reinforced, fine-mineral surfaced, SBS modified roof underlayment; meets ASTM D1970.

4.1.6 **Flintlastic SA PlyBase** is a self-adhering, glass mat reinforced, film-surfaced, SBS modified roof underlayment for use as a base-layer in multi-ply underlayment systems; meets ASTM D1970.

4.1.7 **Flintlastic SA Mid Ply** is a self-adhering, polyester reinforced, film-surfaced, SBS modified roof underlayment for use as a base-layer in multi-ply underlayment systems; meets ASTM D6163, Type I, Grade S.

4.1.8 **Flintlastic Ultra Glass SA** is a self-adhering, glass mat reinforced, fine-mineral surfaced, SBS modified roof underlayment for use as a base-layer in multi-ply underlayment systems; meets ASTM D6163, Type I, Grade S.

4.1.9 **Flintlastic SA Cap FR** is a self-adhering, glass mat reinforced, granule-mineral surfaced, SBS modified roof underlayment; meets ASTM D6163, Type I, Grade G.

4.1.10 **Flintlastic SA Cap** is a self-adhering, polyester reinforced, granule-mineral surfaced, SBS modified roof underlayment; meets ASTM D1970, ASTM D6164, Type I, Grade G and FRSA/TRI April 2012.

##### 4.2 **Torch Applied Underlayments:**

4.2.1 **Flintlastic GTA** is a torch-applied, polyester reinforced, granule-surfaced, APP modified roof underlayment; meets ASTM D6222, Type I, Grade G.

##### 4.3 **Asphalt Applied Underlayments:**

4.3.1 **Flintlastic GMS** is an asphalt-applied, polyester reinforced, granule-surfaced, SBS modified roof underlayment; meets ASTM D6164, Type I, Grade G.

##### 4.4 **Mechanically Attached Underlayments:**

4.4.1 **Flintlastic SA NailBase** is a glass mat reinforced, film-surfaced, SBS modified roof underlayment for use as a mechanically attached base-layer in multi-ply underlayment systems; meets ASTM D4601, Type II.

4.4.2 **Roofers' Select** is an asphalt-impregnated, organic felt reinforced with glass fibers roof underlayment; meets ASTM D6757.



**5. LIMITATIONS:**

- 5.1 This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in **FBC HVHZ** jurisdictions.
- 5.3 Fire Classification is not part of this Laboratory Report; refer to current Approved Roofing Materials Directory or test report from accredited testing agency for fire ratings of this product.
- 5.4 **CertainTeed Roof Underlayments** may be used with any prepared roof cover where the product is specifically referenced within FBC approval documents. If not listed, a request may be made to the Authority Having Jurisdiction (AHJ) for approval based on this evaluation combined with supporting data for the prepared roof covering.
- 5.5 Allowable Roof Covers:

TABLE 1: ROOF COVER OPTIONS							
Underlayment	Asphalt Shingles	Nail-On Tile	Foam-On Tile	Mortar-Set Tile	Metal	Wood Shakes & Shingles	Slate
Roofers' Select	Yes	No	No	No	No	No	No
WinterGuard HT	Yes	No	No	No	Yes	Yes	Yes
WinterGuard Sand or Granular	Yes	No	No	No	No	Yes	Yes
Black Diamond Base	Yes	No	No	No	No	Yes	Yes
Flintlastic SA Cap	Yes	Yes	Yes <i>See 5.5.1</i>	Yes	No	Yes	Yes
Flintlastic SA Cap FR	No	No	No	No	No	Yes	Yes
MetaLayment	Yes	No	No	No	Yes	Yes	Yes
Flintlastic GTA	No	Yes	Yes <i>See 5.5.1</i>	Yes	No	Yes	Yes
Flintlastic GMS	No	Yes	Yes <i>See 5.5.1</i>	Yes	No	Yes	Yes

- 5.5.1 "Foam-On Tile" is limited to use of the following Approved tile adhesives / underlayment combinations.

TABLE 1A: ALLOWABLE TILE ADHESIVE / UNDERLAYMENT COMBINATIONS <sup>1</sup>		
Adhesive	Florida Product Approval	Underlayments
Dow TileBond™	FL22525	Flintlastic SA Cap or Flintlastic GMS
ICP Adhesives Polyset® AH-160	FL6332	Flintlastic SA Cap, Flintlastic GTA or Flintlastic GMS

<sup>1</sup> Refer to Tile Manufacturer's or Adhesive Manufacturer's Florida Product Approval for Overturning Moment Resistance Performance.

5.6 Allowable Substrates:

5.6.1 Direct-Bond to Deck:

WinterGuard HT, WinterGuard Sand, WinterGuard Granular or MetaLayment self-adhered to:

- New or existing plywood
- FlintPrime or ASTM D41 primed new or existing plywood.

Black Diamond Base, Flintlastic SA PlyBase, Flintlastic SA Mid Ply, Flintlastic Ultra Glass SA, Flintlastic SA Cap or Flintlastic SA Cap FR self-adhered to:

- New or existing plywood;
- FlintPrime, FlintPrime SA or ASTM D41 primed new or existing plywood;
- FlintPrime, FlintPrime SA or ASTM D41 primed structural concrete.

Flintlastic GMS in hot asphalt to:

- FlintPrime or ASTM D41 primed structural concrete.

Flintlastic GTA torch-applied to:

- FlintPrime or ASTM D41 primed structural concrete.

5.6.2 Bond to Mechanically Attached Base Sheet or Adhered Base Ply:

- WinterGuard HT, WinterGuard Sand, WinterGuard Granular or MetaLayment self-adhered to: ASTM D226, Type I or II felt.
- Black Diamond Base Sheet, Flintlastic SA PlyBase, Flintlastic SA Mid Ply, Flintlastic Ultra Glass SA, Flintlastic SA Cap, Flintlastic SA Cap FR self-adhered to: Flintlastic SA NailBase or ASTM D226, Type I or II felt.
- Flintlastic SA Cap or Flintlastic SA Cap FR self-adhered to: Flintlastic SA PlyBase or Flintlastic SA MidPly.
- Flintlastic GMS in hot asphalt to: ASTM D226, Type I or II felt, ASTM D4601, Type II base sheet, Black Diamond Base Sheet or Flintlastic Ultra Glass SA.
- Flintlastic GTA torch-applied to: ASTM D226, Type I or II felt, ASTM D4601, Type II base sheet, Black Diamond Base Sheet or Flintlastic Ultra Glass SA.

5.6.3 Wind Resistance for Underlayment Systems in Foam-On Tile Applications:

**FRSA/TRI April 2012 (04-12)** does not address wind uplift resistance of all underlayment systems beneath foam-on or mortar-set tile systems, where the underlayment forms part of the load-path. The following wind uplift limitations apply to underlayment systems that are not addressed in **FRSA/TRI April 2012 (04-12)** and are used in foam-on or mortar-set tile applications. Maximum Design Pressure is the result of testing for wind load resistance based on allowable wind loads, and reflects the ultimate passing pressure divided by 2 (the 2 to 1 margin of safety per **FBC 1504.9** has already been applied). Refer to **FRSA/TRI April 2012 (04-12), Appendix A, Table 1A** or **FBC 1609** for determination of design wind loads.

#1 Maximum Design Pressure = -240 psf:

Deck: Structural concrete to meet project requirements to satisfaction of AHJ.  
 Primer: FlintPrime or ASTM D41.  
 Base Sheet: Black Diamond Base Sheet or Flintlastic Ultra Glass SA, self-adhered.  
 Underlayment: Flintlastic GTA, torch-applied or Flintlastic GMS, applied in hot asphalt.

#2 Maximum Design Pressure = -555 psf:

Deck: Structural concrete to meet project requirements to satisfaction of AHJ.  
 Primer: FlintPrime, FlintPrime SA or ASTM D41.  
 Base: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.

- #3 Maximum Design Pressure = -105.0 psf:**  
 Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Primer: (Optional) FlintPrime, FlintPrime SA or ASTM D41  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.
- #4 Maximum Design Pressure = -127.5 psf:**  
 Deck: Min. 19/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Primer: FlintPrime, FlintPrime SA or ASTM D41  
 Joints: Min. 4-inch wide strips of Flintlastic SA PlyBase, self-adhered over all plywood joints.  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.
- #5 Maximum Design Pressure = -37.5 psf:**  
 Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: ASTM D226, Type II felt or Flintlastic SA NailBase  
 Fasteners: 12 ga., 1¼-inch long galvanized ring shank nails through 32 ga., 1 5/8-inch diameter tin caps  
 Spacing: 6-inch o.c. at the 4-inch laps and 12-inch o.c. at two (2) equally spaced, staggered rows in the field of the sheet.  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.
- #6 Maximum Design Pressure = -45.0 psf\*:**  
 Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Glasbase Base Sheet; Flexiglas Base Sheet; Flintlastic Base 20; All Weather / Empire Base Sheet; Flintlastic Poly SMS Base; Flintlastic Ultra Poly SMS Base or Yosemite Venting Base Sheet  
 Fasteners: Simplex MAXX Cap Fasteners  
 Spacing: 9-inch o.c. at the 2-inch wide side laps and 18-inch o.c. at two (2) equally spaced, staggered center rows.  
 Underlayment: Flintlastic GMS, applied in hot asphalt or Flintlastic GTA, torch-applied.
- #7 Maximum Design Pressure = -52.5 psf:**  
 Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Glasbase Base Sheet; Flexiglas Base Sheet; Flintlastic Base 20; All Weather / Empire Base Sheet; Flintlastic Poly SMS Base; Flintlastic Ultra Poly SMS Base or Yosemite Venting Base Sheet  
 Fasteners: Simplex MAXX Cap Fasteners  
 Spacing: 9-inch o.c. at the 2-inch wide side laps and 12-inch o.c. at two (2) equally spaced, staggered center rows.  
 Underlayment: Flintlastic GMS, applied in hot asphalt or Flintlastic GTA, torch-applied.
- #8 Maximum Design Pressure = -52.5 psf:**  
 Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Flintlastic SA NailBase  
 Fasteners: Min. 1-inch long, 12 ga. Simplex Metal Cap Nails  
 Spacing: 6-inch o.c. at the min. 2-inch laps and 6-inch o.c. at four (4) equally spaced, staggered rows in the field of the sheet.  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.
- #9 Maximum Design Pressure = -60.0 psf:**  
 Deck: Min. 19/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Flintlastic SA NailBase  
 Fasteners: 12 ga., 1¼-inch long galvanized ring shank nails through 32 ga., 1 5/8-inch diameter tin caps  
 Spacing: 8-inch o.c. at the min. 2-inch laps and 8-inch o.c. at three (3) equally spaced, staggered rows in the field of the sheet.  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.

**#10 Maximum Design Pressure = -67.5 psf:**

Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Glasbase Base Sheet; Flexiglas Base Sheet; Flintlastic Base 20; All Weather / Empire Base Sheet; Flintlastic Poly SMS Base; Flintlastic Ultra Poly SMS Base or Yosemite Venting Base Sheet  
 Fasteners: Cap nails: 1-inch diameter, 0.032-inch thick metal cap with 0.120-inch shank diameter, annular ring shank nails  
 Spacing: 6-inch o.c. at 4-inch lap and 6-inch o.c. at five (5) equally spaced, staggered center rows in the field of the sheet.  
 Underlayment: Flintlastic GMS, applied in hot asphalt.

**#11 Maximum Design Pressure = -75.0 psf:**

Deck: Min. 19/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Flintlastic SA NailBase  
 Fasteners: 12 ga., 1¼-inch long galvanized ring shank nails through 32 ga., 1 5/8-inch diameter tin caps  
 Spacing: 6-inch o.c. at the min. 2-inch laps and 6-inch o.c. at four (4) equally spaced, staggered rows in the field of the sheet.  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.

**#12 Maximum Design Pressure = -90.0 psf:**

Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Glasbase Base Sheet; Flexiglas Base Sheet; Flintlastic Base 20; All Weather / Empire Base Sheet; Flintlastic Poly SMS Base; Flintlastic Ultra Poly SMS Base or Yosemite Venting Base Sheet  
 Fasteners: Simplex MAXX Cap Fasteners  
 Spacing: 6-inch o.c. at the 2-inch wide side laps and 6-inch o.c. at two (2) equally spaced, staggered center rows.  
 Underlayment: Flintlastic GMS, applied in hot asphalt or Flintlastic GTA, torch-applied.

**#14 Maximum Design Pressure = -105.0 psf:**

Deck: Min. 15/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Glasbase Base Sheet; Flexiglas Base Sheet; Flintlastic Base 20; All Weather / Empire Base Sheet; Flintlastic Poly SMS Base; Flintlastic Ultra Poly SMS Base or Yosemite Venting Base Sheet  
 Fasteners: Simplex MAXX Cap Fasteners  
 Spacing: 6-inch o.c. at the 2-inch wide side laps and 6-inch o.c. at three (3) equally spaced, staggered center rows.  
 Underlayment: Flintlastic GMS, applied in hot asphalt or Flintlastic GTA, torch-applied.

**#15 Maximum Design Pressure = -105.0 psf:**

Deck: Min. 19/32-inch plywood to meet project requirements to satisfaction of AHJ.  
 Base Sheet: Flintlastic SA NailBase  
 Fasteners: 12 ga., 1¼-inch long galvanized ring shank nails through 32 ga., 1 5/8-inch diameter tin caps  
 Spacing: 4-inch o.c. at the min. 2-inch laps and 4-inch o.c. at four (4) equally spaced, staggered rows in the field of the sheet.  
 Base Ply: (Optional) Flintlastic SA PlyBase or Flintlastic SA Mid Ply, self-adhered.  
 Underlayment: Flintlastic SA Cap, self-adhered.

5.6.3.1 All other direct-deck, adhered CertainTeed underlayment systems beneath foam-on or mortar-set tile systems carry a Maximum Design Pressure of -45 psf.

5.6.3.2 For mechanically attached Base Sheet, the maximum design pressure for the selected assembly shall meet or exceed that required under FRSA/TRI April 2012 (04-12), Appendix A, Table 1A. Alternatively, the maximum design pressure for the selected assembly shall meet or exceed the Zone 1 design pressure determined in accordance with FBC 1609. In this case, Zones 2 and 3 shall employ an attachment density designed by a qualified design professional to resist the elevated pressure criteria. Commonly used methods are ANSI/SPRI WD1, FM Loss Prevention Data Sheet 1-29 and Roofing Application Standard RAS 117. Assemblies marked with an asterisk\* carry the limitations set forth in Section 2.2.10.1 of FM Loss Prevention Data Sheet 1-29 (January 2016) for Zone 2/3 enhancements.

5.7 Exposure Limitations:

Roofers' Select shall not be left exposed for longer than 30-days after installation. Refer to installation instructions specific to anticipated exposure in Section 6.

Black Diamond Base, WinterGuard HT, WinterGuard Sand, WinterGuard Granular or MetaLayment shall not be left exposed for longer than 180-days after installation.

Flintlastic SA Cap, Flintlastic SA Cap FR, Flintlastic GTA or Flintlastic GMS do not have an exposure limitation, unless the prepared roof covering is to be adhesive-set tile atop Flintlastic SA Cap, GTA or GMS, in which case the maximum exposure is 180 days.

Flintlastic SA NailBase, Flintlastic SA PlyBase, Flintlastic SA Mid Ply and Flintlastic Ultra Glass SA, for use as a base-layer in a multi-ply underlayment system, shall not be left exposed for longer than 30-days after installation, prior to placement of subsequent underlayment layer.

5.8 Tile Slippage Limitations (per FRSA/TRI April 2012 (04-12)):

When loading roof tiles on the underlayment in direct-deck tile assemblies, the maximum roof slope shall be as follows. These slope limitations can only be exceeded by using battens during loading of the roof tiles.

TABLE 2: TILE SLIPPAGE LIMITATIONS FOR DIRECT-DECK TILE INSTALLATIONS			
Underlayment	Tile Profile	Staging Method	Maximum Slope
Flintlastic GMS	All	Max. 10-tile stack	4:12
Flintlastic GTA	All	Max. 10-tile stack	6:12
Flintlastic SA Cap	Flat	Max. 6-tile stack (4 over 2)	6:12
	Lugged	Max. 6-tile stack (4 over 2)	5:12

6. INSTALLATION:

6.1 **CertainTeed Roof Underlayments** shall be installed in accordance with **CertainTeed** published installation requirements subject to the Limitations set forth in Section 5 herein and the specifics noted below.

6.2 Re-fasten any loose decking panels, and check for protruding nail heads. Sweep the substrate thoroughly to remove any dust and debris prior to application, and primed the substrate (if applicable).

6.3 **Flintlastic SA NailBase, Flintlastic SA PlyBase, Flintlastic SA Mid Ply or Flintlastic Ultra Glass SA:**

6.3.1 **Flintlastic SA NailBase, Flintlastic SA PlyBase and Flintlastic SA Mid Ply** are limited to use as a base or mid-layer in multi-ply underlayment systems beneath **Flintlastic SA Cap** or **Flintlastic SA Cap FR**.

6.3.2 **Flintlastic Ultra Glass SA** is limited to use as a base-layer in multi-ply underlayment systems beneath **Flintlastic GTA** or **Flintlastic GMS**.

6.3.3 Install the base-layer underlayment to the substrates detailed in **Section 5.6** in accordance with **CertainTeed** published installation instructions, followed by the final underlayment layer in accordance with the instructions outlined below for the particular top-layer underlayment.

6.3.4 Roof cover limitations are those associated with the top-layer underlayment, as set forth in **Table 1**.



**6.4 Black Diamond Base, Flintlastic SA Cap or SA Cap FR, WinterGuard or MetaLaymat:**

6.4.1 Shall be installed in compliance with current **CertainTeed** published installation requirements and **FBC 1507** for the type of prepared roof covering to be installed.

6.4.2 Non-Tile Applications:

Shall be fully self-adhered to the substrates noted in **Section 5.6**. Side laps shall be minimum 4-inch and end-laps minimum 6-inch wide, pressed firmly with a seam-roller, and offset end-laps minimum 2 feet from course to course.

Consult **CertainTeed** instructions for use of **FlintBond SBS Modified Bitumen Adhesive**, trowel grade, on the 6-inch end laps and T-seam detailing.

Consult **CertainTeed** instructions regarding back-nailing requirements.

6.4.3 Tile Applications (Flintlastic SA Cap only):

Reference is made to **FRSA/TRI April 2012 (04-12)** Installation Manual and **Table 1** herein.

For mechanically fastened tile roofing over 2-ply system, consisting of Base Sheet and self-adhering top sheet(s), Base Sheet fastening shall be not less than **FRSA/TRI April 2012 (04-12), Table 1**.

For adhesive-set tile applications, refer to **Section 5.6.3** herein.

**6.5 Flintlastic GTA:**

6.5.1 **Flintlastic GTA** shall be installed in compliance with current **CertainTeed** published installation requirements. For use in tile applications, **Flintlastic GTA** is for use as an alternate to the Heat Applied "Cap Sheet" in the "Two Ply System" from **FRSA/TRI April 2012 (04-12)** beneath mechanically fastened or adhered tile roof systems (Base Sheet Limited per 5.6.2)

6.5.2 **Flintlastic GTA** shall be fully torch applied to the substrates noted in Section 5.6. Side (horizontal) laps shall be minimum 3-inch and end (vertical) laps minimum 6-inch wide, and offset end-laps minimum 3 feet from course to course. Side and end-laps shall be fully heat-welded and inspected to ensure minimum 3/8-inch flow of modified compound beyond the lap edge.

6.5.3 Consult CertainTeed instructions regarding back-nailing requirements.

**6.6 Flintlastic GMS:**

6.6.1 **Flintlastic GMS** shall be installed in compliance with current **CertainTeed** published installation requirements. For use in tile applications, **Flintlastic GMS** is for use as an alternate to "Mineral Surface Roll Roofing" (ASTM D6380, Class M) in the "Single Ply System" from **FRSA/TRI April 2012 (04-12)** beneath mechanically fastened tile roof systems or the Hot Asphalt applied "Cap Sheet" in the "Two Ply System" from **FRSA/TRI April 2012 (04-12)** beneath mechanically fastened or adhered tile roof systems.

6.6.2 **Flintlastic GMS** shall be fully asphalt-applied to the substrates noted in Section 5.6. Side (horizontal) laps shall be minimum 3-inch and end (vertical) laps minimum 6-inch wide, and offset end-laps minimum 3 feet from course to course. Side and end-laps shall be fully adhered in a complete mopping of hot asphalt with asphalt extending approximately 3/8-inch beyond the lap edge.

6.6.3 Consult CertainTeed instructions regarding back-nailing requirements.



**6.7 Roofers' Select:**

- 6.7.1 **Standard-Slope Application (4:12 and greater):** Starting at the lower edge of the roof, apply a single layer of Roofers' Select parallel to the eaves, overhanging drip edge by ½-inch. Overlap ends (vertical laps) at least 4-inch and sides (horizontal laps) at least 2-inch. Offset end laps from course to course at least 6-feet. Apply flat and unwrinkled, fastening as required to hold in place.
- 6.7.2 **Low Slope Application (2:12 up to 4:12):** Starting at the lower edge of the roof, cover the entire deck by applying a double layer of Roofers' Select parallel to the eaves. Begin by applying a 19-inch wide starter strip of Roofers' Select along the eaves, overlapping the drip edge by ½-inch. Place a full-width sheet over the starter, with lower edge flush to the starter's lower edge. Apply succeeding 36-inch wide courses up the roof slope, overlapping the previous course by 19-inch in "shingle-fashion". Overlap ends at least 12-inch. Offset end laps from course to course at least 6-feet. Apply flat and unwrinkled, fastening as required to hold in place.
- 6.7.3 **Eaves Flashing for Ice Dam Protection (all slopes):** Eaves flashing may be constructed from self-adhering waterproofing underlayment holding Florida Product Approval, or by applying a double layer of Roofers' Select cemented together with asphalt roofing cement (ASTM D 4586, Type II). Eaves flashing should be installed to a level of at least 24-inch inside the interior wall line, or in areas of severe icing, at least up to the highest water level expected to occur from ice dams to the satisfaction of the Authority Having Jurisdiction (AHJ).

**6.8 Tile Staging (Flintlastic SA Cap, Flintlastic GTA or Flintlastic GMS):**

- 6.8.1 Tile shall be loaded and staged in a manner that prevents tile slippage and/or damage to the underlayment. Refer to **Table 2** herein, and CertainTeed published requirements for tile staging.
- 6.8.2 Battens and/or Counter-battens, as required by the tile manufacturer and **FRSA/TRI April 2012 (04-12)** must be used on all roof slopes greater than 7:12. Precautions should be taken as needed, such as the use of battens or nail-boards, to prevent tile sliding and/or damage to the underlayment during the loading process.

**7. BUILDING PERMIT REQUIREMENTS:**

As required by the Building Official or Authority Having Jurisdiction (AHJ) in order to properly evaluate the installation of this product.

**8. MANUFACTURING PLANTS:**

Contact the noted QA agency for information on product locations covered for **F.A.C. 61G20-3** QA requirements. The following plants have qualified products under their respective physical properties specifications.

Plant	Specification	Product(s)
Little Rock, AR	ASTM D1970	WinterGuard HT, MetaLayment, Flintlastic SA PlyBase
	ASTM D4601	Flintlastic SA NailBase
	ASTM D6163	Flintlastic SA Mid Ply, Flintlastic Ultra Glass SA, Flintlastic SA Cap FR
	ASTM D6164	Flintlastic GMS
	ASTM D1970, ASTM D6164 & FRSA/TRI April 2012	Flintlastic SA Cap
	ASTM D6222	Flintlastic GTA
Shakopee, MN	ASTM D1970	WinterGuard Sand, WinterGuard Granular, Black Diamond Base Sheet,
Shreveport, LA	ASTM D6757	Roofers' Select

**9. QUALITY ASSURANCE ENTITY:**

UL, LLC. – QUA9625; (414) 248-6409; karen.buchmann@ul.com

- END OF EVALUATION REPORT -



**STATE OF FLORIDA  
DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION**

**CONSTRUCTION INDUSTRY LICENSING BOARD  
2601 BLAIR STONE ROAD  
TALLAHASSEE FL 32399-0783**


**(850) 487-1395**

**NOLAND, GREGORY SCOTT  
NOLAND'S ROOFING INC.  
1295 W HWY 50  
CLERMONT FL 34711**

Congratulations! With this license you become one of the nearly one million Floridians licensed by the Department of Business and Professional Regulation. Our professionals and businesses range from architects to yacht brokers, from boxers to barbeque restaurants, and they keep Florida's economy strong.

Every day we work to improve the way we do business in order to serve you better. For information about our services, please log onto [www.myfloridalicense.com](http://www.myfloridalicense.com). There you can find more information about our divisions and the regulations that impact you, subscribe to department newsletters and learn more about the Department's initiatives.

Our mission at the Department is: License Efficiently, Regulate Fairly. We constantly strive to serve you better so that you can serve your customers. Thank you for doing business in Florida, and congratulations on your new license!

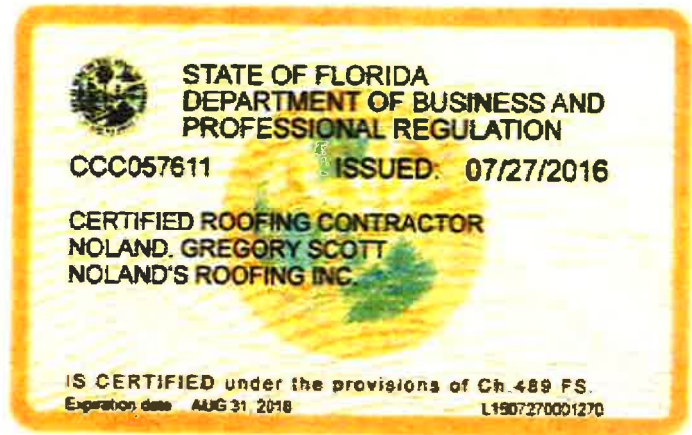

**DETACH HERE**

**RICK SCOTT, GOVERNOR**

**KEN LAWSON, SECRETARY**

**STATE OF FLORIDA  
DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION  
CONSTRUCTION INDUSTRY LICENSING BOARD**

LICENSE NUMBER	
CCC057611	

**The ROOFING CONTRACTOR  
Named below IS CERTIFIED  
Under the provisions of Chapter 489 FS.  
Expiration date: AUG 31, 2018**



**NOLAND, GREGORY SCOTT  
NOLAND'S ROOFING INC.  
1295 W HWY 50  
CLERMONT FL 34711**





**BOB McKEE**  
LAKE COUNTY TAX COLLECTOR

EMPLOYEES 4

TYPE OF BUSINESS CONTRACTING

BUSINESS NOLANDS ROOFING INC  
1295 W HWY 50

NOLANDS ROOFING INC  
1295 W HWY 50  
CLERMONT, FL 34711

**2017 / 2018**  
**LAKE COUNTY BUSINESS TAX RECEIPT**  
**STATE OF FLORIDA**



ACCT NO. 126604  
RECEIPT NO. 8760037232

**EXPIRES SEPTEMBER 30, 2018**

ORIGINAL TAX	30.00
PENALTY	0.00
TRANSFER FEE	0.00
AMOUNT PAID	30.00
TOTAL DUE	\$0.00

Receipt #2017-0037280  
Paid 08/11/2017 30.00





- [Searches](#)
- [Sales Search](#)
- [Results](#)
- [Property Record Card](#)**
- [My Favorites](#)

[Sign up for e-Notify...](#)

### 7224 Seminole Dr < 29-23-30-4389-04-081 >

**Name(s):** Dodson Shirley Rice  
**Physical Street Address:** 7224 Seminole Dr  
**Mailing Address (On File):** 7224 Seminole Dr  
 Belle Isle, FL 32812-3714  
**Postal City and Zipcode:** Orlando, FL 32812  
**Property Use:** 0130 - Sfr - Lake Front  
**Incorrect Mailing Address?**  
**Municipality:** Belle Isle



### View 2017 Property Record Card

- [Property Features](#)
- [Values, Exemptions and Taxes](#)**
- [Sales Analysis](#)
- [Location Info](#)
- [Market Stats](#)
- [Update Information](#)

2018 values will be available in August of 2018.

#### Property Description

[View Plat](#)

LAKE CONWAY PARK G/138 BEG E BOUND LOT 8 BLK D 26.75 FT SE OF SE COR OF LOT 7 RUN S 74 DEG W 172.8 FT S 30 DEG E 81.66 FT N 79 DEG E 178.4 FT N 30 DEG W 100 FT TO POB

**Total Land Area** 23,371 sqft (+/-) | 0.54 acres (+/-) GIS Calculated Notice

#### Land

Land Use Code	Zoning	Land Units	Unit Price	Land Value	Class Unit Price	Class Value
0130 - Sfr - Lake Front	R-1-AA	1 LOT(S)	working...	working...	working...	working...

Page 1 of 1 (1 total records)

#### Buildings

Important Information		Structure				
	<b>Model Code:</b>	01 - Single Fam Residence	<b>Actual Year Built:</b>	1979	<b>Gross Area:</b>	5148 sqft
	<b>Type Code:</b>	0103 - Single Fam Class III	<b>Beds:</b>	3	<b>Living Area:</b>	3128 sqft
	<b>Building Value:</b>	working...	<b>Baths:</b>	3.5	<b>Exterior Wall:</b>	Common Brick
	<b>Estimated New Cost:</b>	working...	<b>Floors:</b>	2	<b>Interior Wall:</b>	Drywall

Page 1 of 1 (1 total records)

#### Extra Features

Description	Date Built	Units	XFOB Value
FPL2 - Average Fireplace	01/01/1979	1 Unit(s)	working...
WLVN - Wall No Value	01/01/2010	2 Unit(s)	working...

Page 1 of 1 (2 total records)

This Data Printed on 08/14/2018 and System Data Last Refreshed on 08/13/2018