

City of Belle Isle Job Site Permit Card ROOF 2021-04-075

Class: Residential

Site Address: 5833 Windmill Ct- Belle Isle, FL 32809

After the In Progress has been passed, then the entire roof is

Parcel Number: 24-23-29-9361-00-100. Municipality Belle Isle INSPECTIONS CANNOT BE SCHEDULED IF A NOC IS PENDING FOR THIS PROJECT.

Description of Work: ROOF for SFR

N	ımber	of	Ste	ries	
1 J L	шист	VI.	APLU	11 I E S.	-

92003

Both new & re-roof

Code 720 Final

ASPHALT SHINGLES with underlayment Square Footage: 3500.

Issued: GOLD KEY ROOFING LLC, HEWITT, JEFFREY ALLAN **License #** CCC1329157 Contact # 407 851-0680 4 , 20 , 201 Payment/ Issued Date & Method:

□ Picked up by			□ Sent by mail to	o the mailing address	Emailed
□ Visa	☐ Master Card	Amex	□ Discover	☐ Check / Money Order#	100 100000

ROOF	INSPECTOR	DATE	COMMENTS
NEW ROOFS ONLY			This inspection only applies for a brand new roof only!
Code 700 Deck Nailing,			The state of the s
Dry-In, Flashing	1		
Both new & re-roof			This inspection consists of all underlayment/black paper
Code 710 In - Progress			coverage and only 25% shingle coverage.
	10	ľ	

PLEASE NOTE: In order to schedule any inspections, the PERMIT / plans-specs. must be issued and POSTED on the JOB SITE! THIS WILL AVOID ANY FAILED INSPECTIONS & RE-INSPECTION FEES. A permit expires in 6 months if approved inspections are not recorded /scheduled within that time frame. You are responsible for scheduling and keeping track all of your inspections -

★ Inspection requests & inquiries regarding results are to be emailed to BIDscheduling@UniversalEngineering.com; a confirmation email will be sent back to you upon scheduling. Next-Day Inspection requests must be made by 3:00 p.m.

Please include the following requirements in your

**The properties of the confirmation o request:

covered with shingles,

- Project Address
- Corresponding Permit Number
- Type of Inspection (Please reference your permit card for inspection codes)
- Date of Inspection (If no date is specified, the inspection will be scheduled for the next business day)
- Contact Name
- Contact Phone Number
- Gate / Entry code (If applicable)
- AM, PM, or Any Time (We do our best to accommodate time requests but cannot guarantee an exact arrival)

Universal Engineering Sciences - 3532 Maggie Blvd., Orlando, FL 32811407-581-8161 * Fax 407-581-0313 www.universalengineering.com

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."



City of Belle Isle
Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811
Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

APPLICATION FOR ROOFING PERMIT

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN

DATE OF APPLICATION
PAIS OF APPLICATIONS
PLEASE PRINT. The undersigned hereby applies for a permit to make installations as indicated below: Project Address 5833 M/100 decided by the second
Sass Williamill (+
Property Owner William / Terri Guyard Belle Isle, FL 32809 32812
Property Owner's Mailing Address 5833 11/10dps:11 C1
State Fl 7:- 0 + 22000
REQUIRED! To obtain this Information
Class of Building: Old New Type of Building: D. A. Type of Building: D. Typ
Type of Work: New Roof ReRoof ReRoof
REQUIRED! Florida Product Approvides
• REQUIRED! Florida Product Approval Form – NOTE: installation instructions must be posted on-site before your first inspection!!
the information below:
Roof Square Footage: 35
Type: Asphalt Shingles Metal Metal Modified Pit
homby and the street of the st
agree to conform to all Florida Building Code Regulations and City Ordinances regulation for Permit as outlined above, and if some in
collection and it again confident the sole authorized provides as a following and/or ordinary and the issuance
407 202 and a strices with the city limits of the City Contract
407-293-8000 to setup accounts for Commercial, Construction Roll Off, or other services needed. Rates are fixed by contract and are available at City LICENSE HOLDER SIGNATURE
LICENSE HOLDER SIGNATURE
LICENSE HOLDER NAME CHEFFREN HEWITH COUNTY LICENSE # CCC 1829157
Street Address 16 14 S ORANGE MATERIAL COMPANY NAME GOLD VEY POWENCE
State Fi Zin Cad 37001
Email Address JESS 100 agold Keyroofing. Com Phone Number 467-851-0680
Zoning Fee \$.
Building Official: Building Fee \$ 105.
Date 4-16-3 Review Fee \$
Verified Contractor's Licenses & Insurance are on file Date Ullow 1% BCAIB Fee \$ 2 min
Date 4 1601 1.5% DCA Fee \$ 2 M(N
NOTE; The Building Permit Number is required if the Book Land
NOTE: The Building Permit Number is required if the Roof Installation is associated with any construction or alteration where a Building Permit STIC Building Permit Number
They go

Pr Fr	ermit Number:	04/14/2021 09:45 AM Page 1 of 1 Rec Fee: \$10.00 Deed Doc Tax: \$0.00
D	constraint Call Van Da-6	
	repared by: Gold Key Roofing 874 S Orange Ave	Intangible Tax: \$0.00
	or4 5 Orange Ave	Phil Diamond, Comptroller
		Orange County, FL
4	eturn to: Gold Key Roofing 974 S Orange Ave	Ret To: SIMPLIFILE LC
7	orlandp FL 32806	
	Manup F L 32000	
St	NOTICE OF COMMENCEME ate of Florida, County of Orange	NT
171	ne undersigned hereby since neither that increased the	Kirman I I and I a
\AZi	ne undersigned hereby gives notice that improvement will	be made to certain real property, and in accordance
1.	th Chapter 713, Florida Statutes, the following information Description of property (legal description of the proper	is provided in this Notice of Commencement.
3.5	5833 Winhwillet Orland FZ 328	ty, and sireer address if available)
	Ke Cost	8 P.
3.	Owner information or Lessee information if the Less	ee contracted for the improvement
	Namelerr; 6;ron	
	Address 5503 Windmill Ct Oclarato F	2 32809
	Interest in Property OWNER	
	Name and address of fee simple titleholder (if differe	nt from Owner listed above)
	Name	
	Address	
4,	Contractor	
	Name Gold Key Roofing	Telephone Number 407-851-0680
-	Address 4874 S Orange Ave Orlando FL 32806	
5.	Surety (if applicable, a copy of the payment bond is attac	
	Name	Telephone Number
6	AddressLender	Amount of Bond \$
0.	WWW.	4=19. V 19. V
	Name	Telephone Number
7	Address State of Floridation of the State of Theorem of Floridation of the State of Fl	
	Persons within the State of Florida designated by Ow be served as provided by §713.13(1)(a)7, Florida Stat	vner upon whom notices or other documents may
	Name	
	Address	Telephone Number
8	In addition to himself or herself, Owner designates to	ha fallowing to reaches a serve of the Line
	Notice as provided in §713.13(1)(b), Florida Statutes.	ne ronowing to receive a copy of the Lienor's
		Telephone Number
	Address	
9_	Expiration date of notice of commencement (the expi	ration date will be 1 year from the date of recepting
9	unless a different date is specified)	reason date will be 1 year from the date of recording
		The state of the s
RESULT	G TO OWNER: ANY PAYMENTS MADE BY THE OWNER AFTER TH ISIDERED IMPROPER PAYMENTS UNDER CHAPTER 743, PART I, IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPE ED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECT UR LENDER OR AN ATTORNEY BEFORE COMMENCING WORK OF	SECTION 713.13, FLORIDA STATUTES, AND CAN RTY. A NOTICE OF COMMENCEMENT MUST BE
0	in L. XI ward	OWNER
Signature	of Owner or Lessee, or Owner's or Lessee's Authorized Officer/Director	/Partner/Manager Signatory's Title/Office
The fore	going instrument was acknowledged before me this	day of 421 by TERRI GIRARD
	MILLED	coonthlyear on mame of person
as	OUNIUN for	UWNER
	Type of authority, e.g., officer, trustee atterney in fact Na	me of party on behalf of whom instrument was executed
/	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	1
_	TONKON II IN LOST	CHSSICA N GRAF
,	Signature of Notary Public - State of Florida	Print, type, or stamp commissioned name of Notary Public
-/-	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	SOCIONE SOCIENTAL AND CONTROL OF
Pers	onally Known OR Produced ID	Passassassassassassassassassassassassass
1)(05	of ID Produced	JESSICA N GRAF Notary Public - State of Florida Commission #.HH 088094 My Comm. Expires Mar 29, 2025 Bonded through National Notary Assn.
rom	content revised: 01/23/14 State of FLORIDA. County of 0 Per §668.50, F.S., which defin	ORANGE. es and permits electronic signatures.

DOC # 20210222827

I certify that this is a true copy of the document as reflected in the Official Records.

PHIL DIAMOND, COUNTY COMPTROLLER

Deputy Comptroller

By Renee Simmons at 12:49 pm, Apr 14, 2021

Date



Applicant Signature

City of Belle Isle

Universal Engineering Sciences 3532 Maggie Blvd., Orlando, FL 32811 Tel 407-581-8161 * Fax 407-581-0313 * www.universalengineering.com

Product Approval Form

pramed notifitie local	product supplier.	The following inforr	nation must be t		pplication and availa	nd approval numbe ww.floridabuild ble onsite for inspe	ors of the building.org or can actions:
NOTE: The Install	lation instructions	must be posted o	п-site before y	our first Inspection!!			
Product Type	Manufacturer	Model/Series	FL Product Approval #	Product Type	Manufacturer	Model/Series	FL Product
	EXTERIOR D	OORS	Approvai #		Walson .		Approval #
Swinging			Property of	Sliding	WALL PA	NELS	
Sliding				Soffits			
Sectional/Rollup	Mr.			Storefront			
Other				1			
				Glass Block Other			
A SUPERSTANTING	WINDOW	/S	W. W. A. S.	Other	POOLING PRO		
Single/Dbl Hung			S TO MAKE THE	Asphalt Shingles	ROOFING PRO	DUCIS	
Horizontal Slider				Asphalt Shingles UNCEQUALMENT Roofing Tiles	EAGO LOOL	Lonamark	M444-
Casement				Roofing Tiles	CHOIL HERO	noo kunner i	121841-1
Fixed				Single Ply Roof			
Mullion				Underlayment			
Skylights				Other			
Other							
	STRUCTURAL COM	PONENTS		CONTRACTOR OF THE			
Wood Connectors					OTHER		
Vood Anchors							
russ Plates							
nsulation Forms							
ther							
1							

with the minimum required design pressures for the structure. Specific compliance will be verified during field inspections.



CERTIFICATE OF LIABILITY INSURANCE THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS DATE (MM/DD/YYYY) CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the FRSA Self Insurers Fund, Inc. CONTACT Debra Guidry, CPCU 4099 Metric Drive PHONE (A/G, No. Ext); (800) 767-3772 E-MAIL CONTROLOGY Winter Park, FL 32792 FAX (A/C, No): (407) 671-2520 ADDRESS: cert@frsasif.com INSURER(S) AFFORDING COVERAGE FRSA Self Insurers Fund / Evanston Insurance Co. INSURED NAIC # INSURER A: Gold Key Roofing, LLC and Gold Key Cabinetry, Inc. 35378 INSURER B 4874 S. Orange Avenue INSURER C: Orlando, FL 32806 INSURER D: INSURER F COVERAGES INSURER F CERTIFICATE NUMBER: THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS. POLICY EFF POLICY EXP POLICY NUMBER COMMERCIAL GENERAL UABILITY LIMITS EACH OCCURRENCE DAMAGE TO RENTED PREMISES (Ea occurrence) CLAIMS-MADE OCCUR MED EXP (Any one person) N/A GEN'L AGGREGATE LIMIT APPLIES PER PERSONAL & ADV INJURY POLICY PRO-JECT GENERAL AGGREGATE \$ OTHER PRODUCTS - COMPIOP AGG \$ AUTOMOBILE LIABILITY COMBINED SINGLE LIMIT (Ea accident) ANY AUTO ALL OWNED AUTOS CHEDULED BODILY INJURY (Per person) AUTOS NON-OWNED AUTOS N/A BODILY INJURY (Per accident) HIRED AUTOS PROPERTY DAMAGE (Per accident) UMBRELLA LIAB OCCUR S EXCESS LIAB CLAIMS-MADE EACH OCCURRENCE N/A \$ DED RETENTIONS AGGREGATE WORKERS COMPENSATION AND EMPLOYERS' LIABILITY \$ \$ ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) X PER STATUTE N N 870-040079 / 3EN8747 01/01/2021 If yes, describe under DESCRIPTION OF OPERATIONS below 01/01/2022 E.L. EACH ACCIDENT 1,000,000 E.L. DISEASE - EA EMPLOYEE 1,000,000 E.L. DISEASE - POLICY LIMIT 1,000,000 DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required) REMARKS: Non-cancelable, without 30 days prior written notice, except for non-payment of premium which will be a 10 day written notice. Lic #CCC1329157 Lic #CBC060354 CERTIFICATE HOLDER CANCELLATION Attn: SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. City of Belle Isle 1600 Nela Ave. Belle Isle, FL 32809 AUTHORIZED REPRESENTATIVE Debra Guidry CPCU

Underwriting Manager

RICK SINGH, CFA - ORANGE COUNTY PROPERTY APPRAISER



Land

Land Use Code	Zoning	Land Units	Unit Price	Land Value	Class Unit Price	Class Value
0100 - Single Family	R-1-AA	1 LOT(S)	\$60,000.00	\$60,000	\$0.00	
				755,555	\$0.00	\$60,000

Notice

GIS Calculated

Page 1 of 1 (1 total records)

Total Land Area

15,151 sqft (+/-) | 0.35 acres (+/-)

Buildings

State of the last	Important Information	End Wy hill end house to his	Structure	- Miles	Salari de location	
r/	Model Code:	01 - Single Fam Residence	Actual Year Built:	1987	Gross Area:	2748 saft
More	Type Code;	0103 - Single Fam Class 🏻	Beds:	4	Living Area:	1884 saft
Dotaila	Building Value:	\$168,301	Baths:	2.0	Exterior Wall:	Concrete Block Stucco
	Estimated New Cost:	\$214,944	Floors:	1	Interior Wall:	Drywall

Page 1 of 1 (1 total records)

Extra Features

Description	Date Built	Units	XFOB Value
FPL1 - Basic Fireplace	01/01/1987	1 Unit(s)	THE RESIDENCE OF THE PARTY OF T
PT1 - Patio 1	04/23/1992		\$1,500
Page 1 of 1 /2 total regards)	- 1, 40, 4522	1 Unit(s)	\$1,000

Page 1 of 1 (2 total records)

This Data Printed on 01/08/2019 and System Data Last Refreshed on 01/07/2019

Business & Professional Regulation







Product Approval Menu > Product or Application Search > Application List > Application Detail

Application Type

Code Version Application Status FL21841-R6

Revision 2020

Approved

Comments Archived

Product Manufacturer

Address/Phone/Email

CertainTeed, LLC (Roofing)

20 Moores Road Malvern, PA 19355 (610) 893-5400

mark.d.harner@saint-gobain.com

Authorized Signature

Mark Hamer

mark.d.harner@saint-gobain.com

Technical Representative Address/Phone/Email

Mark D. Harner 18 Moores Road Malvern, PA 19355 (610) 651-5847

Mark.D.Harner@saint-gobain.com

Quality Assurance Representative Address/Phone/Email

Category Subcategory

Roofing

Underlayments

Compliance Method

Evaluation Report from a Florida Registered Architect or a Licensed Florida

Professional Engineer

Evaluation Report - Hardcopy Received

Florida Engineer or Architect Name who developed the Robert Nieminen

Evaluation Report

Florida License

Quality Assurance Entity

Quality Assurance Contract Expiration Date

Validated By

PE-59166

QAI Laboratories

06/12/2022

John W. Knezevich, PE

Validation Checklist - Hardcopy Received

Certificate of Independence

FL21841 R6 COI 2020 01 COI NIEMINEN.pdf

Referenced Standard and Year (of Standard)

Standard **ASTM D4533**

<u>Year</u> 2015

ASTM D4798 ASTM D4869 ASTM D5035

2011 2016

TAS 117(B)

2011

1995

Equivalence of Product Standards

Certified By

Sections from the Code

Product Approval Method Method 1 Option D Date Submitted 10/22/2020 Date Validated 10/23/2020 Date Pending FBC Approval 10/28/2020 Date Approved

Summary of Products

FL#	Model, Number or Name	Description
21841.1	RoofRunner and DiamondDeck	scrim-reinforced, polymer-based roof underlayments, with quality assurance by QAI Laboratories,
Approved for Impact Resist Design Pressu	use in HVHZ: No use outside HVHZ: Yes tant: N/A ure: N/A o ER Section 5 for Limits of Use.	Installation Instructions FI.21841 R6 II 2020 10 16 FINAL CERTAINTEED RR DD DADRA INDIA FI.21841-R6.pdf Verified By: Robert Nieminen PE-59166 Created by Independent Third Party: Yes Evaluation Reports FI.21841 R6 AE 2020 10 16 FINAL CERTAINTEED RR DD DADRA INDIA FI.21841-R6.pdf Created by Independent Third Party: Yes

12/16/2020

Back Next

Contact Us: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. Convright 2007-2013 State of Florida. :: Privacy Statement :: Accessibility Statement :: Refund Statement

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click here.





NEMO etc.

Certificate of Authorization #32455 353 Christian Street, Unit #13 Oxford, CT 06478 (203) 262-9245

ENGINEER EVALUATE TEST CONSULT

EVALUATION REPORT

CertainTeed, LLC 20 Moores Road Malvern, PA 19355 (610) 893-5400

Evaluation Report 13500.02.17-R6

FL21841-R6 Date of Issuance: 02/10/2017

Revision 6: 10/16/2020

SCOPE:

This Evaluation Report is issued under Rule 61G20-3 and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code. The product described herein has been evaluated for compliance with the 7th Edition (2020) Florida Building Code sections noted herein.

DESCRIPTION: RoofRunner™ and DiamondDeck®

LABELING: Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted

CONTINUED COMPLIANCE: This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance or production facility location(s) changes, or Code provisions that relate to the product(s) change. Acceptance of our Evaluation Reports by the named client constitutes agreement to notify NEMO ETC, LLC of any changes to the product(s), the Quality Assurance or the production facility location(s). NEMO ETC, LLC requires a complete review of its Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Florida Product Approval Number (FL#) preceded by the words "NEMO etc. Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 4.

Prepared by:

Robert J.M. Nieminen, P.E.

Florida Registration No. 59166, Florida DCA ANE1983

The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 10/16/2020. This does not serve as an electronically signed document.

CERTIFICATION OF INDEPENDENCE:

- 1. NEMO ETC, LLC does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or
- NEMO ETC, LLC is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
- Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for
- 4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the
- 5. This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained

© 2019 NEMO ETC, LLC



ROOFING COMPONENT EVALUATION:

SCOPE:

Product Category:

Roofing

Sub-Category:

Underlayment

Compliance Statement: RoofRunner™ and DiamondDeck®, as produced by CertainTeed, LLC, have demonstrated compliance with the following sections of the 7th Edition (2020) Florida Building Code through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions

STANDARDS:	ASSESSMENT OF THE REAL PROPERTY.		
Code Section 1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Property Tear strength	Standard ASTM D4533	<u>Year</u> 2015
1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Tensile strength	ASTM D5035	2011
1507.1.1.1(5) / R905.1.1.1(5) 1523.6.5.2.9 TAS 110	Liquid water transmission Rupture (pull-through) Accelerated Weathering	ASTM D4869 TAS 117(B) ASTM D4798	2016 1 99 5 2011

3.	REFERENCES:			
	Entity ERD (TST6049) ERD (TST6049) NEMO (TST6049) NEMO (TST6049) QAI (TST9808) QAI (TST9808) QAI (QUA7628) QAI (QUA7628)	Examination ASTM D4533 ASTM D4533 TAS 117(8) ASTM D4798, 4869, D5035 ASTM D4869 ASTM D4869 Traceability/Inspections Quality Control	Reference CTR-SC16080.10.17 ACT-SC16550.17 4i-CTR-19-SSCRT-01.A 4j-CTR-20-SSUDL-02.A RJ3502P-1 RJ3502P-2 Inspection Report Florida BCIS	Date 10/25/2017 10/18/2017 04/10/2019 10/16/2020 11/05/2014 11/05/2014 05/12/2020 Current

The state of the s		
Material Standard	Plant(s)	Docalet
2&3, Exception), 1507.1.1.1(5) / (2&3, Exception), 8905.1.1.1(5)	Dadra, India	Description scrim-reinforced, polymer-based roof
2&3, Exception), 1507.1.1.1/5) /	Dadra, India	underlayment; nominal 2.25 lbs/square scrim-reinforced, polymer-based roof underlayment; nominal 3.80 lbs/square
(Material Standard 2&3, Exception), 1507.1.1.1(5) / (2&3, Exception), R905.1.1.1(5) / 2&3, Exception), 1507.1.1.1(5) / (2&3, Exception), R905.1.1.1(5)	2&3, Exception), 1507.1.1.1(5) / Dadra, India (2&3, Exception), R905.1.1.1(5) / Dadra, India (2&3, Exception), 1507.1.1.1(5) / Dadra, India (2&3, Exception), Data (11.1.1)

LIMITATIONS:

- This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- This Evaluation Report is not for use in FBC High Velocity Hurricane Zone jurisdictions (i.e., Broward and Miami-5.2 5.3
- This Evaluation Report pertains to above-deck roof components. Roof decks and structural members shall be in accordance with FBC requirements to the satisfaction of the Authority Having Jurisdiction.
- This Evaluation Report does not include evaluation of fire classification. Refer to FBC 1505 for requirements and 5.4 limitations regarding roof assembly fire classification. Refer to FBC 2603 for requirements and limitations concerning the use of foam plastic insulation.



- RoofRunner™ or DiamondDeck® may be used with any prepared roof cover where the product is specifically 5.5 referenced within FBC approval documents. If not listed, a request may be made to the Authority Having Jurisdiction for approval based on this evaluation combined with supporting data for the prepared roof covering. 5.6 Allowable Roof Covers:

			TABLE 1	: ROOF COV	ER OPTIONS		Maria Inc.	- Velvery	
Underlayment	Asphalt	Clay and Co	ncrete Tile		etal	Slate or Slate-	We	ood	Photo-
	Shingles (1507.2) Mechanical Attach	Adhesive- Set	Panels (1507.4)	Shingles (1507.5)	Type Shingles	Shingles (1507.8)	Shakes (1507.9)	voltaic Shingles (1507,17)	
RoofRunner™	Yes	No	No	No		(1507.7)	1===7:0)	11307.3)	(1307.17
DiamondDeck*	Yes	No			No	No	No	No	No
5.7 Exposure L			No	Yes	Yes	Yes	No	No	No

Exposure Limitations:

TABLE 2: EX	POSURE LIMITATIONS	
Underlayment	Maximum Exposure (days	
loofRunner™	10	
DiamondDeck®	10	
	180	

6. INSTALLATION:

- RoofRunner™ and DiamondDeck® shall be installed in accordance with CertainTeed installation instructions subject to the Limitations set forth in Section 5 herein and the specifics noted below.
- Re-fasten any loose decking panels, and check for protruding nail heads. Sweep the substrate thoroughly to 6.2 remove any dust and debris prior to application, and prime the substrate (if applicable).
- Consult CertainTeed published recommendations for the installation of a leak barrier of ASTM D1970, such as 6.3 CertainTeed WinterGuard (FL11288), or equal holding Florida Statewide Product Approval at vulnerable leak areas.

6.4 RoofRunner™:

Shall be installed in compliance with requirements for a synthetic underlayment in FBC 1507.1.1.1(2, Exception), 6.4.1 1507.1.1.1(3, Exception) or 1507.1.1.1(5) or FBC Residential R905.1.1.1(2, Exception), R905.1.1.1(3, Exception) or R905.1.1.1(5) for the type of prepared roof covering to be installed, and the manufacturer's installation instructions. With the exception of Section 6.4.3 herein, these FBC requirements take precedence over the 6.4.2 Fasteners:

Minimum fasteners shall be corrosion resistant, ring-shank cap nails shall be as set forth in FBC 1507.1.1.1 or 1507.1.1.3 or FBC Residential R905.1.1.1 or R905.1.1.3.

6.4.3 <u>Attachment:</u> Minimum attachment is noted in Table 3.

Note: These patterns have been determined through testing and analysis as meeting the intent of those set forth in FBC 1507.1.1.1 or 1507.1.1.3 or FBC Residential R905.1.1.1 or R905.1.1.3, regardless of whether plastic cap nails or metal cap nails are utilized. Acceptance of this alternate attachment pattern is at the discretion of the Authority Having Jurisdiction, in advance of roof cover installation.

Page 3 of 4



Metal Cap Nails	BLE 3: MINIMUM ATTACHMENT FOR ROOFRUNN	VER***	
wetter cap realis	Plastic Cap Nails	Battens	
At the circular target pattern (3), which translates to 15-inch o.c. vertically and 12-inch o.c. horizontally. On vertical end-laps install 8 fasteners equally spaced 6-inch o.c. centered in the lap.	Max. 6-inch o.c. at the min. 3-inch horizontal side laps. At the circular target pattern (a) in the field of the sheet, which translates to 15-inch o.c. vertically and 12-inch o.c. horizontally. On vertical end-laps install 8 fasteners equally spaced 6-inch o.c. centered in the lap.	When batten systems are to be installed atop the underlayment, the underlayment	

6.5 DiamondDeck®

Shall be installed in compliance with requirements for a synthetic underlayment in FBC 1507.1.1.1(2, Exception), 1507.1.1.1(3, Exception) or 1507.1.1.1(5) or FBC Residential R905.1.1.1(2, Exception), R905.1.1.1(3, Exception) or R905.1.1.1(5) for the type of prepared roof covering to be installed, and the manufacturer's installation instructions. With the exception of Section 6.5.3 herein, these FBC requirements take precedence over the 6.5.2 Fasteners:

Minimum fasteners shall be corrosion resistant, ring-shank cap nails shall be as set forth in FBC 1507.1.1.1 or 1507.1.1.3 or FBC Residential R905.1.1.1 or R905.1.1.3.

Attachment: Minimum attachment is noted in Table 3.

Note: These patterns have been determined through testing and analysis as meeting the intent of those set forth in FBC 1507.1.1.1 or 1507.1.1.3 or FBC Residential R905.1.1.1 or R905.1.1.3, regardless of whether plastic cap nails or metal cap nails are utilized. Acceptance of this alternate attachment pattern is at the discretion of the Authority Having Jurisdiction, in advance of roof cover installation.

TABLE 4: MINIMUM ATTACHME	NT FOR DIAMONDDECK®
Metal or Plastic Cap Nails	Battens
and the state of t	When batten systems are to be installed atop the underlayment, the underlayment need only be attached at horizontal side-laps and vertical end-laps prior to batten installation

BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction to properly evaluate the installation of this

MANUFACTURING PLANTS:

Contact the named QA entity for manufacturing facilities covered by F.A.C. Rule 61G20-3 QA requirements. Refer to Section 4 herein for products and production locations having met codified material standards.

QUALITY ASSURANCE ENTITY:

QAI Laboratories. - QUA7628; (604) 527-8378, mlansdowne@qai.org

- END OF EVALUATION REPORT -

Business & Professional Regulation







Product Approval Menu > Product or Application Search > Application List > Application Detail

Application Type

Code Version Application Status FL5444-R16

Revision 2020

Approved

Comments Archived

Product Manufacturer

Address/Phone/Email

CertainTeed, LLC (Roofing)

20 Moores Road Malvern, PA 19355

(610) 893-5400

mark.d.harner@saint-gobain.com

Authorized Signature

Mark Harner

mark.d.harner@saint-gobain.com

Technical Representative Address/Phone/Email

Mark D. Harner 18 Moores Road Malvern, PA 19355 (610) 651-5847

Mark.D.Harner@saint-gobain.com

Quality Assurance Representative

Address/Phone/Email

Category

Subcategory

Roofing

Asphalt Shingles

Compliance Method

Evaluation Report from a Florida Registered Architect or a Licensed Florida

Professional Engineer

Evaluation Report - Hardcopy Received

Florida Engineer or Architect Name who developed the Robert Nieminen

Evaluation Report

Florida License

PE-59166

Quality Assurance Entity

UL LLC

Quality Assurance Contract Expiration Date

11/13/2022

Validated By

John W. Knezevich, PE

Validation Checklist - Hardcopy Received

Certificate of Independence

FL5444 R16 COI 2020 01 COI NIEMINEN.pdf

Referenced Standard and Year (of Standard)

Standard ASTM D3161

2016 2010

ASTM D3462 ASTM D7158

2019

<u>Year</u>

Equivalence of Product Standards Certified By

Sections from the Code

Product Approval Method

Method 1 Option D

Date Submitted	07/30/2020
Date Validated	08/04/2020
Date Pending FBC Approval	08/08/2020
Date Approved	10/13/2020

Summary of Products

FL#	Model, Number or Name	Description
5444.1	CertainTeed Asphalt Roof Shingles	3-tab, 4-tab, strip (no-cut-outs), laminated and architectural asphalt roof shingles
Impact Resista Design Pressur	se outside HVHZ: Yes int: N/A	Installation Instructions FL5444 R16 II 2020 07 24 FINAL ER CERTAINTEED FL5444-R16.pdf Verified By: Robert Nieminen, PE PE-59166 Created by Independent Third Party: Yes Evaluation Reports FL5444 R16 AE 2020 07 24 FINAL ER CERTAINTEED FL5444-R16.pdf Created by Independent Third Party: Yes



Contact Us :: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. Copyright 2007-2013 State of Florida. :: Privacy Statement :: Accessibility Statement :: Refund Statement

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S., must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click here.

Product Approval Accepts:











NEMO etc.

Certificate of Authorization #32455 353 Christian Street, Unit #13 Oxford, CT 06478 (203) 262-9245

ENGINEER

EVALUATE

TEST

CONSULT

EVALUATION REPORT

CertainTeed, LLC 20 Moores Road Malvern, PA 19355 (610) 893-5400

Evaluation Report 3532.09.05-R17 FL5444-R16

Date of Issuance: 09/22/2005

Revision 17: 07/24/2020

SCOPE:

This Evaluation Report is issued under **Rule 61G20-3** and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code. The product described herein has been evaluated for compliance with the **7**th **Edition (2020) Florida Building Code** sections noted herein.

DESCRIPTION: CertainTeed Asphalt Roof Shingles.

Labeling: Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein and FBC 1507.2.7.1 / R905.2.6.1

CONTINUED COMPLIANCE: This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance or production facility location(s) changes, or Code provisions that relate to the product(s) change. Acceptance of our Evaluation Reports by the named client constitutes agreement to notify NEMO ETC, LLC of any changes to the product(s), the Quality Assurance or the production facility location(s). NEMO ETC, LLC requires a complete review of its Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Florida Product Approval Number (FL#) preceded by the words "NEMO|etc. Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 14.

Prepared by:

Robert J.M. Nieminen, P.E.

Florida Registration No. 59166, Florida DCA ANE1983

02.55 02.55 03.57 04.05 05

The facsimile seal appearing was authorized by Robert Nieminen, P.E. on 07/24/2020. This does not serve as an electronically signed document.

CERTIFICATION OF INDEPENDENCE:

- 1. NEMO ETC, LLC does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
- 2. NEMO ETC, LLC is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
- 3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
- 4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
- This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any
 project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained
 specifically for that purpose.

©2018 NEMO ETC, LLC



ROOFING SYSTEMS EVALUATION:

1. SCOPE:

Product Category: Roofing

Sub-Category: Asphalt Shingles

Compliance Statement: CertainTeed Asphalt Roof Shingles, as produced by CertainTeed, LLC, have demonstrated compliance with the following sections of the 7th Edition (2020) Florida Building Code through testing in accordance with the following Standards. Compliance is subject to the Installation Requirements and Limitations / Conditions of Use set forth herein.

2.	STANDARDS:			Stolland house
	Section	Property	Standard	Year
	1507.2.5, R905.2.4	Material standard	ASTM D3462	2010
	1507.2.7.1, R905.2.6.1	Wind resistance	ASTM D3161	2016
	1507.2.7.1, R905.2.6.1	Wind resistance	ASTM D7158	2019

	1507.2.7.1, R905.2.6.1	Wind resistance Wind resistance	ASTM D3161	2016
	1307.2.7.1, K903.2.6.1	wind resistance	ASTM D7158	2019
3.	REFERENCES:			
	Entity	Examination	Reference	Date
	PRI (TST 5878)	ASTM D3161	256T0015	08/12/2019
	UL (TST 1740)	ASTM D3161	99NK26506	11/23/1999
	UL (TST 1740)	ASTM D3161	03CA12702	05/27/2003
	UL (TST 1740)	ASTM D3161	03CA12702	06/16/2003
	UL (TST 1740)	ASTM D3161	03NK29847	10/03/2003
	UL (TST 1740)	ASTM D3161	04CA11329	05/24/2004
	UL (TST 1740)	ASTM D3161	04CA32986	12/03/2004
	UL (TST 1740)	ASTM D3161	05NK07049	04/15/2005
	UL (TST 1740)	ASTM D3161	05NK16778	05/12/2005
	UL (TST 1740)	ASTM D3161	05CA16778	05/12/2005
	UL (TST 1740)	ASTM D3161	05NK14836	05/22/2005
	UL (TST 1740)	ASTM D3161	05NK22800	06/22/2005
	UL (TST 1740)	ASTM D3462	R684	09/21/2005
	UL (TST 1740)	ASTM D7158	05NK08037	06/28/2006
	UL (TST 1740)	ASTM D3161 & D3462	09CA28873	07/23/2009
	UL (TST 1740)	ASTM D3462	10CA41303	10/07/2010
	UL (TST 1740)	ASTM D3161	10CA41303	10/08/2010
	UL (TST 1740)	ASTM D7158	10CA41303	10/27/2010
	UL (TST 1740)	ASTM D3161 & D3462	10CA44960	11/11/2010
	UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	13CA32897	11/21/2013
	UL LLC (TST 9628)	ASTM D3161, D3462	TFWZ.R684	04/22/2014
	UL LLC (TST 9628)	ASTM D7158	TGAH.R684	04/22/2014
	UL LLC (TST 9628)	ASTM D3161 & D3462	4786334434	09/16/2014
	UL LLC (TST 9628)	ASTM D3161 & D3462	4786570826	02/12/2015
	UL LLC (TST 9628)	ASTM D3161	4786821352	02/21/2015
	UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4786570717	12/16/2015
	UL LLC (TST 9628)	ASTM D3161 & D3462	4787195678	02/09/2016
	UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787592174	10/21/2016
	UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787380356	10/26/2016
	UL LLC (TST 9628)	ASTM D3462	4787380357	10/13/2016
	UL LLC (TST 9628)	ASTM D7158	4787380357	11/08/2016
	UL LLC (TST 9628)	ASTM D3161	4787380357	11/09/2016
	UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4787586427	01/25/2017
	UL LLC (TST 9628)	ASTM D3161 & D3462	4788042412	11/15/2017
	UL LLC (TST 9628)	ASTM D3161, D3462 & D7158	4788362767	03/03/2018
	UL LLC (QUA 9625)	Quality Control	Service Confirmation	11/13/2019



		TABLE 1: ASPHALT SHINGLE COMPONENTS		The state of the s
Туре	Product	Description	Material Standard	Plant(s)
	High-Performance Starter	Fiberglass reinforced starter shingle, measuring 10" x 36", for use with Grand Manor® and Highland Slate®	ASTM D3462	NC
Starter	Presidential® Starter	Fiberglass reinforced starter shingle, measuring 13-1/4" x 40", with a reinforcement on the underside, for use with Presidential Shake® and Presidential Shake® TL	ASTM D3462	CA(F)
Strips	Presidential® Starter IR	Fiberglass reinforced starter shingle, measuring 13-1/4" x 40", for use with Presidential Shake® IR	ASTM D3462	CA(F)
	SwiftStart® Starter Shingle	Fiberglass reinforced starter strip, measuring 15-1/4" x 38-3/4"	ASTM D3462	MN
	Universal Starter	Fiberglass reinforced starter shingle, measuring 7" x 36", for use with shingles measuring 12" x 36" having a weather exposure ≤ 5"	ASTM D3462	NC
	CT 20 TM		ASTM D3462	LA, NC
	CT 20™ Metric	Fiberglass reinforced, 3-tab asphalt		OR
	XT™ 25	roof shingle		LA, MN, NC, OH
	XT™ 25 Metric	- Cor similare		OH, OR
	XT™ 30 IR			LA
	Highland Slate®	Fiberglass reinforced, 4-tab asphalt roof shingle	ASTM D3462	NC
	Arcadia™		ASTM D3462	CA(F)
	Belmont®			NC NC
	Belmont® IR			NC
	Carriage House®			NC NC
	Grand Manor®			NC
	Landmark®	Fiberglass reinforced, laminated asphalt roof shingle		CA(W), GA, LA, MA, M MN, NC, OH, OR, TX
phalt	Landmark® Pro			CA(W), GA, MA, MO, N OH, NC
ngles	Landmark® Pro Architect 80 Landmark Pro Solaris®	4		OR
	Landmark® Premium	i		CA(W)
	Landmark Solaris®	-		CA(W), MA, MN, OR, M
	Landmark Solaris® Gold/Platinum	4		CA(W), OR
	Landmark® TL			OR
	Landmark® TL Solaris			CA(F)
		Cit I		CA(F)
	NorthGate®	Fiberglass reinforced, laminated, SBS modified bitumen roof shingle	ASTM D3462	MN, OR
	Presidential Shake®			CA(F), MN
	Presidential Shake® IR	Fiberglass reinforced, architectural		MN
	Presidential Shake® TL	asphalt roof shingle	ASTM D3462	CA(F), MN
8	Presidential Solaris®			CA(F)
	Presidential TL Solaris			CA(F)
	Patriot	Fiberglass reinforced asphalt roof		

Note: Any of the above listed shingles may be produced in AR (algae resistant) versions



Туре	Product	Description	Material Standard	Plant(s)
Shado	Shangle Ridge®		ASTM D3462	NC
	Shadow Ridge®		ASTM D3462	MA, MN, NC, OH
	Shadow Ridge® Metric		ASTM D3462	OR
Ridge	e Cedar Crest® Fiberglass reinforced accessory	None	NC	
Shingles	Cedar Crest® IR	shingles for hip and ridge installation	None	
	NorthGate® Ridge		ASTM D3462	NC OR
	NorthGate® Accessory		ASTM D3462	OR MN

5. LIMITATIONS:

- 5.1 This is a Building Code Evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report is not for use in FBC High Velocity Hurricane Zone jurisdictions (i.e., Broward and Miami-Dade Counties).
- 5.3 This Evaluation Report pertains to above-deck roof components. Roof decks and structural members shall be in accordance with FBC requirements to the satisfaction of the Authority Having Jurisdiction.
- 5.4 This Evaluation Report does not include evaluation of fire classification. Refer to FBC 1505 for requirements and limitations regarding roof assembly fire classification. Refer to FBC 2603 for requirements and limitations concerning the use of foam plastic insulation.
- 5.5 <u>Wind Classification:</u> Refer to Section 6 for installation requirements to meet wind classifications.

Product	FBC Table 1507.2.7.1 or R905.2.6.1		
CT 20™	ASTM D3161(F) & ASTM D7158(H)		
CT 20™ Metric	ASTM D3161(F) & ASTM D7158(H)		
XT™ 25	ASTM D3161(F) & ASTM D7158(H)		
XT™ 25 Metric	ASTM D3161(F) & ASTM D7158(H)		
XT™ 30 IR	ASTM D3161(F) & ASTM D7158(H)		
Arcadia™	ASTM D3161(F) & ASTM D7158(H)		
Belmont [®]	ASTM D3161(F) & ASTM D7158(H)		
Belmont® IR	ASTM D3161(F) & ASTM D7158(H)		
Carriage House®	ASTM D3161(F) & ASTM D7158(H)		
Grand Manor®	ASTM D3161(F) & ASTM D7158(H)		
Landmark®	ASTM D3161(F) & ASTM D7158(H)		
Landmark® Pro	ASTM D3161(F) & ASTM D7158(H)		
Landmark® Pro Architect 80	ASTM D3161(F) & ASTM D7158(H)		
Landmark Pro Solaris®	ASTM D3161(F) & ASTM D7158(H)		
Landmark® Premium	ASTM D3161(F) & ASTM D7158(H)		
Landmark Solaris®	ASTM D3161(F) & ASTM D7158(H)		
Landmark Solaris® Gold/Platinum	ASTM D3161(F) & ASTM D7158(H)		
Landmark® TL	ASTM D3161(F) & ASTM D7158(H)		
NorthGate®	ASTM D3161(F) & ASTM D7158(H)		
Presidential Shake®	ASTM D3161(F) & ASTM D7158(H)		
Presidential Shake® IR	ASTM D3161(F) & ASTM D7158(H)		



TABLE 2A: WIND CLASSIFICATIONS, ASPHALT SHINGLES							
Product	FBC Table 1507.2.7.1 or R905.2.6.1						
Presidential Shake® TL	ASTM D3161(F) & ASTM D7158(H)						
Presidential Solaris®	ASTM D3161(F) & ASTM D7158(H)						
Presidential TL Solaris	ASTM D3161(F) & ASTM D7158(H)						
Highland Slate®	ASTM D3161(F) & ASTM D7158(H)						
Patriot	ASTM D3161(F) & ASTM D7158(H)						

5.5.1 Classification by ASTM D7158:

ASTM D7158, Class H applies only to **exposure category B or C** and a **building height of 60 feet or less**. Calculations by a qualified design professional are required for conditions outside these limitations. Contact the shingle manufacturer for data specific to each shingle.

Analysis in accordance with ASTM D7158 indicates the measured uplift resistance (R_T or R_A) for the CertainTeed asphalt Roof shingles listed in Table 1 (except Presidential Solaris®, Landmark Pro Solaris® and Landmark Solaris® Gold/Platinum) exceeds the calculated uplift force (F_T) under the following conditions:

- maximum design wind speed of V_{asd} = 150 mph (V_{ult} = 194 mph)
- located in Exposure D conditions
- no topographical variations (flat terrain)
- having a mean roof height less than or equal to 60 feet.

The shingles (except Presidential Solaris®, Landmark Pro Solaris® and Landmark Solaris® Gold/Platinum) are permissible under Code for installation in these conditions using the installation procedures detailed in this Evaluation Report and CertainTeed minimum requirements, subject to minimum codified fastening requirements established within any local jurisdiction, which shall take precedence.

	TABLE 2B: WIND CLASSIFICATIONS, ST	ARTER STRIPS AND HIP & RIDGE					
Туре	Product	FBC Table 1507.2.7.1 or R905.2.6.1					
	High-Performance Starter	ASTM D3161, Class F					
	Presidential® Starter	ASTM D3161, Class F					
Starter Strips	Presidential® Starter IR	ASTM D3161, Class F					
	SwiftStart® Starter Shingle	ASTM D3161, Class F					
	Universal Starter	ASTM D3161, Class F					
	Shangle Ridge®	ASTM D3161, Class F (sealant required, See Section 6					
	Shadow Ridge® (NC production)	ASTM D3161, Class F					
	Shadow Ridge® (MA, MN or OH production)	ASTM D3161, Class F (sealant required, See Section 6					
Hip & Ridge	Shadow Ridge * Metric (OR production)	ASTM D3161, Class F (sealant required, See Section 6 ASTM D3161, Class F (sealant required, See Section 6 ASTM D3161, Class F (sealant required, See Section 6 ASTM D3161, Class F ASTM D3161, Class F ASTM D3161, Class F					
Shingles	Cedar Crest®						
	Cedar Crest® IR						
	NorthGate® Ridge						
	NorthGate® Accessory						

- 5.5.2 High-Performance Starter shingles are limited to use with Grand Manor® and Highland Slate® shingles.
- 5.5.3 Presidential® Starter shingles must be applied using two (2) overlapping layers and are limited to use with Presidential Shake® and Presidential Shake® TL shingles.
- 5.5.4 Presidential® Starter IR shingles must be applied using two (2) overlapping layers and are limited to use with Presidential Shake® IR shingles.
- 5.5.5 **Universal Starter** shingles are limited to use with CertainTeed shingles measuring 12" x 36" having a weather exposure ≤ 5".



All components in the roof assembly shall have quality assurance audit in accordance with **F.A.C. Rule 61G20-3**. Refer to the Product Approval of the component manufacturer for components that are produced by a Product Manufacturer other than the report holder on Page 1 of this Evaluation Report.

6. INSTALLATION:


- 6.1 Roof deck, slope, underlayment and fasteners shall comply with FBC 1507.2 / R905.2 and the shingle manufacturer's minimum requirements.
- 6.1.1 Underlayment shall be acceptable to **CertainTeed**, **LLC** and shall hold current Florida Statewide Product Approval, or be Locally Approved per **Rule 61G20-3**, per **FBC Sections 1507.2.3**, **1507.2.4** or **R905.2.3**.
- 6.2 Installation of asphalt shingles shall comply with the CertainTeed, LLC current published instructions, using minimum four (4) nails per shingle in accordance with FBC 1507.2.7 or Section R905.2.6 and the minimum requirements herein.
- 6.2.1 Fasteners shall be in accordance with manufacturer's published requirements, but not less than **FBC 1507.2.6** or **R905.2.5**. Staples are not permitted.
- 6.2.2 Where the roof slope exceeds 21 units vertical in 12 units horizontal, use the "Steep Slope" directions.
- 6.3 CertainTeed asphalt shingles are acceptable for use in reroof (tear-off) or recover applications, subject to the limitations set forth in **FBC Section 1511 or R908** and CertainTeed published installation instructions.

6.4 HIGH-PERFORMANCE STARTER:

6.4.1 Eaves: For the first starter shingle in each roof corner, use five (5) nails as shown below. All other starter shingles require four (4) nails per shingle. Nails must be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads. Apply the 10" starter shingle with its factory-applied sealant stripes at the shingle's lower-most edge and nail firmly into the roof deck as near as possible *(maximum 3") to the eaves edge while avoiding the sealant. With the starter shingle well fastened to the deck and the sealant low on the starter shingle, it can firmly adhere to the first course shingles. *If nailing within 3" is not possible, nail as closely as possible, then lift and adhere the starter shingle to the underlayment and to the supporting structure with CertainTeed FlintBond™ Asphalt Roofing Cement-Caulk Grade, or approved equal.

Rakes: Prior to installation of the field shingles, starter shingles may be applied up the slope along the rake edge with sealant edge placed closest to the rake edge. Fasten as indicated below.

HIGH-PERFORMANCE STARTER SHINGLES

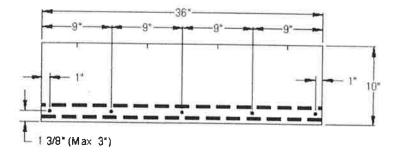




6.5 Presidential® Starter and Presidential® Starter IR:

6.5.1 General: These shingles shall be applied by using two (2) overlapping layers. Begin application of the bottom/lower layer of starter shingles by cutting and applying a 13-3/4" x 20" piece at the lower left rake/eaves corner overhanging rakes and eaves 1/4" to 3/4". Continue along the eaves with full-size 13-1/4" x 40" starter shingles. Each top/upper starter course shingle shall have its 2" top section removed at the perforations, resulting in 11-1/4" x 40" shingles. The colored granule portion of the "top" starter shingles shall be located nearest the lowermost eave edge. Install the first top/upper starter shingle so that it is flush to the left side and bottom edges of the first bottom/lower starter shingle. This first top/upper starter shingle shall be 11-1/4" x 38". Continue along the eaves with 11-1/4" x 40" top/upper starter shingles ensuring that the lower edges are flush with the lower edges of the bottom/lower layer. Reference the product's wrapper for more specific details.

Eaves: Fasten as shown below. Rakes: After applying the starter shingles at the eaves, but prior to installing the field shingles, starter shingles may be applied up the slope at the rake edge. Fasten as shown below.

Fastening: Four nails are required per shingle. Nails shall be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads.

Presidential Starter and Presidential IR Starter Shingles




6.6 UNIVERSAL STARTER:

6.6.1 General: While Universal Starter Strip shingles are specifically designed to be used with shingles 36" length and having a weather exposure of ≤ 5", they may be installed beneath shingles of any length if special precautions are taken. IMPORTANT: In all cases the end joints of the starter and the first course shingles shall NEVER BE LESS THAN 3-1/2" apart.

Eaves: The sealant on starter courses should face out and lie as close as possible to the eaves edge of the roof. Fasten as described below. Rakes: After applying the starter shingles at the eaves, but prior to installing the field shingles, starter shingles may be applied up the slope at the rake edge with sealant facing out and nearest to the outer roof edge. Fasten as described below.

Fastening: Use four nails on these starter shingles as shown below. The sealant on starter courses shall lie as close as possible to the eaves edge of the roof. Nails shall be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads.


UNIVERSAL STARTER SHINGLES

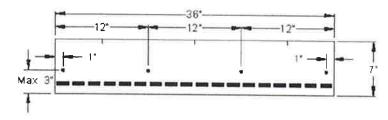



6.7 SWIFTSTART® STARTER SHINGLE:

Fastening: Use four nails, located as shown below

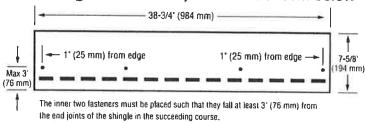


6.8 CT 20™, XT™ 25, XT™ 30 IR:

LOW AND STANDARD SLOPE ENGLISH 12" (305 mm)-305 mm) -(305 mm) -Sealant 1" (25 mm) 5 5/8" (145 mm) 5 1/2 for Norwood Plant METRIC 131/8" -131/8" $(25 \, mm)$ Sealant 1" (25 mm) 6 1/8

Figure 11-3: Use four nails for every fidl sbingle.

STEEP SLOPE

Use **four** nails and six spots of asphalt roofing cement* for every full shingle (*Figure 11-4*). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.



Apply 1" (25 mm) spots of asphalt roofing cement under each tab corner.

Figure 11-4: Use four nails and six spots of asphalt cement on steep slopes. *CAUTION: Excessive use of roofing cement can cause shingles to blister.

Hip & Ridge: Cut Shingles

Note: The use of BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant" in accordance with CertainTeed requirements is required for the ASTM D3161, Class F wind rating.

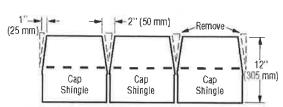


Figure 11-24: Cut tabs, then trim back to make cap shingles (English dimensions shown).

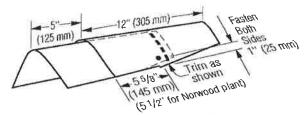


Figure 11-25: Installation of caps along the hips and ridges.



6.9 ARCADIA™:

LOW AND STANDARD SLOPE

Use SIX nails for every full shingle located as shown below.

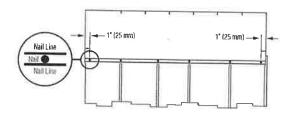


Figure 2: Use six nails for every full shingle.

STEEP SLOPE

Use SIX nails and FOUR spots of asphalt roofing cement for every full shingle as shown below, Apply asphalt roofing cement 1"(25 mm) from edge of shingle. Asphalt roofing cement meeting ASTM D 4586 Type II is suggested.






Figure 3: Use six nails and four spots of asphalt roofing cement on steep slopes.

Hip & Ridge: Cedar Crest® or Cedar Crest® IR

Use two (2), minimum 1¾-inch long fasteners per shingle. For the starter shingle, place fastener 1-inch from each side edge and about 2-inch up from the starter shingle's exposed butt edge, ensuring minimum ¾-inch embedment into the deck, or full penetration through the deck. For each full Cedar Crest shingle, place fasteners 8-5/8-inch up from its exposed butt edge and 1-inch from each side edge.

Note: The use of BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant" in accordance with CertainTeed requirements is required for the ASTM D3161, Class F wind rating.

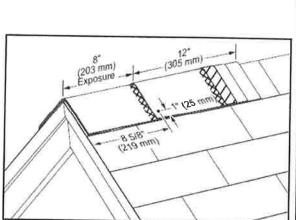

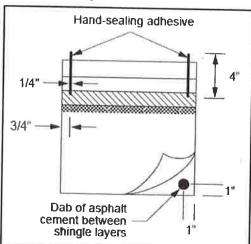




6.10 BELMONT® OR BELMONT® IR:


Low and Standard Slope (2:12 to 21:12):

Use FIVE nails for every full Belmont shingle, located as shown below.

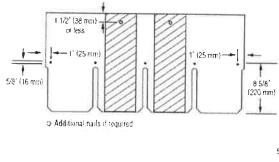

Steep Slope (greater than 21:12):

Use SEVEN nails and EIGHT spots of asphalt roofing cement** for every full Belmont shingle. Apply asphalt roofing cement 1" (25mm) from edge of shingle. See below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

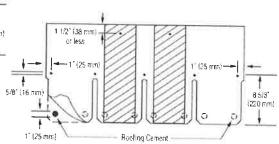

Hip & Ridge:

Option 1: For Belmont®, refer to instructions for Cedar Crest® or Cedar Crest® IR.

For Belmont® IR, refer to instructions for Cedar Crest® IR.

Note: The use of BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant" in accordance with CertainTeed requirements is required for the ASTM D3161, Class F wind rating.

Option 2: For Belmont®: Shangle® Ridge

Note: The use of BASF "Sonolastic® NP1"" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant" in accordance with CertainTeed requirements is required for the ASTM D3161, Class F wind rating.




Figure 17-18: Shangle[™] Ridge.

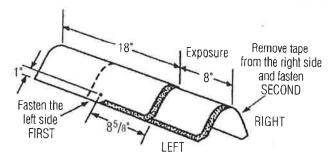


Figure 17-19: Installation of Shangle® Ridge shingles on hips and ridges.



6.11 CARRIAGE HOUSE® AND GRAND MANOR®:

LOW AND STANDARD SLOPE

Use five nails for every full Shangle.

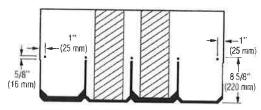


Figure 17-4: Use five nails for every full Grand Manor Sbangle. Carriage House Sbangle, or Centennial Slate.

STEEP SLOPE

Use seven nails and three spots of asphalt roofing cement for every full Grand Manor Shangle. Use five nails and three spots of asphalt roofing cement for every full Carriage House Shangle and Centennial Slate. Apply asphalt roofing cement 1" (25 mm) from edge of shingle (Figure 17-5). Asphalt roofing cement meeting ASTM D4586 Type II is suggested.


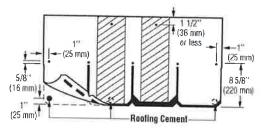


Figure 17-5: When installing Grand Manor Shangles on steep slopes, use seven nails and three spots of asphalt roofing cement.


Hip & Ridge: Refer to instructions for Shangle® Ridge.

6.12 LANDMARK®, LANDMARK® PRO, LANDMARK® PRO ARCHITECT 80, LANDMARK PRO SOLARIS®, LANDMARK® PREMIUM, LANDMARK SOLARIS®, LANDMARK SOLARIS® IR, LANDMARK SOLARIS® GOLD/PLATINUM OR NORTHGATE®:

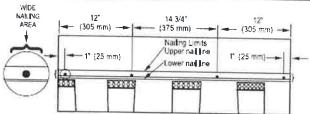

Nating areas for low and standard slopes (from 2:12 to 21.12)

Nati between upper & lower times as shown above.

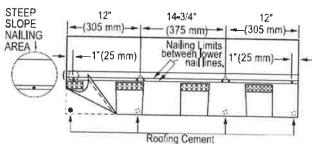

Nailing areas for steep slopes (greater than 21:12) and "Storm-Nailing" Nail between lower 2 nail lines as shown above.




Hip & Ridge:

Option 1: Refer to instructions for Cedar Crest® or Cedar Crest® IR.

Option 2: NorthGate® Accessory or Shadow Ridge®

Note: The use of BASF "Sonolastic® NP1™" adhesive or Henkel "PL® Polyurethane Roof & Flashing Sealant" in accordance with CertainTeed requirements is required for the ASTM D3161, Class F wind rating. (Use of sealant is optional for Shadow Ridge® produced in Oxford, NC.)

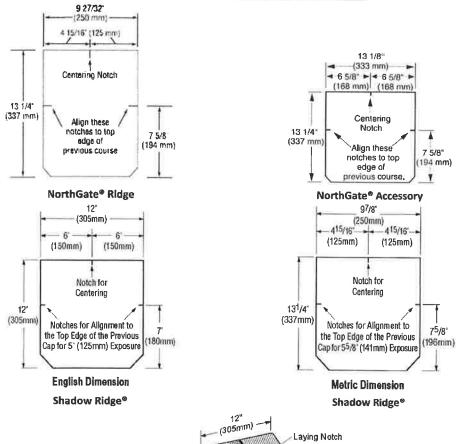




Figure 13-20: Use laying notches to center shingles on hips and ridges, and to locate the correct exposure.



6.13 LANDMARK® TL:

LANDMARK TL

LANDMARK TL

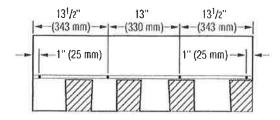


Figure 13-4: Use four nails for every full shingle.

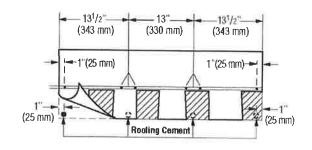


Figure 13-5: Use six nails and four spots of aspbalt roofing cement on steep slopes.

Hip & Ridge: Refer to instructions for Cedar Crest®, Cedar Crest® IR, NorthGate® Accessory or Shadow Ridge®.

6.14 PRESIDENTIAL SHAKE®, PRESIDENTIAL SHAKE® IR, PRESIDENTIAL SHAKE® TL, PRESIDENTIAL SOLARIS®:

LOW AND STANDARD SLOPE:

For low and standard slopes, use five nails for each full Presidential shingle as shown below.

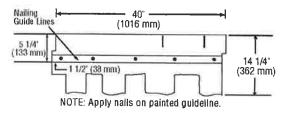


Figure 16-6: Fastening Presidential and Presidential TL Sbake sbingles on low and standard slopes.

STEEP SLOPE:

For steep slopes, use nine nails for each full Presidential shingle and apply 1" diameter spots of asphalt roofing cement under each shingle tab. After applying 5 nails in between the nailing guide lines, apply 4 nails 1" above tab cutouts making certain tabs of overlying shingle cover nails.




Figure 16-7: Fastening Presidential and Presidential T/L Sbake sbingles on steep slopes.

Hip & Ridge: Refer to instructions for Cedar Crest® or Cedar Crest® IR.



6.15 HIGHLAND SLATE®:

LOW AND STANDARD SLOPE:




Figure 11-3: Use FIVE nails for every Highland Slate shingle.

STEEP SLOPE:

Use FIVE nails and BIGHT spots of asphalt roofing cement* for each full Highland Slate shingle. For Miami-Dade, SIX nails are required. Apply 1* diameter spots of asphalt roofing cement under each tab corner. Asphalt roofing cement meeting ASTM D4586 Type II is suggested.

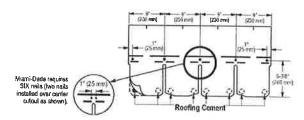


Figure 11-3A: Use FIVE nails and eight spots of asphalt roofing cement under each tab corner.


*CAUTION: Excessive use of roofing cement can cause shingles to blister.

Hip & Ridge: Refer to instructions for Cedar Crest®, Cedar Crest® IR or Shangle Ridge®.

6.16 PATRIOT:

LOW AND STANDARD SLOPE


Use FOUR nails for every full shingle located as shown below.



STEEP SLOPE

Use FOUR nails and four spots of asphalt roofing cement for every full shingle as shown below. Asphalt roofing cement meeting ASTM D4586 Type II is suggested. Apply 1*(25 mm) spots of asphalt roofing cement as shown.

CAUTION: Excessive use of roofing cement can cause shingles to blister.



Hip & Ridge: Refer to instructions for Cedar Crest®, Cedar Crest® IR, NorthGate® Accessory, Shadow Ridge® or Shangle Ridge®.

7. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction in order to properly evaluate the installation of this product.

8. MANUFACTURING PLANTS:

Contact the named QA entity for manufacturing facilities covered by **F.A.C. Rule 61G20-3** QA requirements. Refer to Section 4 herein for products and production locations having met codified material standards.

9. QUALITY ASSURANCE ENTITY:

UL LLC - QUA9625; (414) 248-6409; karen.buchmann@us.ul.com

- END OF EVALUATION REPORT -



Halsey Beshears, Secretary

STATE OF FLORIDA

DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

CONSTRUCTION INDUSTRY LICENSING BOARD

THE ROOFING CONTRACTOR HEREIN IS CERTIFIED UNDER THE PROVISIONS OF CHAPTER 489, FLORIDA STATUTES

D'KEY ROOFING LLC

LICENSE NUMBERICCC1329157

EXPIRATION DATE: AUGUST 31, 2022

Always verify licenses online at MyFloridaLicense.com

Do not alter this document in any form.

This is your license, it is unlawful for anyone other than the licensee to use this document,



GOLDKEY-03

BECKA

ACORD

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

Ins	if SUBROGATION IS WAIVED, sui this certificate does not confer right ODUCER surance Office of America, Inc.				NAME	ACT David	(s). Burr				sacinent o
1000 West State Roan 434				PHONE							
Longwood, FL 32750					[A/C, No, Ext): (407) 998-5445 15445 FAX (A/C, No): (407) 788-793						788-7933
									-		
INSURED				INSURER(S) AFFORDING COVERAGE INSURER A : Berkley Specialty Insurance Company						NAIC #	
	Gold Key Roofing LLC					INSURER B : Auto-Owners Insurance Company					
4874 S. Orange Ave					INSURER C:						18988
Orlando, FL 32806					INSURER D:						-
					INSURER E :						
CO	VERAGES CE	RTIF	CAT	E NUMBER:	INSURE						
11	DICATED NOTINET THAT THE POLICE	CIES C	F IN	SURANCE LISTED BELOW	HAVE BE	FN ISSUED	TO THE INO	REVISION NUM	MBER:		
C	HIS IS TO CERTIFY THAT THE POLICI DICATED. NOTWITHSTANDING ANY ERTIFICATE MAY BE ISSUED OR MAY CLUSIONS AND CONDITIONS OF SUCI	Y PER	TAIN	ENT, TERM OR CONDITIO	N OF A	NY CONTRA	ACT OR OTH	URED NAMED ABO ER DOCUMENT WIT	VE FOR	THE PO	LICY PERIOR
NSR LTR	CCLUSIONS AND CONDITIONS OF SUCI				DEEN KI	FOUCED BY	PAID CLAIM	8	JBJEC1	TO ALL	THE TERMS
A	X COMMERCIAL GENERAL LIABILITY	INSD	SUBF	POLICY NUMBER		POLICY EFF	POLICY EXP				
	CLAIMS-MADE X OCCUR				T		LINGUIST TY	EACH OCCURRENCE		NTS	1 000 4
	T SOCOR	1		CGL0138686		2/19/2021	2/19/2022		D	\$	1,000,0
			H					MED EXP (Any one p		5	5,0
	GEN'L AGGREGATE LIMIT APPLIES PER:				- 1			PERSONAL & ADV IN		s	1,000,0
	POLICY X PRO-			0	1	(4		GENERAL AGGREGA		S	2,000,0
1	OTHER:							PRODUCTS - COMPA		s	2,000,0
	AUTOMOBILE LIABILITY									s	
F	X ANY AUTO			5323285900	1.	2/19/2021	014010	COMBINED SINGLE L (Ea accident)	IMIT	s	1,000,0
-	OWNED AUTOS ONLY SCHEDULED AUTOS				11	19/2021	2/19/2022	BODILY INJURY (Per		\$	
1	X AUTOS ONLY X NOTOS WILED							BODILY INJURY (Per	accident)	s	
4	Juneary J. W.							PROPERTY DAMAGE (Per accident)		\$	
X	UMBRELLA LIAB X OCCUR EXCESS LIAB									\$	
1	DED RETENTIONS		1	X0138687	2	/19/2021	2/19/2022	EACH OCCURRENCE AGGREGATE	-	\$	1,000,00
W	DRKERS COMPENSATION ID EMPLOYERS' LIABILITY	-	-+				10000	AGGREGATE		\$	1,000,00
AN	Y PROPRIETOR/PARTNER/EXECUTIVE Y/N	- 1						PER STATUTE	OTH-	\$	
(M		N/A			1			E.L. EACH ACCIDENT		S	
DE	es, describe under SCRIPTION OF OPERATIONS below					- 1		EL DISEASE - EA EMP			
1			1					E.L. DISEASE - POLICY		\$	
					- 1	1					
ey /	TION OF OPERATIONS / LOCATIONS / VEHICLES Allan Hewitt, Qualifier C1329157	S (ACO	RD 10	1, Additional Remarks Schodule							
CC	C1329157			, sendadie, f	nay be atta	ched (f more s	pace is required	1)			
CBC	060354										
											i
											ĺ
TIF	ICATE HOLDER										1
	THE THE PARTY OF T		-	CA	NCELL	ATION			-		
						A CONTRACTOR					
				S	HOULD A	NY OF THE	ABOVE DESC	CRIBED POLICIES B	E CAN	CELLED	EFORE
				Ä	CCORDA	NCE WITH T	HE POLICY F	CRIBED POLICIES B EOF, NOTICE WIL PROVISIONS.	L BE	DELIVE	RED IN
	City of Dall . 1 -										
City of Belle Isle 1600 Nela Ave.				UTHORIZED REPRESENTATIVE							
					1/2	n R					- 1
_	Belle Isle, FL 32809			, t	ault	0.12					1

Tax Collector Scott Randolph

Local Business Tax Receipt

Orange County, Florida

2020

EXPIRES

9/30/2021

1806 1801

CERT ROOFING CONTRA CERT BUILDING CONTR

\$40.00 \$30.00 1 EMPLOYEE

15 EMPLOYEES 5000 BUSINESS OFFICE

\$30,00

1806-1154716 5 EMPLOYEES

TOTAL TAX PREVIOUSLY PAID TOTAL DUE

\$100.00 \$100.00 \$0.00

HEWITT III HARRY HEWITT JEFFREY ALLAN (QUALIFIER)

GOLD KEY ROOFING LLC 4874 S ORANGE AVE ORLANDO FL 32806-6931

4874 S ORANGE AVE N - EDGEWOOD, 32806

PAID: \$100.00 0099-00962062 9/2/2020

Tax Collector Scott Randolph

Local Business Tax Receipt

Orange County, Florida

This local Business Tex Receipt is in addition to and not in lieu of any other lex required by law or municipal ordinance. Businesses are subject to regulation of zoning, health and other lewful authorities. This receipt is valid from October 1 through September 30 of receipt year. Dollinquent penalty is added October 1.

OOLPH, TAL

2020

EXPIRES

SCOTT

9/30/2021

CTOR

1806-1154716

1806 CERT ROOFING CONTRA CERT BUILDING CONTR 1801

\$40.00 \$30.00

15 EMPLOYEES 5000 BUSINESS OFFICE 1 EMPLOYEE

\$30.00

5 EMPLOYEES

TOTAL TAX \$100.00 PREVIOUSLY PAID \$100.00 TOTAL DUE -\$0.00

4874 S ORANGE AVE N - EDGEWOOD, 32806

PAID: \$100.00 0099-00962062 9/2/2020

HEWITT III HARRY HEWITT JEFFREY ALLAN (QUALIFIER)

GOLD KEY ROOFING LLC 4874 S ORANGE AVE ORLANDO FL 32806-6931

This receipt is official when validated by the Tax Gollector.

GE COUNTY.

Orange County Code requires this local Business Tax Receipt to be displayed conspicuously at the place of business in public view. It is subject to inspection by all duly authorized officers of the County.